

September 2012

# DFB2005 - DFB20100 Glass Passivated Bridge Rectifiers

# **Features**

- UL Certificate # E326243
- Glass Passivated Junction
- · Ideal for Printed Circuit Board
- Reliable Low Cost Construction
- Plastic Material has Underwriters Laboratory Flammability Classification 94V-0
- Surge Overload Rating to 250 Amperes Peak
- High Case Dielectric Strength of 2000 V<sub>RMS</sub>
- Isolated Voltage from Case to Lead Over 2500 Volts



TS-6P

# **Absolute Maximum Ratings\*** T<sub>A</sub> = 25°C unless otherwise noted

Symbol	Parameter	Value							
		DFB20 05	DFB20 10	DFB20 20	DFB20 40	DFB20 60	DFB20 80	DFB20 100	Units
V <sub>RRM</sub>	Maximum Recurrent Peak Reverse Voltage	50	100	200	400	600	800	1000	٧
V <sub>RMS</sub>	Maximum RMS Voltage	35	70	140	280	420	560	700	V
V <sub>DC</sub>	Maximum DC Blocking Voltage	50	100	200	400	600	800	1000	V
I <sub>(AV)</sub>	Maximum Average Forward Rectified Current				20				Α
I <sub>FSM</sub>	Peak Forward Surge Current (8.3mS Single Half-wave)				250				Α
$R_{\theta JC}$	Typical Thermal Resistance**				4.75				°C/W
$T_J$	Operating Temperature Range	-55 to +150			°C				
T <sub>STG</sub>	Storage Temperature Range	-55 to +150			°C				

<sup>\*</sup> Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%

# **Electrical Characteristics** $T_A = 25$ °C unless otherwise specified

Symbol	Parameter Test condition		Value	Unit
V <sub>F</sub>	Maximum Instantaneous Forward Voltage	@ 10A @ 20A	1.0 1.1	V
I <sub>R</sub>	Maximum DC Reverse Current at Rated DC Blocking Voltage	@ T <sub>A</sub> = 25°C @ T <sub>A</sub> = 125°C	10 500	μА
l <sup>2</sup> t	Rating for fusing (t < 8.3mS)		259	A <sup>2</sup> S
Cj	Typical Junction Capacitance per leg*		140	pF

<sup>\*</sup> Measured at 1MHz and applied Reverse bias of 4.0V DC.

<sup>\*\*</sup> Device mounted on 4" x 5" x 0.25" Al-plate heat sink.

# **Typical Performance Characteristics**

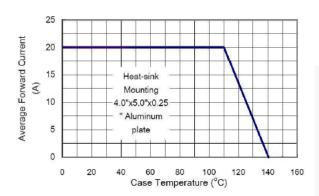


Figure 1. Maximum Derating Curve for Output Current

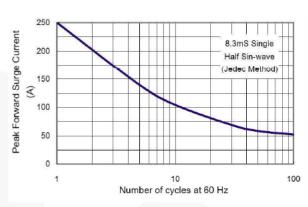


Figure 2. Maximum Forward Surge Current per Leg

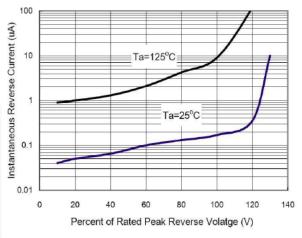


Figure 3. Typical Reverse Characteristics per Leg

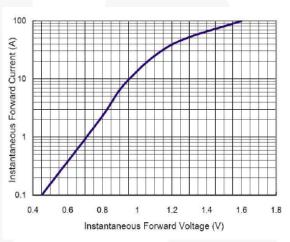
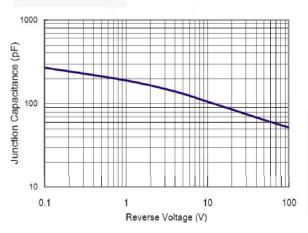



Figure 4. Typical Forward Characteristics per Leg




**Figure 5. Typical Junction Capacitance** 

# **Physical Dimensions**

# TS-6P

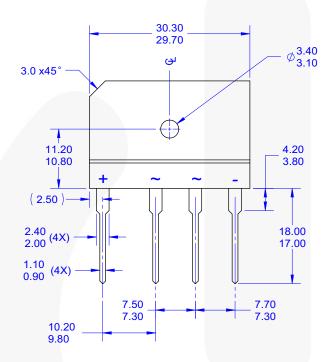

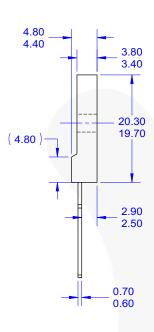

# NOTES:

- A. THIS PACKAGE DOES NOT CONFORM TO ANY STANDARDS.
  B. ALL DIMENSIONS ARE IN MILLIMETERS.
  C. DIMENSIONS ARE EXCLUSIVE OF BURRS, MOLD FLASH AND TIE BAR PROTRUSIONS.
  D. DRAWING FILE NAME: TS6P04AREV1

**Dimensions in Millimeters** 





#### **TRADEMARKS**

The following includes registered and unregistered trademarks and service marks, owned by Fairchild Semiconductor and/or its global subsidiaries, and is not intended to be an exhaustive list of all such trademarks.

 $\begin{array}{ll} 2\mathsf{Cool}^{\scriptscriptstyle\mathsf{TM}} & \mathsf{F}\text{-}\mathsf{PFS}^{\scriptscriptstyle\mathsf{TM}} \\ \mathsf{AccuPower}^{\scriptscriptstyle\mathsf{TM}} & \mathsf{FRFET}^{\scriptscriptstyle\mathsf{\$}} \end{array}$ 

AX-CAP $^{\text{TM}}$  Global Power Resource SM GreenBridge GreenBridge

Build it Now™ Green FPS™

CorePLUS™ Green FPS™ e-Series™

CorePOWER™ Gmax™
CROSSVOLT™ GTO™
CTL™ IntelliMAX™
Current Transfer Logic™ ISOPLANAR™

DEUXPEED® Making Small Speakers Sound Louder

 Dual Cool™
 and Better™

 EcoSPARK®
 MegaBuck™

 EfficientMax™
 MICROCOUPLER™

 ESBC™
 MicroFET™

Fairchild® MicroPak™
MicroPak™
MicroPak™
MicroPak™
MicroPak™
MicroPak™
MicroPak™
MillerDrive™
MotionMax™
MotionMax™
mWSaver™
FACT® OptoHiT™
FAST® OPTOLOGIC®
FastvCore™

FAST® OptoHiT™
OPTOLOGIC®
FastvCore™ OPTOPLANAR®
FETBench™
FlashWriter®\*

PowerTrench<sup>®</sup> PowerXS™

Programmable Active Droop™

QFET<sup>®</sup> QS™ Quiet Series™

Quiet Series™ RapidConfigure™

Saving our world, 1mW/W/kW at a time™

SignalWise™ SmartMax™ SMART START™

Solutions for Your Success™

SPM®
STEALTH™
SUPERSOT™-3
SUPERSOT™-6
SUPERSOT™-6
SUPERSOT™-8
SUPERSOT™-8
SUPERSOT™-8
SUPERSOT™-8
SUPERSOT™-8
SUPERSOT™-8
SYNCFET™
SYNC-Lock™
SYSTEM
GENERAL®\*\*

Franchise

TinyBoost™
TinyBoost™
TinyCalc™
TinyLogic®
TINYOPTO™
TinyPower™
TinyPWM™
TinyPWI™
TinyWire™
TranSiC™
TriFault Detect™

The Power Franchise®

TRUECURRENT®\*

µSerDes™

UHC®
Ultra FRFET™
UniFET™
VCX™
VisualMax™
VoltagePlus™

\* Trademarks of System General Corporation, used under license by Fairchild Semiconductor.

#### ISCI AIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION, OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS. THESE SPECIFICATIONS DO NOT EXPAND THE TERMS OF FAIRCHILD'S WORLDWIDE TERMS AND CONDITIONS, SPECIFICALLY THE WARRANTY THEREIN, WHICH COVERS THESE PRODUCTS.

### LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

## As used herein:

- Life support devices or systems are devices or systems which, (a) are
  intended for surgical implant into the body or (b) support or sustain
  life, and (c) whose failure to perform when properly used in
  accordance with instructions for use provided in the labeling, can be
  reasonably expected to result in a significant injury of the user.
- A critical component in any component of a life support, device, or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

## **ANTI-COUNTERFEITING POLICY**

Fairchild Semiconductor Corporation's Anti-Counterfeiting Policy. Fairchild's Anti-Counterfeiting Policy is also stated on our external website, www.fairchildsemi.com, under Sales Support.

Counterfeiting of semiconductor parts is a growing problem in the industry. All manufacturers of semiconductor products are experiencing counterfeiting of their parts. Customers who inadvertently purchase counterfeit parts experience many problems such as loss of brand reputation, substandard performance, failed applications, and increased cost of production and manufacturing delays. Fairchild is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. Fairchild strongly encourages customers to purchase Fairchild parts either directly from Fairchild or from Authorized Fairchild Distributors who are listed by country on our web page cited above. Products customers buy either from Fairchild directly or from Authorized Fairchild Distributors are genuine parts, have full traceability, meet Fairchild's quality standards for handling and storage and provide access to Fairchild's full range of up-to-date technical and product information. Fairchild and our Authorized Distributors will stand behind all warranties and will appropriately address any warranty issues that may arise. Fairchild will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources. Fairchild is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

## PRODUCT STATUS DEFINITIONS

# **Definition of Terms**

<b>Datasheet Identification</b>	Product Status	Definition		
Advance Information	Formative / In Design	Datasheet contains the design specifications for product development. Specifications may change in any manner without notice.		
Preliminary	First Production	Datasheet contains preliminary data; supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design.		
No Identification Needed	Full Production	Datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve the design.		
Obsolete	Not In Production	Datasheet contains specifications on a product that is discontinued by Fairchild Semiconductor. The datasheet is for reference information only.		

Rev. 162