

# 1224-15/T3C3-1QSC

#### **Features**

- Popular T-1 colorless 3mm package.
- High luminous power.
- Typical chromaticity coordinates x=0.29, y=0.28 according to CIE1931.
- Bulk, available taped on reel.
- ESD-withstand voltage: up to 4KV
- The product itself will remain within RoHS compliant version.



#### **Descriptions**

- The series is designed for application required high luminous intensity.
- The phosphor filled in the reflector converts the blue emission of InGaN chip to ideal white.

#### **Applications**

- Outdoor Displays
- Optical Indicators
- Backlighting
- Marker Lights

#### **Device Selection Guide**

LED Part No.	Chip Material	<b>Emitted Color</b>	Lens Color
1224-15/T3C3-1QSC	InGaN	White	Water Clear

Everlight Electronics Co., Ltd. Device Number DLE-122-104 http\\:www.everlight.com

Established date: 09-26-2005


Rev 1

Page: 1 of 9



# 1224-15/T3C3-1QSC

### **Package Dimensions**

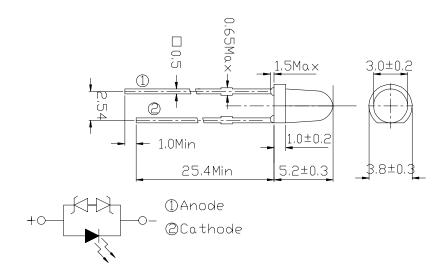

#### **Notes:**

- 1.All dimensions are in millimeters, and tolerance is 0.25mm except being specified.
- 2.Lead spacing is measured where the lead emerges from the package.
- 3. Protruded resin under flange is 1.5mm Max. LED.

#### **Absolute Maximum Ratings (Ta=25°C)**

Parameter	Symbol	Rating	Unit
Continuous Forward Current	$I_{F}$	30	mA
Peak Forward Current(Duty /10 @ 1KHZ)	$I_{FP}$	100	mA
Reverse Voltage	$V_R$	5	V
Operating Temperature	$T_{\mathrm{opr}}$	-40 ~ +85	$^{\circ}\! \mathbb{C}$
Storage Temperature	$T_{stg}$	-40 ~ +100	$^{\circ}\!\mathbb{C}$
Soldering Temperature (T=5 sec)	$T_{sol}$	260 ± 5	$^{\circ}\! \mathbb{C}$
Power Dissipation	$P_d$	100	mW
Zener Reverse Current	Iz	100	mA
Electrostatic Discharge	ESD	4K	V

**Notes:** Soldering time  $\leq 5$  seconds.

Everlight Electronics Co., Ltd.

http\\:www.everlight.com

Rev 1

Page: 2 of 9


Device Number DLE-122-104

Established date: 09-26-2005



# 1224-15/T3C3-1QSC

**Production Designation** 

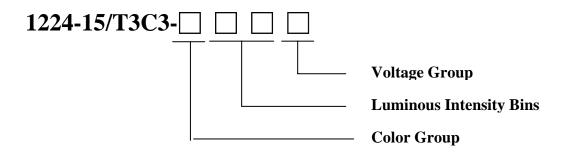

## **Electro-Optical Characteristics (Ta=25°C)**

Parameter	Symbol	Condition	Min.	Тур.	Max.	Units
Forward Voltage	$V_{\mathrm{F}}$	I <sub>F</sub> =20mA	3.0		3.6	V
Zener Reverse Voltage	Vz	Iz=5mA	5.2			V
Reverse Current	$I_R$	V <sub>R</sub> =5V			50	uA
Luminous Intensity	$I_{\mathrm{V}}$	I <sub>F</sub> =20mA	3600		7150	mcd
Viewing Angle	2 \theta 1/2	I <sub>F</sub> =20mA		30		deg
Chromaticity Coordinates	X	I 20 A		0.29		
	у	I <sub>F</sub> =20mA		0.28		

Everlight Electronics Co., Ltd.
Device Number DLE-122-104

http\\:www.everlight.com Established date: 09-26-2005

Rev 1

Page: 3 of 9



# 1224-15/T3C3-1QSC

**Luminous Intensity Combination (mcd at 20mA)** 

Rank	Min	Max			
Q	3600	4500			
R	4500	5650			
S	5650	7150			

<sup>\*</sup>Measurement Uncertainty of Luminous Intensity: ±15%

Forward Voltage Combination (V at 20mA)

Group		C	
Rank	1	2	3
Min.	3.00	3.20	3.40
Max.	3.20	3.40	3.60

<sup>\*</sup>Measurement Uncertainty of Forward Voltage: ±0.1V


Color Combination (at 20mA)

Group	Bins
1	A1+A0+B3+B4+B5+B6+C0



# 1224-15/T3C3-1QSC

## **CIE Chromaticity Diagram**

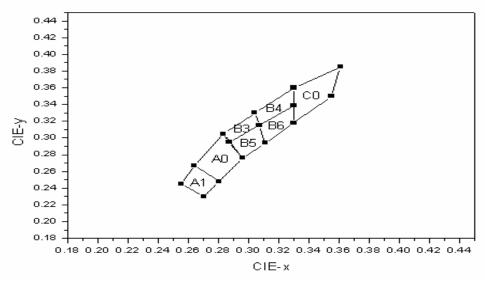

## Color Ranks (IF=20mA, Ta=25°C)

Color Ranks		CIE			
A 1	X	0.255	0.264	0.280	0.270
A1	Y	0.245	0.267	0.248	0.230
<b>A</b> O	X	0.264	0.283	0.296	0.280
A0	Y	0.267	0.305	0.267	0.248
D2	X	0.283	0.304	0.307	0.287
В3	Y	0.305	0.330	0.315	0.295
D.4	X	0.304	0.330	0.330	0.307
B4	Y	0.330	0.360	0.339	0.315
D.5	X	0.287	0.307	0.311	0.296
В5	Y	0.295	0.315	0.294	0.276
	X	0.307	0.330	0.330	0.311
В6	Y	0.315	0.339	0.318	0.294
	X	0.330	0.361	0.355	0.330
C0	Y	0.360	0.385	0.350	0.318

\*Measurement uncertainty of the color coordinates: ±0.01

Everlight Electronics Co., Ltd.

http\\:www.everlight.com

005

Page: 5 of 9

Device Number DLE-122-104

Established date: 09-26-2005


Established by: Amy Ma

Rev 1




# 1224-15/T3C3-1QSC


#### **Typical Electro-Optical Characteristics Curves**

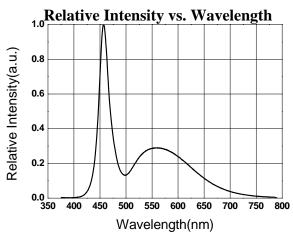


#### **Relative Intensity vs. Forward Current**

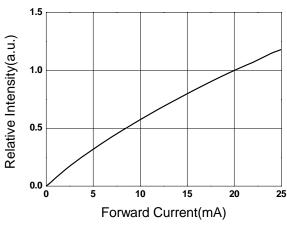


#### reductive intelligity visit of ward current

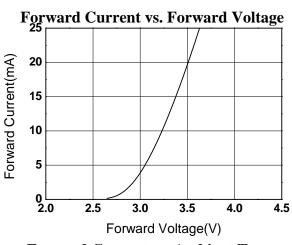


Forward Current vs. Ambient Temp.

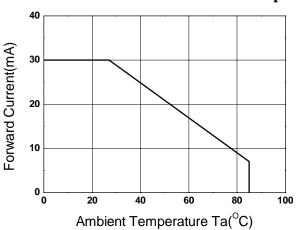

#### **Chromaticity Coordinate vs. Forward Current**

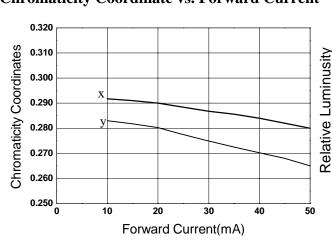

#### Relative Intensity vs. Angle Displacement

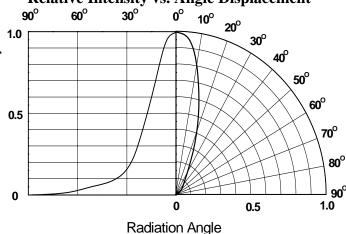

Everlight Electronics Co., Ltd. Device Number DLE-122-104

http\\:www.everlight.com Established date: 09-26-2005 Rev 1

Page: 6 of 9



# 1224-15/T3C3-1QSC

### **Label Form Specification**

CPN: Customer's Production Number

P/N : Production Number QTY: Packing Quantity

CAT: Ranks HUE: Space REF: Reference

LOT No: Lot Number

MADE IN TAIWAN: Production Place

Everlight Electronics Co., Ltd.

Device Number DLE-122-104

http\\:www.everlight.com Established date: 09-26-2005

Rev I


Page: 7 of 9



## 1224-15/T3C3-1QSC

#### **Notes**

- 1. Above specification may be changed without notice. EVERLIGHT will reserve authority on material change for above specification.
- 2. When using this product, please observe the absolute maximum ratings and the instructions for using outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.
- These specification sheets include materials protected under copyright of EVERLIGHT corporation. Please don't reproduce or cause anyone to reproduce them without EVERLIGHT's consent.
- 4. Below the zener reference voltage Vz, all the current flows through LED and as the voltage rises to Vz, the zener diode "breakdown." If the voltage tries to rise above Vz current flows through the zener branch to keep the voltage at exactly Vz.
- 5. When the LED is connected using serial circuit, if either piece of LED is no light up but current can't flow through causing others to light down. In new design, the LED is parallel with zener diode, if either piece of LED is no light up but current can flow through causing others to light up

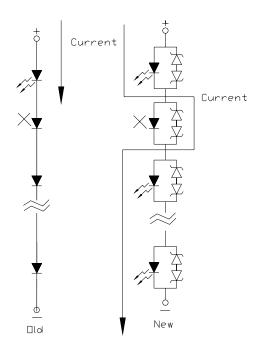

Everlight Electronics Co., Ltd.

Device Number DLE-122-104

http\\:www.everlight.com Established date: 09-26-2005 Rev 1

Page: 8 of 9



# 1224-15/T3C3-1QSC

#### 6. Soldering Condition

Careful attention should be paid during soldering. When soldering, leave more then 3mm from solder joint to case, and soldering beyond the base of the tie bar is recommended.

Avoiding applying any stress to the lead frame while the LEDs are at high temperature particularly when soldering.

Recommended soldering conditions:

Hand Soldering		DIP Soldering		
Temp. at tip of iron	400°C Max. (30W Max.)	Preheat temp.	100°C Max. (60 sec Max.)	
Soldering time	3 sec Max.	Bath temp.	265 Max.	
Distance	3mm Min.(From solder joint to case)	Bath time.	5 sec Max.	
		Distance	3mm Min.	

EVERLIGHT ELECTRONICS CO., LTD.

Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C

Fax: 886-2267-6244, 2267-6189, 2267-6306

Tel: 886-2-2267-2000, 2267-9936

http:\\www.everlight.com

Everlight Electronics Co., Ltd. http\\:www.everlight.com Rev 1 Page: 9 of 9 Device Number DLE-122-104 Established date: 09-26-2005 Established by: Amy Ma