
SWITCHCRAFT, INC. 5565 N. Elston Ave. • Chicago, IL 60630 • 773 792-2700 • FAX: 773 792-2129 • www.switchcraft.com

# MINIATURE TELEPHONE JACKS, RIGHT ANGLE, PC MOUNT





Right-angle miniature phone jacks provide low-profile packaging. Single and twin 3-conductor jacks provide plug-jack access to communication circuits for patching and/or testing. Tips and rings are shunted. These jacks mate with Switchcraft miniature TT® plugs and patch cords.

Jacks are designed for right-angle mounting on .062 inch (1.6 mm) maximum thickness PC boards. Snap-on covers in colors are available and can be installed or removed in the field without special tools. Covers and jacks may be ordered in different colors for color coded circuits.

# **SPECIFICATIONS**

## **ELECTRICAL**

Dielectric Withstanding Voltage: 500 V AC Contact Resistance: .020  $\Omega$  maximum (initial),

.030 Ω maximum (after life test).

Insulation Resistance:  $10^{10} \Omega$  at 500 V DC (initial).

## **MECHANICAL**

Shock: MIL-STD 202 Method 213. Vibration: MIL-STD 202 Method 201.

Insertion Force: 7 pounds maximum (31.14 N). Withdrawal Force: 1.5 pounds minimum (6.67 N).

Life: 10,000 cycles.

#### **MATERIALS**

Housing: Thermoplastic UL 94V-0. Springs: Copper alloy, plated.


Contacts: Gold alloy (WEco #1) crossbar.

#### **ENVIRONMENTAL**

Temperature Limits: -55°C to +85°C (non-operating).

Thermal Shock: MIL-STD 202 Method 107. Salt Spray: MIL-STD 202 Method 101. Humidity: MIL-STD 202 Method 106, less

steps 7A and 7B.



### ORDERING INFORMATION

Jack	Cover				Typical
Part No.	Part No.	Color	Schematic <sup>1</sup>	Cond.	Mating Plug <sup>2</sup>

#### SINGLE JACKS

RTT34B01	<b>₽286301</b>	Red			
RTT34B02	P286302	Black			
RTT34B04	<b>○P286304</b>	Blue	XII	3	TT-253
RTT34B05	P286305	White	) An	3	11-200
○RTT34B07	P286307	Orange			
○RTT34B08	ेP286308	Yellow			

#### **TWIN JACKS**

RTT8701	6401	Red			į
RTT8702 P28	6402	Black			
RTT8704 0P28	6404	Blue	Twin	Twin	TT-263
RTT8705 P28	P286405		ΧII	3	11-200
○RTT8707 ○P28	6407	Orange			
○RTT8708 ○P28	6408	Yellow			

<sup>1</sup> See schematic diagrams on pages 65 and 66

#### **ORDERING**

- 1. Order jacks and covers separately from table.
- 2. Covers can be ordered assembled on special order.
- 3. To order RTT jack with cover installed, add the letter C after RTT in part number. Special order only.
- 4. To order RTT lack with Snap-in terminals, add the letter S to the end of the part number. Special order only.
- 5. For all special orders items, contact Switchcraft.

#### RTT JACK PART NUMBERING SYSTEM

Series	Co	over Option	Circuitry		Jack Color	
RTT Right Angle TT Jack	Blank-	No Cover (standard)	34B-	XΗ	01-	Red
Control of the Contro	C-	Cover Supplied	87-	Two XII Circuits	02-	Black
		California Sala Sala Sala de Calada servira della periori della periori della periori della servica di Arteria			04-	Blue
					05-	White
		AND ADDRESS OF THE PART OF THE			07-	Orange
114					08-	Yellow

DIMENSIONS ARE FOR REFERENCE ONLY

NOTE: Contact your Switchcraft Representative for price and delivery


<sup>2</sup> See Mating Plugs Section.


Special order only: contact Switchcraft for price and delivery.


## MINIATURE TELEPHONE JACKS


SWITCHCRAFT, INC. 5555 N. Elston Ave. • Chicago, IL 60630 • 773 792-2700 • FAX: 773 792-2129 • www.switchcraft.com


# MINIATURE TELEPHONE JACKS, RIGHT ANGLE, PC MOUNT

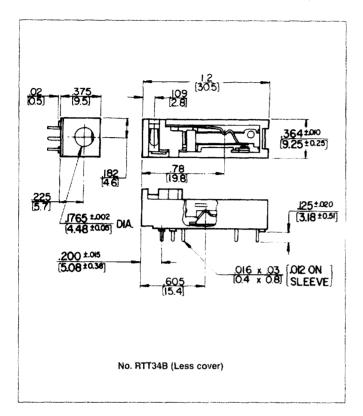






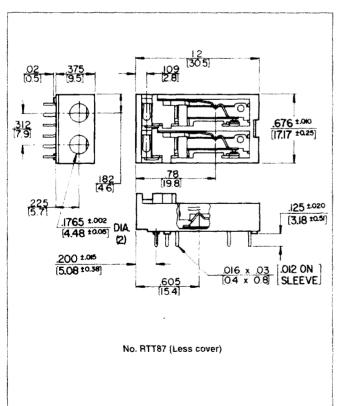





DIMENSIONS ARE FOR REFERENCE ONLY

(mm)

NOTE: Contact your Switchcraft Representative for price and delivery.