

Data Sheet October 2000 File Number 4916

# Radiation Hardened, SEGR Resistant N-Channel Power MOSFETs



Intersil Star\*Power Rad Hard MOSFETs have been specifically developed for high performance applications in a commercial or

military space environment. Star\*Power MOSFETs offer the system designer both extremely low r<sub>DS(ON)</sub> and Gate Charge allowing the development of low loss Power Subsystems. Star\*Power FETs combine this electrical capability with total dose radiation hardness up to 300 krads while maintaining the guaranteed performance for Single Event Effects (SEE) which the Intersil FS families have always featured.

The Intersil portfolio of Star\*Power FETs includes a family of devices in various voltage, current and package styles. The Star\*Power family consists of Star\*Power and Star\*Power Gold products. Star\*Power FETs are optimized for total dose and r<sub>DS(ON)</sub> performance while exhibiting SEE capability at full rated voltage up to an LET of 37. Star\*Power Gold FETs have been optimized for SEE and Gate Charge providing SEE performance to 80% of the rated voltage for an LET of 82 with extremely low gate charge characteristics.

This MOSFET is an enhancement-mode silicon-gate power field effect transistor of the vertical DMOS (VDMOS) structure. It is specifically designed and processed to be radiation tolerant. The MOSFET is well suited for applications exposed to radiation environments such as switching regulation, switching converters, power distribution, motor drives and relay drivers as well as other power control and conditioning applications. As with conventional MOSFETs these Radiation Hardened MOSFETs offer ease of voltage control, fast switching speeds and ability to parallel switching devices.

Reliability screening is available as either TXV or Space equivalent of MIL-PRF-19500.

Formerly available as type TA45213W.


# **Ordering Information**

RAD LEVEL	SCREENING LEVEL	PART NUMBER/BRAND
10K	Engineering Samples	FSPJ160D1
100K	TXV	FSPJ160R3
100K	Space	FSPJ160R4
300K	TXV	FSPJ160F3
300K	Space	FSPJ160F4

#### **Features**


- 70A (Current Limited by Package), 100V, r<sub>DS(ON)</sub> = 0.011Ω
- · UIS Rated
- · Total Dose
  - Meets Pre-RAD Specifications to 100 krad (Si)
  - Rated to 300 krad (Si)
- · Single Event
  - Safe Operating Area Curve for Single Event Effects
  - SEE Immunity for LET of 36MeV/mg/cm<sup>2</sup> with V<sub>DS</sub> up to 100% of Rated Breakdown and V<sub>GS</sub> of 5V Off-Bias
- · Dose Rate
  - Typically Survives 3E9 rad (Si)/s at 80% BV<sub>DSS</sub>
  - Typically Survives 2E12 if Current Limited to I<sub>AS</sub>
- Photo Current
  - 9nA Per-rad (Si)/s Typically
- Neutron
  - Maintain Pre-RAD Specifications for 3E13 Neutrons/cm<sup>2</sup>
  - Usable to 3E14 Neutrons/cm<sup>2</sup>

## Symbol



## Packaging

TO-254AA



CAUTION: Beryllia Warning per MIL-PRF-19500 refer to package specifications.

# FSPJ160R, FSPJ160F

## **Absolute Maximum Ratings** $T_C = 25^{\circ}C$ , Unless Otherwise Specified

	FSPJ160R, FSPJ160F	UNITS
Drain to Source Voltage	100	V
Drain to Gate Voltage ( $R_{GS} = 20k\Omega$ ) $V_{DGR}$	100	V
Continuous Drain Current		
$T_C = 25^{\circ}C$	70*	Α
$T_C = 100^{\circ}C$	62	Α
Pulsed Drain Current	200	Α
Gate to Source Voltage	±30	V
Maximum Power Dissipation		
$T_C = 25^{\circ}C$ $P_T$	192	W
$T_C = 100^{\circ}C$ $P_T$	77	W
Linear Derating Factor	1.54	W/oC
Single Pulsed Avalanche Current, L = 100μH (See Test Figure)I <sub>AS</sub>	170	Α
Continuous Source Current (Body Diode)	70	Α
Pulsed Source Current (Body Diode)	200	Α
Operating and Storage Temperature	-55 to 150	οС
Lead Temperature (During Soldering)	300	°С
Weight (Typical)	9.3 (Typical)	g

CAUTION: Stresses above those listed in "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress only rating and operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied.

NOTE: Current is limited by the package capability

## **Electrical Specifications** $T_C = 25^{\circ}C$ , Unless Otherwise Specified

PARAMETER	SYMBOL	TEST CO	ONDITIONS	MIN	TYP	MAX	UNITS
Drain to Source Breakdown Voltage	BV <sub>DSS</sub>	$I_D = 1$ mA, $V_{GS} = 0$	$I_D = 1mA$ , $V_{GS} = 0V$		-	-	V
Gate Threshold Voltage	V <sub>GS(TH)</sub>	$V_{GS} = V_{DS}$	$T_{C} = -55^{\circ}C$	-	-	5.5	V
		$I_D = 1mA$	$T_C = 25^{\circ}C$	2.0	-	4.5	V
			T <sub>C</sub> = 125 <sup>o</sup> C	1.0	-	=	V
Zero Gate Voltage Drain Current	I <sub>DSS</sub>	V <sub>DS</sub> = 80V,	$T_C = 25^{\circ}C$	-	-	25	μΑ
		$V_{GS} = 0V$	T <sub>C</sub> = 125 <sup>o</sup> C	-	-	250	μА
Gate to Source Leakage Current	I <sub>GSS</sub>	$V_{GS} = \pm 30V$	$T_C = 25^{\circ}C$	-	-	100	nA
		$T_{C} = 125^{\circ}C$	$T_{C} = 125^{\circ}C$	-	-	200	nA
Drain to Source On-State Voltage	V <sub>DS(ON)</sub>	V <sub>GS</sub> = 12V, I <sub>D</sub> = 70	DA .	-	-	0.805	V
Drain to Source On Resistance	r <sub>DS(ON)12</sub>	$I_D = 62A,$ $T_C = 25^{\circ}C$ $T_C = 125^{\circ}C$	$T_{C} = 25^{\circ}C$	-	0.0095	0.011	Ω
			-	-	0.020	Ω	
Turn-On Delay Time	t <sub>d(ON)</sub>	$V_{DD} = 50V, I_D = 70A,$ $R_L = 0.71\Omega, V_{GS} = 12V,$ $R_{GS} = 2.35\Omega$		-	-	35	ns
Rise Time	t <sub>r</sub>			-	-	140	ns
Turn-Off Delay Time	t <sub>d(OFF)</sub>			-	-	60	ns
Fall Time	t <sub>f</sub>			-	-	20	ns
Total Gate Charge	Q <sub>g(12)</sub>	V <sub>GS</sub> = 0V to 12V	$50V \le V_{DD} \le 80V$ ,	-	145	175	nC
Gate Charge Source	Q <sub>gs</sub>		I <sub>D</sub> = 70A	-	35	45	nC
Gate Charge Drain	Q <sub>gd</sub>			-	45	55	nC
Gate Charge at 20V	Q <sub>g(20)</sub>	V <sub>GS</sub> = 0V to 20V		-	230	=	nC
Threshold Gate Charge	Q <sub>g(TH)</sub>	$V_{GS} = 0V \text{ to } 2V$	1	-	12	-	nC
Plateau Voltage	V <sub>(PLATEAU)</sub>	I <sub>D</sub> = 70A, V <sub>DS</sub> = 15V		-	6.5	-	V
Input Capacitance	C <sub>ISS</sub>	V <sub>DS</sub> = 25V, V <sub>GS</sub> =	0V,	-	6900	-	pF
Output Capacitance	Coss	f = 1MHz		-	1670	-	pF
Reverse Transfer Capacitance	C <sub>RSS</sub>	1		-	100	-	pF
Thermal Resistance Junction to Case	$R_{ heta JC}$			-	-	0.65	°C/W

## **Source to Drain Diode Specifications**

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNITS
Forward Voltage	V <sub>SD</sub>	I <sub>SD</sub> = 70A	-	-	1.2	V
Reverse Recovery Time	t <sub>rr</sub>	$I_{SD} = 70A$ , $dI_{SD}/dt = 100A/\mu s$	-	-	290	ns
Reverse Recovery Charge	Q <sub>RR</sub>		-	1.8	-	μC

## Electrical Specifications up to 300 krad $T_C = 25^{\circ}C$ , Unless Otherwise Specified

				MIN	MAX	MIN	MAX	
PARAMETER	PARAMETER		TEST CONDITIONS	100 krad		300 krad		UNITS
Drain to Source Breakdown Volts	(Note 3)	BV <sub>DSS</sub>	$V_{GS} = 0$ , $I_D = 1mA$	100	-	100	-	V
Gate to Source Threshold Volts	(Note 3)	V <sub>GS(TH)</sub>	$V_{GS} = V_{DS}$ , $I_D = 1mA$	2.0	4.5	1.5	4.5	V
Gate to Body Leakage	(Notes 2, 3)	I <sub>GSS</sub>	$V_{GS} = \pm 20V, V_{DS} = 0V$	-	100	-	100	nA
Zero Gate Leakage	(Note 3)	I <sub>DSS</sub>	$V_{GS} = 0, V_{DS} = 80V$	-	25	-	50	μΑ
Drain to Source On-State Volts	(Notes 1, 3)	V <sub>DS(ON)</sub>	V <sub>GS</sub> = 12V, I <sub>D</sub> = 70A	-	0.805	-	0.875	V
Drain to Source On Resistance	(Notes 1, 3)	rDS(ON)12	V <sub>GS</sub> = 12V, I <sub>D</sub> = 62A	-	0.011	-	0.012	Ω

#### NOTES:

- 1. Pulse test, 300µs Max.
- 2. Absolute value.
- 3. Insitu Gamma bias must be sampled for both  $V_{GS}$  = 12V,  $V_{DS}$  = 0V and  $V_{GS}$  = 0V,  $V_{DS}$  = 80% BV<sub>DSS</sub>.

## Single Event Effects (SEB, SEGR) Note 4

		ENVIRONME		(NOTE 7)	
TEST	SYMBOL	(NOTE 6) TYPICAL LET (MeV/mg/cm)	TYPICAL RANGE (μ)	APPLIED V <sub>GS</sub> BIAS (V)	MAXIMUM V <sub>DS</sub> BIAS (V)
Single Event Effects Safe Operating Area	SEESOA	37	36	-5	100
		60	32	-2	80
		82	28	0	60
		82	28	-2	30

### NOTES:

- 4. Testing conducted at Brookhaven National Labs or Texas A&M.
- 5. Fluence =  $1E5 \text{ ions/cm}^2$  (Typ), T =  $25^{\circ}$ C.
- 6. Ion Species: LET = 37, Br or Kr; LET = 60, I or Xe; LET = 82, Au.
- 7. Does not exhibit Single Event Burnout (SEB) or Single Event Gate Rupture (SEGR).

# Performance Curves Unless Otherwise Specified




FIGURE 1. SINGLE EVENT EFFECTS SAFE OPERATING AREA




FIGURE 2. TYPICAL SEE SIGNATURE CURVE

100

## Performance Curves Unless Otherwise Specified (Continued)




FIGURE 3. TYPICAL DRAIN INDUCTANCE REQUIRED TO LIMIT GAMMA DOT CURRENT TO IAS




FIGURE 4. MAXIMUM CONTINUOUS DRAIN CURRENT vs TEMPERATURE




FIGURE 5. FORWARD BIAS SAFE OPERATING AREA




FIGURE 6. BASIC GATE CHARGE WAVEFORM




FIGURE 7. TYPICAL NORMALIZED  $r_{DS(ON)}$  vs JUNCTION TEMPERATURE




FIGURE 8. TYPICAL OUTPUT CHARACTERISTICS

## Performance Curves Unless Otherwise Specified (Continued)

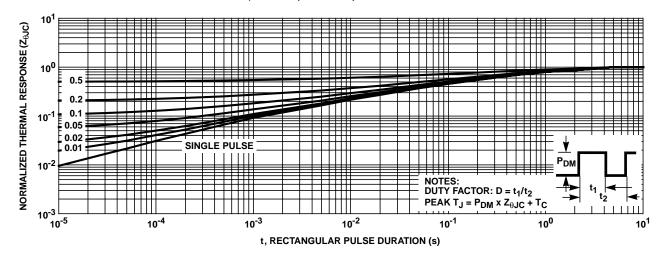


FIGURE 9. NORMALIZED MAXIMUM TRANSIENT THERMAL RESPONSE




FIGURE 10. UNCLAMPED INDUCTIVE SWITCHING

## Test Circuits and Waveforms




FIGURE 11. UNCLAMPED ENERGY TEST CIRCUIT




FIGURE 12. UNCLAMPED ENERGY WAVEFORMS

# Test Circuits and Waveforms (Continued)




FIGURE 13. RESISTIVE SWITCHING TEST CIRCUIT




FIGURE 14. RESISTIVE SWITCHING WAVEFORMS

# Screening Information

Screening is performed in accordance with the latest revision in effect of MIL-PRF-19500, (Screening Information Table).

## Delta Tests and Limits (JANTXV Equivalent, JANS Equivalent) T<sub>C</sub> = 25°C, Unless Otherwise Specified

PARAMETER	SYMBOL	TEST CONDITIONS	MAX	UNITS
Gate to Source Leakage Current	I <sub>GSS</sub>	$V_{GS} = \pm 30V$	±20 (Note 7)	nA
Zero Gate Voltage Drain Current	I <sub>DSS</sub>	V <sub>DS</sub> = 80% Rated Value	±25 (Note 7)	μΑ
Drain to Source On Resistance	r <sub>DS(ON)</sub>	T <sub>C</sub> = 25 <sup>o</sup> C at Rated I <sub>D</sub>	±20% (Note 8)	Ω
Gate Threshold Voltage	V <sub>GS(TH)</sub>	$I_D = 1.0 \text{mA}$	±20% (Note 8)	V

#### NOTES:

- 8. Or 100% of Initial Reading (whichever is greater).
- 9. Of Initial Reading.

## **Screening Information**

TEST	JANTXV EQUIVALENT	JANS EQUIVALENT
Unclamped Inductive Switching	V <sub>GS(PEAK)</sub> = 20V, L = 0.1mH; Limit = 170A	V <sub>GS(PEAK)</sub> = 20V, L = 0.1mH; Limit = 170A
Thermal Response	t <sub>H</sub> = 100ms; V <sub>H</sub> = 25V; I <sub>H</sub> = 4A; LIMIT = 100mV	t <sub>H</sub> = 100ms; V <sub>H</sub> = 25V; I <sub>H</sub> = 4A; LIMIT = 100mV
Gate Stress	V <sub>GS</sub> = 45V, t = 250μs	V <sub>GS</sub> = 45V, t = 250μs
Pind	Optional	Required
Pre Burn-In Tests (Note 9)	MIL-PRF-19500 Group A, Subgroup 2 (All Static Tests at 25°C)	MIL-PRF-19500 Group A, Subgroup 2 (All Static Tests at 25°C)
Steady State Gate Bias (Gate Stress)	MIL-PRF-750, Method 1042, Condition B $V_{GS} = 80\%$ of Rated Value, $T_A = 150^{\circ}$ C, Time = 48 hours	MIL-PRF-750, Method 1042, Condition B $V_{GS} = 80\%$ of Rated Value, $T_A = 150^{\circ}$ C, Time = 48 hours
Interim Electrical Tests (Note 9)	All Delta Parameters Listed in the Delta Tests and Limits Table	All Delta Parameters Listed in the Delta Tests and Limits Table
Steady State Reverse Bias (Drain Stress)	MIL-PRF-750, Method 1042, Condition A $V_{DS} = 80\%$ of Rated Value, $T_A = 150^{O}$ C, Time = 160 hours	MIL-PRF-750, Method 1042, Condition A $V_{DS}$ = 80% of Rated Value, $T_A$ = 150°C, Time = 240 hours
PDA	10%	5%
Final Electrical Tests (Note 9)	MIL-PRF-19500, Group A, Subgroup 2	MIL-PRF-19500, Group A, Subgroups 2 and 3

#### NOTE:

10. Test limits are identical pre and post burn-in.

### **Additional Tests**

PARAMETER	SYMBOL	TEST CONDITIONS	MAX	UNITS
Safe Operating Area	SOA	$V_{DS} = 80V, t = 10ms$	3.75	A
Thermal Impedance	ΔV <sub>SD</sub>	$t_H = 500ms; V_H = 25V; I_H = 4A$	200	mV

## Rad Hard Data Packages - Intersil Power Transistors

### TXV Equivalent

# 1. RAD HARD TXV EQUIVALENT - STANDARD DATA PACKAGE

- A. Certificate of Compliance
- B. Assembly Flow Chart
- C. Preconditioning Attributes Data Sheet
   D. Group A Attributes Data Sheet
   E. Group B Attributes Data Sheet
   F. Group C Attributes Data Sheet
   G. Group D Attributes Data Sheet

# 2. RAD HARD TXV EQUIVALENT - OPTIONAL DATA PACKAGE

- A. Certificate of Compliance
- B. Assembly Flow Chart
- C. Preconditioning Attributes Data Sheet
  - Pre and Post Burn-In Read and Record

Data

- D. Group A Attributes Data Sheet
- E. Group B Attributes Data Sheet
  - Pre and Post Read and Record Data for Intermittent Operating Life (Subgroup B3)
     Bond Strength Data (Subgroup B3)
     Pre and Post High Temperature Operating Life Read and Record Data (Subgroup B6)
- F. Group C Attributes Data Sheet
  - Pre and Post Read and Record Data for Intermittent Operating Life (Subgroup C6)
  - Bond Strength Data (Subgroup C6)
- G. Group D Attributes Data Sheet
  - Pre and Post RAD Read and Record Data

### Class S - Equivalents

# 1. RAD HARD "S" EQUIVALENT - STANDARD DATA PACKAGE


- A. Certificate of Compliance
- B. Serialization Records
- C. Assembly Flow Chart
- D. SEM Photos and Report
- E. Preconditioning Attributes Data Sheet
  - HTRB Hi Temp Gate Stress Post Reverse Bias Data and Delta Data
     HTRB - Hi Temp Drain Stress Post
  - Reverse Bias Delta Data
- F. Group A Attributes Data Sheet
   G. Group B Attributes Data Sheet
   H. Group C Attributes Data Sheet
   I. Group D Attributes Data Sheet

# 2. RAD HARD MAX. "S" EQUIVALENT - OPTIONAL DATA PACKAGE

- A. Certificate of Compliance
- B. Serialization Records
- C. Assembly Flow Chart
- D. SEM Photos and Report
- E. Preconditioning Attributes Data Sheet
  - HTRB Hi Temp Gate Stress Post
  - Reverse Bias Data and Delta Data HTRB Hi Temp Drain Stress Post
  - Reverse Bias Delta Data X-Ray and X-Ray Report
- F. Group A Attributes Data Sheet
  - Subgroups A2, A3, A4, A5 and A7 Data
- G. Group B Attributes Data Sheet
  - Subgroups B1, B3, B4, B5 and B6 Data
- H. Group C Attributes Data Sheet
  - Subgroups C1, C2, C3 and C6 Data
- I. Group D Attributes Data Sheet
  - Pre and Post Radiation Data

#### TO-254AA

#### 3 LEAD JEDEC TO-254AA HERMETIC METAL PACKAGE

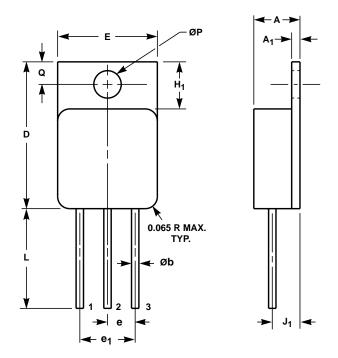

	INCHES		MILLIM	MILLIMETERS		
SYMBOL	MIN	MAX	MIN	MAX	NOTES	
Α	0.249	0.260	6.33	6.60	-	
A <sub>1</sub>	0.040	0.050	1.02	1.27	-	
Øb	0.035	0.045	0.89	1.14	2, 3	
D	0.790	0.800	20.07	20.32	-	
Е	0.535	0.545	13.59	13.84	-	
е	0.150	TYP	3.81 TYP		4	
e <sub>1</sub>	0.300	BSC	7.62 BSC		4	
H <sub>1</sub>	0.245	0.265	6.23	6.73	-	
J <sub>1</sub>	0.140	0.160	3.56	4.06	4	
L	0.520	0.560	13.21	14.22	-	
ØP	0.139	0.149	3.54	3.78	-	
Q	0.110	0.130	2.80	3.30	-	

#### NOTES:

- These dimensions are within allowable dimensions of Rev. A of JEDEC outline TO-254AA dated 11-86.
- 2. Add typically 0.002 inches (0.05mm) for solder coating.
- 3. Lead dimension (without solder).
- 4. Position of lead to be measured 0.250 inches (6.35mm) from bottom of dimension D.
- 5. Die to base BeO isolated, terminals to case ceramic isolated.
- 6. Controlling dimension: Inch.
- 7. Revision 1 dated 1-93.

# **WARNING!**

#### **BERYLLIA WARNING PER MIL-PRF-19500**

Packages containing beryllium oxide (BeO) shall not be ground, machined, sandblasted, or subject to any mechanical operation which will produce dust containing any beryllium compound. Packages containing any beryllium compound shall not be subjected to any chemical process (etching, etc.) which will produce fumes containing beryllium or its' compounds.

All Intersil semiconductor products are manufactured, assembled and tested under ISO9000 quality systems certification.

Intersil semiconductor products are sold by description only. Intersil Corporation reserves the right to make changes in circuit design and/or specifications at any time without notice. Accordingly, the reader is cautioned to verify that data sheets are current before placing orders. Information furnished by Intersil is believed to be accurate and reliable. However, no responsibility is assumed by Intersil or its subsidiaries for its use; nor for any infringements of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Intersil or its subsidiaries.

For information regarding Intersil Corporation and its products, see web site www.intersil.com

### Sales Office Headquarters

**NORTH AMERICA** 

Intersil Corporation P. O. Box 883, Mail Stop 53-204 Melbourne, FL 32902

TEL: (321) 724-7000 FAX: (321) 724-7240 EUROPE

Intersil SA Mercure Center 100, Rue de la Fusee 1130 Brussels, Belgium

TEL: (32) 2.724.2111 FAX: (32) 2.724.22.05

ASIA

Intersil Ltd. 8F-2, 96, Sec. 1, Chien-kuo North, Taipei, Taiwan 104

Republic of China TEL: 886-2-2515-8508 FAX: 886-2-2515-8369