





April 2010



- Pletronics' LV99D Series is a quartz crystal controlled precision square wave generator with an LVDS output.
- The package is designed for high density surface mount designs.
- · Low cost mass produced oscillator.
- Tape and Reel or cut tape packaging is available.
- 5 x 7 mm LCC Ceramic Package
- Enable/Disable Function on pad 1
- Output frequency is synthesized.
- Low Jitter

## Pletronics Inc. certifies this device is in accordance with the RoHS 6/6 (2002/95/EC) and WEEE (2002/96/EC) directives.

Pletronics Inc. guarantees the device does not contain the following: Cadmium, Hexavalent Chromium, Lead, Mercury, PBB's, PBDE's

Weight of the Device: 0.16 grams

Moisture Sensitivity Level: 1 As defined in J-STD-020C

Second Level Interconnect code: e4

### **Absolute Maximum Ratings:**

Parameter	Unit						
V <sub>cc</sub> Supply Voltage	-0.5V to +5.0V						
Vi Input Voltage	-0.5V to V <sub>CC</sub> + 0.5V						
Vo Output Voltage	-0.5V to V <sub>CC</sub> + 0.5V						

#### **Thermal Characteristics**

The maximum die or junction temperature is 155°C

The thermal resistance junction to board is 30 to 50°C/Watt depending on the solder pads, ground plane and construction of the PCB.



April 2010

#### **Part Number:**

LV99	45	D	E	٧	-375.0M	-XX	
							Packaging code or blank T250 = 250 per Tape and Reel T500 = 500 per Tape and Reel T1K = 1000 per Tape and Reel
							Frequency in MHz
							Supply Voltage V <sub>CC</sub> V = 3.3V <u>+</u> 10%
							Temperature Range blank = -10 to +70°C C = -40 to +70°C E = -40 to +85°C
							Series Model
							Frequency Stability 45 = ± 50 ppm 44 = ± 25 ppm 20 = ± 20 ppm
							Series Model

**Part Marking:** 

PLE LV99 Marking Legend:

FF.FFF M PLE = Pletronics

• YMDXX FF.FFF M = Frequency in MHZ

YMD = Date of Manufacture (year-month-day)
All other marking is internal factory codes

## **Codes for Date Code YMD**

Code	0	1	2	3	4	Code	Α	В	С	D	E	F	G	Н	J	K	L	M
Year	2010	2011	2012	2013	2014	Month	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DEC
	Code		1	2	3	4	5	6	7	8	9	Α	В	С	D	Ε	F	G
	Day		1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
	Code		Н	J	K	L	М	N	Р	R	Т	U	٧	W	X	Υ	Z	
	Day		17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	



April 2010

## Electrical Specification for 3.30V $\pm 10\%$ over the specified temperature range and the frequency range of 10.9 MHz to 670 MHz


Item	Min	Max	Unit	Condition		
Frequency Accuracy "45"	-50	+50	ppm	For all supply voltages, load changes, aging for		
"44"	-25	+25		year, shock, vibration and temperatures		
"20"	-20	+20				
Output Waveform		LVDS				
Output High Level		1.60	Volts			
Output Low Level	0.90		Volts	See load circuit		
Differential Output (V <sub>OD</sub> )	250	450	mVolts			
Output Offset Voltage (Vos)	1.125	1.375	Volts	R1 = 50 ohms		
Differential Output Error (dVos)		50	mVolts			
Output Symmetry	47	53	%	Referenced to 50% of amplitude or crossing point		
Output T <sub>RISE</sub> and T <sub>FALL</sub>	150	230	pS	Vth is 20% and 80% of waveform		
Jitter	-	0.6	pS RMS	Measured from 12KHz to 20MHz from Fnominal		
	-	2.8		Measured from 10Hz to 20MHz from Fnominal		
Output Short Circuit Current	-	-20	mA	Vout = 0.0V		
Vcc Supply Current	-	80	mA			
Enable/Disable Internal Pull-up	50	-	Kohm	To Vcc (equivalent resistance)		
V disable	-	0.8	Volts	Referenced to Ground		
V enable	2.0	-	Volts	Referenced to Ground		
Output leakage V <sub>OUT</sub> = V <sub>CC</sub>	-20	+20	uA	Pad 1 low, device disabled		
$V_{OUT} = 0V$	-20	+20	uA			
Enable	-	10	nS	Time for output to reach a logic state		
Disable time	-	10	nS	Time for output to reach a high Z state		
Start up time	-	5	mS	Measured from the time Vcc = 3.0V		
Operating Temperature Range	-10	+70	°C	Standard Temperature Range		
	-20	+70	°C	Extended Temperature Range "C" Option		
	-40	+85	°C	Extended Temperature Range "E" Option		
Storage Temperature Range	-55	+125	°C			

Specifications with Pad 1 E/D open circuit




April 2010


## **Typical Phase-Noise Response**

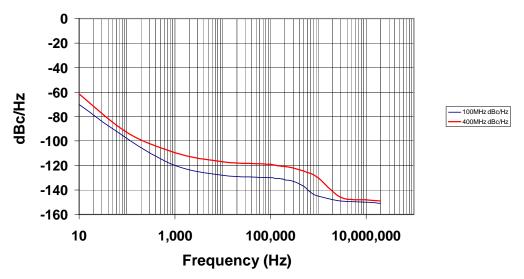

#### **Load Circuit**



#### **Test Waveform**





April 2010

### Reliability: Environmental Compliance

Parameter	Condition
Mechanical Shock	MIL-STD-883 Method 2002, Condition B
Vibration	MIL-STD-883 Method 2007, Condition A
Solderability	MIL-STD-883 Method 2003
Thermal Shock	MIL-STD-883 Method 1011, Condition A

## **ESD Rating**

Model	Minimum Voltage	Conditions		
Human Body Model	2000	MIL-STD-883 Method 3115		
Charged Device Model	1500	JESD 22-C101		

#### Package Labeling

Label is 1" x 2.6" (25.4mm x 66.7mm) Font is Courier New Bar code is 39-Full ASCII

P/N: LV9920DV-312.50M PRITONIS

Customer P/N: L2345678

Qty: D/C TAA-BT

Label is 1" x 2.6" (25.4mm x 66.7mm) Font is Arial

**RoHS Compliant** 

2nd LvL Interconnect


Category=e4

Max Safe Temp=260C for 10s 2X Max



April 2010

## Mechanical:

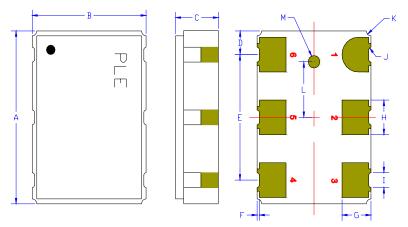

Contacts:

Gold 11.8 to 39.4  $\mu inches$  (0.3 to 1.0  $\mu m)$  over

Nickel 50 to 350  $\mu$ inches (1.27 to 8.89  $\mu$ m)

Center metalized pad "M" on the base is not internally connected.

<sup>1</sup> Typical dimensions

Not to Scale


	Inches	mm
А	0.276 <u>+</u> 0.006	7.00 <u>+</u> 0.15
В	0.197 <u>+</u> 0.006	5.00 <u>+</u> 0.15
С	0.067 max	1.70 max
D <sup>1</sup>	0.038	0.96
E <sup>1</sup>	0.200	5.08
F <sup>1</sup>	0.004	0.10
G¹	0.050	1.27
H <sup>1</sup>	0.055	1.40
l <sup>1</sup>	0.024	0.60
J <sup>1</sup>	0.004r	0.10r
K <sup>1</sup>	0.008r	0.20r
L <sup>1</sup>	0.089	2.25
M <sup>1</sup>	0.010r	0.25r

Pad	Function	Note
1	Output Enable/Disable	When this pad is not connected the oscillator shall operate. If <0.80 volts, the output will be inhibited (high impedance state.) Recommend connecting this pad to $V_{\rm CC}$ if the oscillator is to be always on.
2	No connect	This pad should be connected to Ground or Supply Voltage to lower the packages thermal resistance.
3	Ground (GND)	
4	Output	The outputs must be terminated, 100 ohms between the outputs is the ideal
5	Output*	termination. Capacitor coupled terminations can be used.
6	Supply Voltage (V <sub>cc</sub> )	Recommend connecting appropriate power supply bypass capacitors as close as possible.



April 2010

## Reflow Cycle (typical for lead free processing)

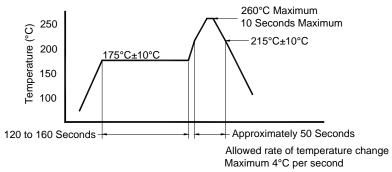

The part may be reflowed 3 times without degradation.

### Tape and Reel: available for quantities of 250 to 1000 per reel, cut tape for < 250


Constant Dimensions Table 1									
Tape Size	D0	D1 Min	E1	P0	P2	S1 Min	T Max	T1 Max	
8mm		1.0			2.0				
12mm	1.5	1.5	1.75	4.0	<u>+</u> 0.05				
16mm	+0.1 -0.0	1.5	<u>+</u> 0.1	<u>+</u> 0.1	2.0	0.6	0.6	0.1	
24mm		1.5			<u>+</u> 0.1				


	Variable Dimensions Table 2									
Tape Size	B1 Max	E2 Min	F	P1	T2 Max	W Max	Ao, Bo & Ko			
16 mm	12.1	14.25	7.5 <u>+</u> 0.1	8.0 <u>+</u> 0.1	8.0	16.3	Note 1			

Note 1: Embossed cavity to conform to EIA-481-B

Dimensions in mm

Not to scale



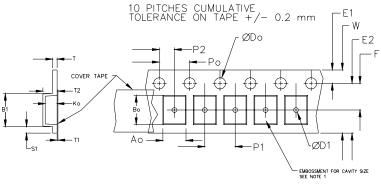

		REE	REEL DIMENSIONS						
Α	inches	7.0	10.0	13.0					
	mm	177.8	254.0	330.2					
В	inches	2.50	4.00	3.75					
	mm	63.5	101.6	95.3	Tape Width				
С	mm	13	13.0 +0.5 / -0.2						
D	mm	16.4 +2.0 -0.0	16.4 +2.0 -0.0	16.4 +2.0 -0.0	16.0				
Re	el dimen	sions ma	y vary fro	om the ab	ove				

USER DIRECTION OF UNREELING ────



April 2010

#### IMPORTANT NOTICE

Pletronics Incorporated (PLE) reserves the right to make corrections, improvements, modifications and other changes to this product at anytime. PLE reserves the right to discontinue any product or service without notice. Customers are responsible for obtaining the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to PLE's terms and conditions of sale supplied at the time of order acknowledgment.

PLE warrants performance of this product to the specifications applicable at the time of sale in accordance with PLE's limited warranty. Testing and other quality control techniques are used to the extent PLE deems necessary to support this warranty. Except where mandated by specific contractual documents, testing of all parameters of each product is not necessarily performed.

PLE assumes no liability for application assistance or customer product design. Customers are responsible for their products and applications using PLE components. To minimize the risks associated with the customer products and applications, customers should provide adequate design and operating safeguards.

PLE products are not designed, intended, authorized or warranted to be suitable for use in life support applications, devices or systems or other critical applications that may involve potential risks of death, personal injury or severe property or environmental damage. Inclusion of PLE products in such applications is understood to be fully at the risk of the customer. Use of PLE products in such applications requires the written approval of an appropriate PLE officer. Questions concerning potential risk applications should be directed to PLE.

PLE does not warrant or represent that any license, either express or implied, is granted under any PLE patent right, copyright, artwork or other intellectual property right relating to any combination, machine or process which PLE product or services are used. Information published by PLE regarding third-party products or services does not constitute a license from PLE to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from PLE under the patents or other intellectual property of PLE.

Reproduction of information in PLE data sheets or web site is permissible only if the reproduction is without alteration and is accompanied by associated warranties, conditions, limitations and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. PLE is not responsible or liable for such altered documents.

Resale of PLE products or services with statements different from or beyond the parameters stated by PLE for that product or service voids all express and implied warranties for the associated PLE product or service and is an unfair or deceptive business practice. PLE is not responsible for any such statements.

#### **Contacting Pletronics Inc.**

Pletronics Inc. Tel: 425-776-1880 19013 36<sup>th</sup> Ave. West Fax: 425-776-2760

Lynnwood, WA 98036-5761 USA E-mail: ple-sales@pletronics.com

URL: www.pletronics.com

Copyright © 2007, 2010, Pletronics Inc.