

# Distinctive Characteristics

For high frequency (DC through 1GHz): Isolation 40dB minimum at 1GHz. Insertion loss 0.5dB maximum at 1GHz.

Impedance 75 ohms

Innovative alternative to relay products

Highly reliable, self-cleaning twin contact mechanism with gold plating

Long total travel of .138" (3.5mm) for highly visible actuator position

Distinct audible and tactile feedback during actuation

Suited to high frequency applications (90MHz to 1GHz) such as CATV and communication equipment

Actual Size with Tall Actuator



# General Specifications

**Electrical Capacity (Resistive Load)** 

Logic Level: 0.4VA maximum @ 28V AC/DC maximum

(Applicable Range 0.1mA ~ 0.1A @ 20mV ~ 28V)

Note: Find additional explanation of operating range in Supplement section.

**RF Ratings** 

75 ohms Impedance:

Insertion Loss: 0.5dB maximum @ 1GHz **Isolation:** 40dB minimum @ 1GHz

Other Ratings

**Contact Resistance:** 200 milliohms maximum

250 megohms minimum @ 500V DC **Insulation Resistance:** Dielectric Strength: 500V AC minimum for 1 minute minimum

Mechanical Life: 1,000 operations minimum Electrical Life: 1,000 operations minimum **Contact Timina:** Nonshorting (break-before-make)

**Total Travel:** .138" (3.5mm)

**Environmental Data** 

-30°C through +85°C (-22°F through +185°F) **Operating Temp Range:** 

90 ~ 95% humidity for 240 hours @ 40°C (104°F) **Humidity:** 

10 ~ 55Hz with peak-to-peak amplitude of 1.5mm traversing the frequency range Vibration:

& returning in 5 minutes; 3 right angled directions for 2 hours

Shock: 50G (490m/s²) acceleration (tested in 6 right angled directions, with 5 shocks in each direction)

Installation


**Soldering Time & Temp:** Wave Soldering: See Profile A in Supplement section.

Manual Soldering: See Profile A in Supplement section.

These devices are not process sealed. Hand clean locally using alcohol based solution. Cleaning:




## TYPICAL SWITCH ORDERING EXAMPLE

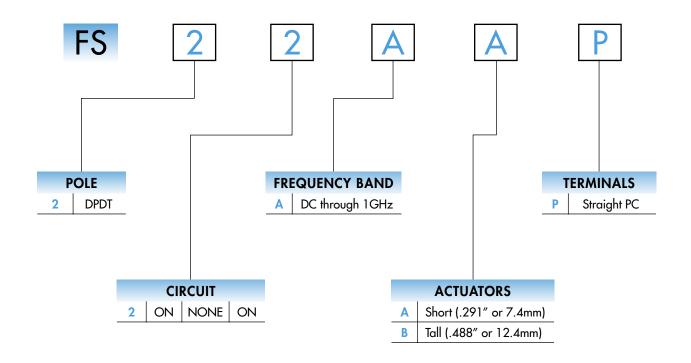

#### **DESCRIPTION FOR TYPICAL ORDERING EXAMPLE**

FS22AAP




POLE & CIRCUIT								
		Slide Position			Connected Terminals			Throw & Schematics
Pole	Model	Left	Center	Right	Left	Center	Right	Note: Terminal numbers are not actually on the switch.
DP	F\$22	ON	NONE	ON	2-1 5-4	NA	2-3 5-6	DPDT 2 (COM) 5 • 6




### HIGH FREQUENCY PERFORMANCE

# Option 1 Direction of Actuation Out = Circuit Trace

#### **RF Connection Options**





A = Amplifier or other device

#### Isolation


>40dB @ 1GHz (higher value is better)

#### **Insertion Loss**


<0.5dB @ 1GHz (lower value is better)

#### **Standing Wave Ration** or Impedance Matching

Standing Wave = ratio between highest voltage & lowest voltage (must always be more than 1)










Note: The data above reflects the conditions using the FS switch on a test PCB with two coaxial connectors. High frequency applications require external connection on the PCB. Contact factory for details.


### TYPICAL SWITCH DIMENSIONS

#### **Short & Tall Actuators**









FS22ABP

Actuator in LEFT position.