

RLT1050M-500G

TECHNICAL DATA

High Power Infrared Laser Diode

Features

- Lasing Mode Structure: multi mode
- Peak Wavelength : typ. 1050 nm
- Optical Ouput Power: 500 mW
- Package: 9 mm

Electrical Connection



ΔΤ

ENTION

	Bottom View			
1 ₀	0 ³	n-type		2
\cdot	$\overline{\nabla}$	PIN	Function	
		1	LD Cathode	$\rightarrow \oplus + \oplus \rightarrow$
		2	LD Anode, PD Cathode	
	Į	3	PD Anode	
C	2		·	

Absolute Maximum Ratings (T_c=25°C)

Item	Symbol	Value	Unit
CW Output Power	Po	550	mW
LD Reverse Voltage	V _{R(LD)}	1.5	V
PD Reverse Voltage	V _{R(PD)}	10	V
Operating Case Temperature	T _c	-20 +35	°C
Storage Temperature	T _{stg}	-40 +70	°C


Specifications (T_c=25°C)

Item	Symbol	Min.	Тур.	Max.	Unit			
Optical Specification								
CW Output Power	Po	-	500	-	mW			
Peak Wavelength	λ_{P}	-	1050	-	nm			
Spectral Width (FWHM)	Δλ	1.6	1.7	1.8	nm			
FWHM Beam Divergence	θμ	-	10	-	deg			
F WHIM Beam Divergence	θ⊥	-	30	-	deg			
Emitting Aperature	WxH		100 x 1		μm			
Electrical Specification								
Threshold Current	I _{th}	200	280	350	mA			
Operating Current	I _{op}	860	890	910	A			
Operating Voltage	U _{op}	-	1.7	1.8	V			
Monitor Current	l _m	100	500	1500	μA			
Operating Voltage	U _{op}	-	1.9	-	V			

The above specifications are for reference purpose only and subjected to change without prior notice.



Package Dimensons

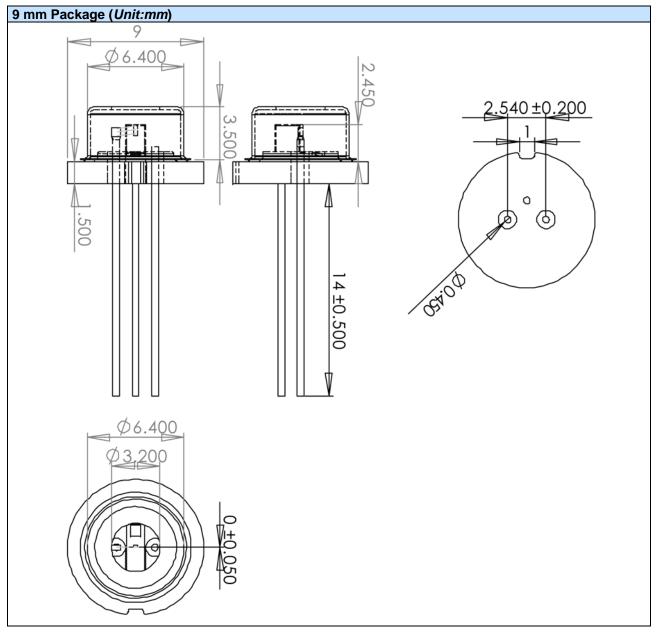



Safety of Laser light

 Laser Light can damage the human eyes and skin. Do not expose the eye or skin directly to any laser light and/or through optical lens. When handling the LDs, wear appropriate safety glasses to prevent laser light, even any reflections from entering to the eye. Focused laser beam through optical instruments will increase the chance of eye hazard.



• Warning: Laser diode is emitting invisible light

Cautions

1. Operating methode

- This LD shall change its forward voltage requirement and optical ouput power according to temperature change. Also, the LD will require more operation current to maintain same ouput power as it degrades.
- Confirm that electrical spike current generated by switching on and off does not exceed the maximum operating current level specified herein above as absolute maximum rating. Also, employ appropriat countermeasures to reduce chattering and/or overshooting in the circuit.

2. Static Electricity

• Static electricity or electrical surges will reduce and degrade the reliability of the LDs. It is recommended to use a wrist trap or anti-electrostatic glove when handeling the product.

3. Absolute Maximum Rating

• Active layer of LDs shall have high current density and generate high electric field during its operation. In order to prevent excessive damage, the LD must be operated strictly below absolute maximum rating.

