# SPECIFICATION FOR LCD MODULE

Model No. TM12864LBC6

3.0

Date:
Date:
Date:
Date:

TIANMA MICROELECTRONICS CO., LED


#### **REVISION RECORD**


Date	Ref. Page	Revision No.	<b>Revision Items</b>	Check & Approval


# 1. General Specifications:

1.1 Display type:	STN
1.2 Display color* <sup>1</sup> :	
Display color:	Blue-Black
Background:	Yellow-Green
1.3 Polarizer mode:	Transflective/Positive
1.4 Viewing Angle:	6:00
1.5 Driving Method:	1/64 Duty 1/9 Bias
1.6 VDD:	5.0V
1.7 LCD Operating Vo	oltage:11.0V
1.8 Backlight:	LED
1.9 Controller:	S6B0108A01-C0CX(KS0108BPCC)
1.10 Data Transfer:	8 Bit Parallel
1.11 Operating Tempe	rature: 0+50 ℃
Storage Temperatur	re: -20+60 °C
1.12 Outline Dimensio	ons: Refer to outline drawing on next page
1.13 Dot Matrix:	128 X 64 Dots
1.14 Dot Size:	0.48 X 0.48(mm)
1.15 Dot Pitch:	0.52 X 0.52(mm)
1.16 Weight:	105g


\*<sup>1</sup> Color tone is slightly changed by temperature and driving voltage.

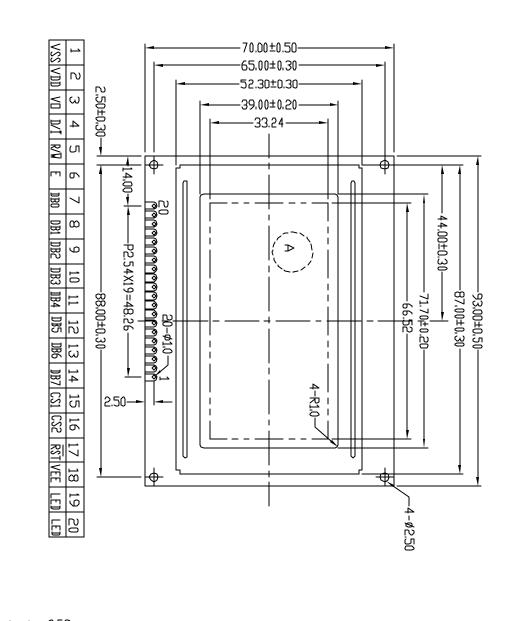

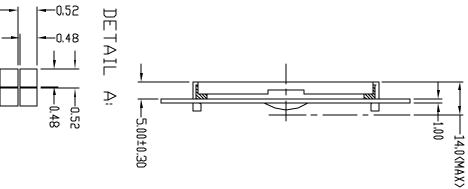

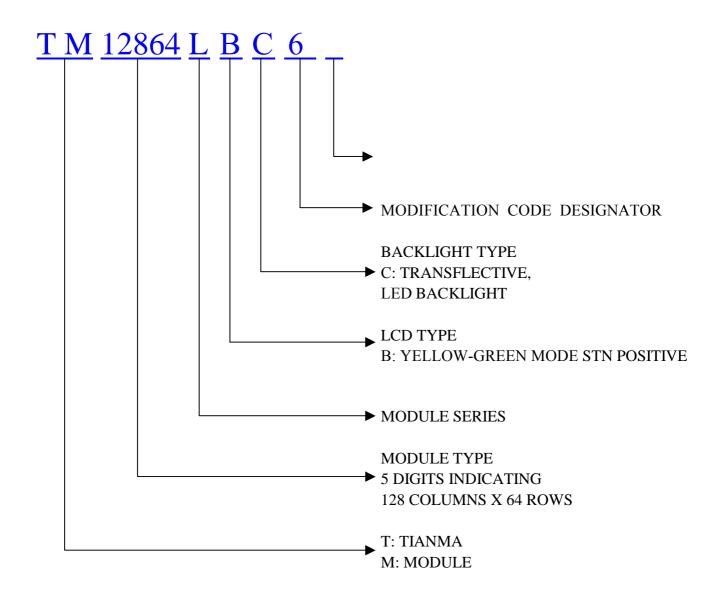

### 4. Circuit Block Diagram

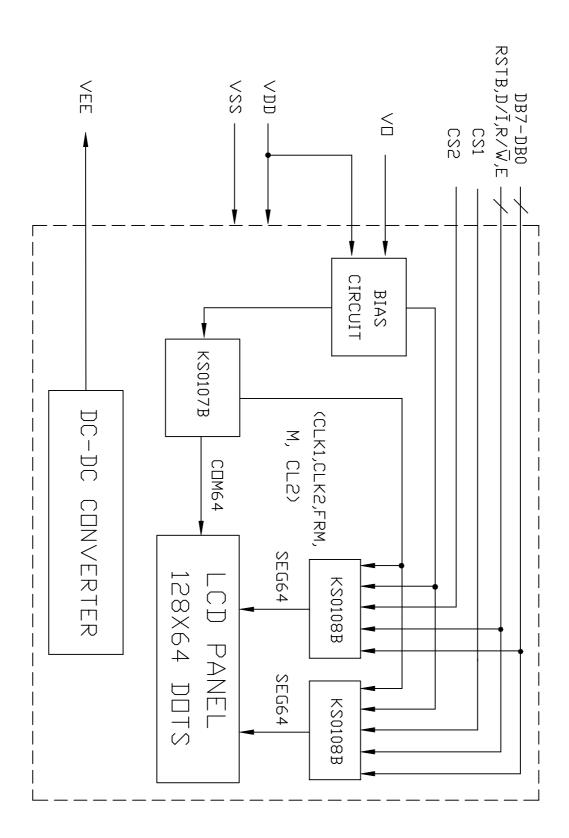

# 5. Absolute Maximum Ratings

Item	Symbol	Min.	Max.	Unit	Remark
Power Supply Voltage	Vdd-Vss	-0.3	6.0	V	
LCD Driving Voltage	VLCD	-	25.0	v	
Operating Temperature Range	Тор	0	+50	°C	No
Storage Temperature Range	Тѕт	-20	+60		Condensation

## 6. Electrical Specifications and Instruction Code

6.1 Electrical characteristics

Iten	n	Symbol	Min.	Тур.	Max.	Unit
Supply Voltage (Logic)		Vdd-Vss	4.75	5.0	5.25	V
Supply Voltage (LCD Drive)		Vdd-Vo	- 11.0		-	V
Input	High	$V_{\text{IH}}$ ( $V_{\text{DD}}$ =5.0)	$0.8V_{DD}$	-	V <sub>DD</sub> +0.3	V
Signal Voltage	Low	V <sub>IL</sub> (V <sub>DD</sub> =5.0)	0	-	0.2 V <sub>DD</sub>	V
Supply c (Log		I <sub>DD</sub>	-	2.5	-	mA
Supply current (LCD Drive)		$I_{\rm ee}$	-	1.2	-	mA
Supply current (LED)		ILED	-	-	150	mA

# 6.2 Interface Signals

Pin No.	Symbol	Level	Description
1	Vss	<b>0</b> V	Ground
2	VDD	<b>5.0V</b>	Supply voltage for logic and LCD(+)
3	Vo	-	<b>Operating voltage for LCD(-)(variable)</b>
4	D/Ī	H/L	H:Data;L:Instruction code
5	R/W	H/L	Selects read or write
6	E	H/L	Enable Input
7	DB0	H/L	Data bit0
8	DB1	H/L	Data bit1
9	DB2	H/L	Data bit2
10	DB3	H/L	Data bit3
11	DB4	H/L	Data bit4
12	DB5	H/L	Data bit5
13	DB6	H/L	Data bit6
14	DB7	H/L	Data bit7
15	CS1	L	Chip Select Signal 1
16	CS2	L	Chip Select Signal 2
17	RST	L	Reset Signal
18	VEE	-	Negative Voltage for LCD driving
19	LED1	-	Power supply for LED Backlight
20	LED2	-	Power supply for LED Backlight

# 6.3 Interface Timing Chart

#### MPU Interface

Characteristic	Symbol	Min	Тур	Max	Unit
E Cycle	tc	1000	-	-	ns
E High Level Width	t <sub>WH</sub>	450	-	-	ns
E Low Level Width	t <sub>WL</sub>	450	-	-	ns
E Rise Time	t <sub>R</sub>	-	-	25	ns
E Fall Time	t <sub>F</sub>	-	-	25	ns
Address Set-Up Time	t <sub>ASU</sub>	140	-	-	ns
Address Hold Time	t <sub>AH</sub>	10	-	-	ns
Data Set-Up Time	t <sub>DSU</sub>	200	-	-	ns
Data Delay Time	t <sub>D</sub>	-	-	320	ns
Data Hold Time (Write)	t <sub>DHW</sub>	10	-	-	ns
Data Hold Time (Read)	t <sub>DHR</sub>	20	-	-	ns

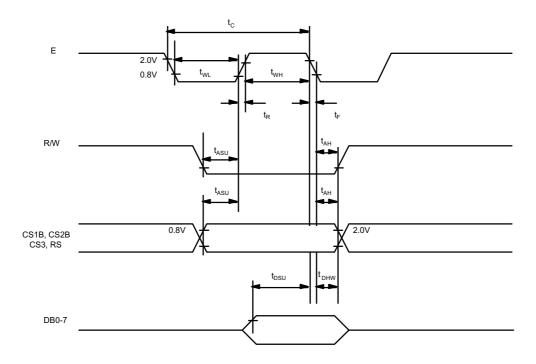


Fig 1. MPU write timing

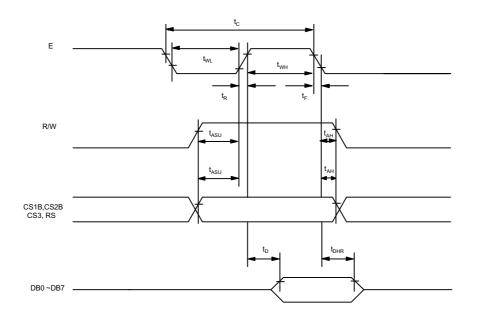


Fig 2. MPU Read timing

#### 6.4 Instruction Code

The display control instructions control the internal state of the KS0108B. Instruction is received from MPU to KS0108B for the
display control. The following table shows various instructions.


Instruction	RS	R/W	DB7	DB6	DB5	DB4	DB3	DB2	DB1	DB0	Function
Display ON/OFF	L	L	L	L	Η	Η	H	Η	Η	L/H	Controls the display on or off. Internal status and display RAM data is not affected. L:OFF, H:ON
Set Address (Y address)	L	L	L	Н		Ya	ddress	(0~63)			Sets the Y address in the Y address counter.
Set Page ( X address)	L	L	Н	L	Н	Н	Н		Page (0~7)		Sets the X address at the X address register.
Display Start Line (Z address)	L	L	Н	Н		I		start line 63)	9		Indicates the display data RAM displayed at the top of the screen.
Status Read	L	Н	B U S Y	L	0 N / 0 F F	R E S E T	L	L	L	L	Read status. BUSY L: Ready H: In operation ON/OFF L: Display ON H: Display OFF RESET L: Normal H: Reset
Write Display Data	Н	L		Write Data							Writes data (DB0:7) into display data RAM. After writing instruction, Y address is increased by 1 automatically.
Read Display Data	Н	Н				Read D	oata				Reads data (DB0:7) from display data RAM to the data bus.

#### 7. Optical Characteristics

7.1 Optical Characteristics

Ta=25℃ Condition Min. Item Symbol Тур. Max. Unit  $\theta_{\rm V}=0^{\circ}$  $\theta_{\!X}$ -30 20 ---Viewing Angle  $Cr \ge 2$ Deg  $\theta_x = 0^{\circ}$ θy -30 30 --- $\theta_x = 0^{\circ}$ **Contrast Ratio** Cr 3.0 \_ - $\theta_{y}=0^{\circ}$ Turn Ton 300 -on  $\theta_x = 0^{\circ}$ Response ms  $\theta_y = 0^{\circ}$ Time Turn Toff 300 -off

#### 7.2 Definition of Optical Characteristics

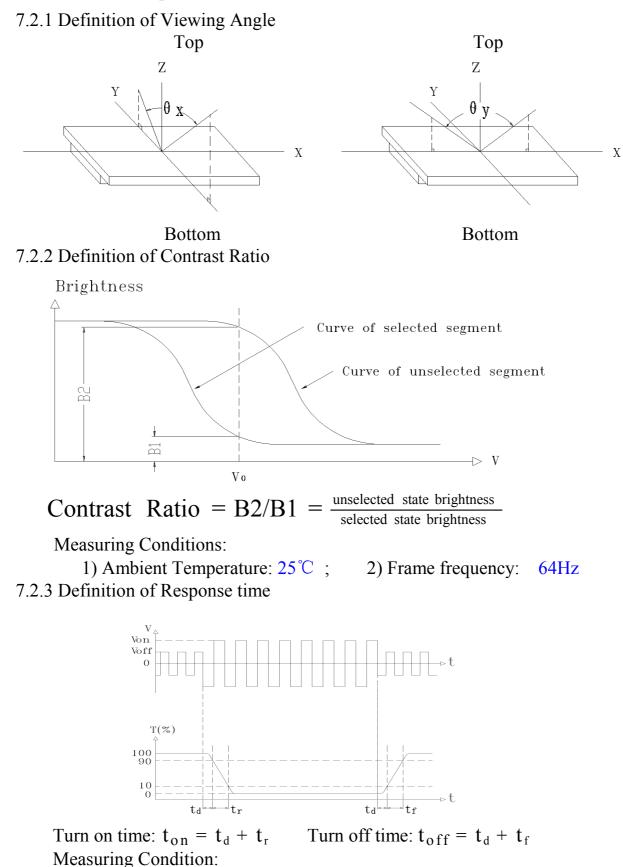

1) Operating Voltage: 11.0V 2) Frame frequency: 64Hz

# 8. Reliability

8.1 0	Content of Reliability	Ta=25°C	
No.	Test Item	Content of Test	Test condition
1	High Temperature Storage	Endurance test applying the high storage temperature for a long time	60℃ 240H
2	Low Temperature Storage	Endurance test applying the low storage temperature for a long time	-20°С 240Н
3	High Temperature Operation	Endurance test applying the electric stress (voltage & current) and the thermal stress to the element for a long time	50℃ 240H
4	Low Temperature Operation	0℃ 240H	
5	High Temperature /Humidity Storage	Endurance test applying the high temperature and high humidity storage for a long time	60℃ 95%RH 240H
6	Temperature Cycle	Endurance test applying the low and high temperature cycle $-30^{\circ}C \leftrightarrow 25^{\circ}C \leftrightarrow 80^{\circ}C \leftrightarrow 25^{\circ}C$ $30^{\circ}min 5^{\circ}min 30^{\circ}min 5^{\circ}min \rightarrow 1^{\circ}$ cycle	-30℃/80℃ 10 cycles
7	Vibration Test (package state)	Endurance test applying the vibration during transportation	10Hz~500Hz, 100m/s <sup>2</sup> , 120min
8	Shock Test (package state)	Endurance test applying the shock during transportation	Half- sine wave, 300m/s <sup>2</sup> , 18ms
9	Atmospheric Pressure Test	Endurance test applying the atmospheric pressure during transportation by air	25kPa 16H

# 8.2 Failure Judgment Criterion

Criterion			Te	est	Iter	n N	0.			Failura Judgamant Critarian	
Item	1	2	3	4	5	6	7	8	9	Failure Judgement Criterion	
Basic Specification								$\checkmark$	$\checkmark$	Out of the basic Specification	
Electrical specification										Out of the electrical specification	
Mechanical Specification								$\checkmark$		Out of the mechanical specification	
Optical Characteristic									$\checkmark$	Out of the optical specification	
Note	For test item refer to 8.1										
Remark	Basic specification = Optical specification + Mechanical specification										

# 9. QUALITY LEVEL

Examination	At T <sub>a</sub> =25°C	Inspection							
or Test	(unless otherwise stated)	Min.	Max.	Unit	IL	AQL			
External Visual Inspection	Under normal illumination and eyesight condition, the distance between eyes and LCD is 25cm.	See Appendix A			II	Major 1.0 Minor 2.5			
Display Defects	Undernormalilluminationandeyesightcondition,display on inspection.	See Ap	pendix B		II	Major 1.0 Minor 2.5			
Note: Major defects: Open segment or common, Short, Serious damages, Leakage Miner defects: Others Sampling standard conforms to GB2828									

#### **10. Precautions for Use of LCD Modules**

- 10.1 Handling Precautions
- 10.1.1 The display panel is made of glass. Do not subject it to a mechanical shock by dropping it from a high place, etc.
- 10.1.2 If the display panel is damaged and the liquid crystal substance inside it leaks out, be sure not to get any in your mouth, if the substance comes into contact with your skin or clothes, promptly wash it off using soap and water.
- 10.1.3 Do not apply excessive force to the display surface or the adjoining areas since this may cause the color tone to vary.
- 10.1.4 The polarizer covering the display surface of the LCD module is soft and easily scratched. Handle this polarizer carefully.
- 10.1.5 If the display surface is contaminated, breathe on the surface and gently wipe it with a soft dry cloth. If still not completely clear, moisten cloth with one of the following solvents:
  - Isopropyl alcohol
  - Ethyl alcohol

Solvents other than those mentioned above may damage the polarizer. Especially, do not use the following:

- Water
- Ketone
- Aromatic solvents
- 10.1.6 Do not attempt to disassemble the LCD Module.
- 10.1.7 If the logic circuit power is off, do not apply the input signals.
- 10.1.8 To prevent destruction of the elements by static electricity, be careful to maintain an optimum work environment.
  - a. Be sure to ground the body when handling the LCD Modules.
  - b. Tools required for assembly, such as soldering irons, must be properly ground.
  - c. To reduce the amount of static electricity generated, do not conduct assembly and other work under dry conditions.
  - d. The LCD Module is coated with a film to protect the display surface. Be care when peeling off this protective film since static electricity may be generated.

- 10.2 Storage precautions
- 10.2.1 When storing the LCD modules, avoid exposure to direct sunlight or to the light of fluorescent lamps.
- 10.2.2 The LCD modules should be stored under the storage temperature range. If the LCD modules will be stored for a long time, the recommend condition is:

Temperature : $0^{\circ}$ C $40^{\circ}$ CRelatively humidity: $\leq 80\%$ 

- 10.2.3 The LCD modules should be stored in the room without acid, alkali and harmful gas.
- 10.3 The LCD modules should be no falling and violent shocking during transportation, and also should avoid excessive press, water, damp and sunshine.

# Appendix A

Inspection items and criteria for appearance defects

Items	Contents	Criteria					
Leakage		Not permitted					
Rainbow		According to the limit specimen					
Polarizer	Wrong polarizer attachment	Not permitted					
	Bubble between	Not counted		Max. 3 defects allowed			
	polarizer and glass	ф<0.3mm		0.3mm≤¢≤0.5mm			
	Scratches of polarizer	According to the limit specimen					
Black spot (in viewing area)		Not counted	Max. 3 spots allowed		Max. 3		
		X<0.2mm	0.2mm≤X≤0.5mm				
		X=(a+b)/2	spots (lines)				
Black line (in viewing area)		Not counted	Max. 3 lines allowed		allowed		
		a<0.02mm	0.021	mm≪a≪0.05mm b≪2.0mm			
Progressive cracks		Not permitted					

# Appendix B

Inspection items and criteria for display defects

Items		Contents	Criteria				
Open segment or open common		Not permitted					
Short		Not permitted					
Wrong viewing angle			Not permitted				
Contrast radio uneven			According to the limit specimen				
Crosstalk			According to the limit specimen				
	-		Not counted	Max.3 dots allowed	_		
			X<0.1mm	0.1mm≤X≤0.2mm			
Pin holes and cracks in segment (DOT)			X=(a+b)/2	Max.3 dots			
		Not counted	Max.2 dots allowed	allowed			
		A<0.1mm	0.1mm≪A≪0.2mm D<0.25mm				
Black spot (in viewing area)	_		Not counted	Max.3 spots allowed			
			X<0.1mm	0.1mm≪X≪0.2mm	-		
			X=(a+b)/2	Max.3 spots			
Black line			Not counted	Max.3 lines allowed	(lines) allowed		
(in viewing area)			a<0.02mm	0.02mm≤a≤0.05mm b≤0.5mm			

# Appendix B

Inspection	items a	and	criteria	for	display	defects	(continued)
1					1 2		( )

Items	Content	Criteria				
		Not counted	Max. 2 defects allowed			
		x<0.1mm	0.1mm≪x≪0.2mm			
		x=(a+b)/2				
			1			
	D-+/+/a	Not counted	Max. 1 defects allowed	defects allowed		
Transfor- mation of segment		a<0.1mm	0.1mm≪a≪0.2mm D>0			
		Max.2 defects 0.8W≤a≤1.2 a=measured va W=nominal va				