

## **Inductors for Power Circuits**

Wound Ferrite

# CLFseries

CLF7045 CLF10040



### **REMINDERS FOR USING THESE PRODUCTS**

Before using these products, be sure to request the delivery specifications.

### SAFETY REMINDERS

Please pay sufficient attention to the warnings for safe designing when using these products.

<ul> <li>The storage period is less than 6 months. Be sure to follow the stor less).</li> <li>If the storage period elapses, the soldering of the terminal electrod</li> </ul>								
O Do not use or store in locations where there are conditions such as	gas corrosion (salt, acid, alkali, etc.).							
<ul> <li>Before soldering, be sure to preheat components.</li> <li>The preheating temperature should be set so that the temperature does not exceed 150°C.</li> </ul>	difference between the solder temperature and chip temperature							
<ul> <li>Soldering corrections after mounting should be within the range of If overheated, a short circuit, performance deterioration, or lifespan</li> </ul>	-							
When embedding a printed circuit board where a chip is mounted to a set, be sure that residual stress is not given to the chip due to the overall distortion of the printed circuit board and partial distortion such as at screw tightening portions.								
<ul> <li>Self heating (temperature increase) occurs when the power is turned design.</li> </ul>	ed ON, so the tolerance should be sufficient for the set thermal							
<ul> <li>Carefully lay out the coil for the circuit board design of the non-magn A malfunction may occur due to magnetic interference.</li> </ul>	etic shield type.							
$\bigcirc$ Use a wrist band to discharge static electricity in your body through	the grounding wire.							
$\bigcirc$ Do not expose the products to magnets or magnetic fields.								
$\bigcirc$ Do not use for a purpose outside of the contents regulated in the d	elivery specifications.							
<ul> <li>The products listed on this catalog are intended for use in general equipment, home appliances, amusement equipment, computer equipment, industrial robots) under a normal operation and use con The products are not designed or warranted to meet the requireme quality require a more stringent level of safety or reliability, or whos society, person or property.</li> <li>If you intend to use the products in the applications listed below or is set forth in the each catalog, please contact us.</li> </ul>	uipment, personal equipment, office equipment, measurement ndition. nts of the applications listed below, whose performance and/or e failure, malfunction or trouble could cause serious damage to							
<ol> <li>Aerospace/Aviation equipment</li> <li>Transportation equipment (cars, electric trains, ships, etc.)</li> <li>Medical equipment</li> <li>Power-generation control equipment</li> <li>Atomic energy-related equipment</li> <li>Seabed equipment</li> <li>Transportation control equipment</li> </ol> When designing your equipment even for general-purpose application	<ul> <li>(8) Public information-processing equipment</li> <li>(9) Military equipment</li> <li>(10) Electric heating apparatus, burning equipment</li> <li>(11) Disaster prevention/crime prevention equipment</li> <li>(12) Safety equipment</li> <li>(13) Other applications that are not considered general-purpose applications</li> </ul>							
protection circuit/device or providing backup circuits in your equipmen								

**⊗TDK** 

**公TDK** 



### **Inductors for Power Circuits**

**Wound Ferrite** 

Product compatible with RoHS directive Halogen-free Compatible with lead-free solders

## **Overview of the CLF Series**

#### PRODUCT INFORMATION

This product offers superb EMC handling enabled by the construction of a high magnetic shield.

#### FEATURES


O Magnetic shield type wound inductor for power circuits.

 $\bigcirc$  1 to 470 $\mu$ H, wide E-6 Series lineup allows for various usages.

#### APPLICATION

Thin-screen TVs, LCDs, AV equipment, STBs, LED lights, industrial equipment

### PART NUMBER CONSTRUCTION



#### OPERATING TEMPERATURE RANGE, PACKAGE QUANTITY, PRODUCT WEIGHT

	Temperat	ure range		
Туре	Operating temperature*	Storage temperature**	Package quantity	Individual weight
	(° <b>C</b> )	(° <b>C</b> )	(pieces/reel)	(g)
CLF7045			1000	0.72
CLF10040	-40 to +105 -40 to +105		800	1.32

\* Operating temperature range includes self-temperature rise.


\*\* The Storage temperature range is for after the circuit board is mounted.

RoHS Directive Compliant Product: See the following for more details related to RoHS Directive compliant products. http://www.tdk.co.jp/rohs/
 Halogen-free: Indicates that CI content is less than 900ppm, Br content is less than 900ppm, and that the total CI and Br content is less than 1500ppm.

⊗TDK

### **Overview of the CLF Series**

### RECOMMENDED REFLOW PROFILE

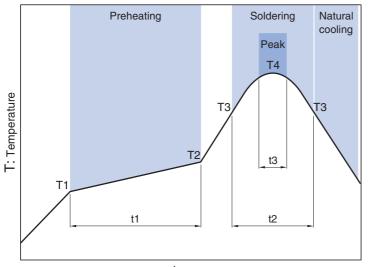

t: Time


Preheating		Soldering		Peak		
Temp. Time		Temp.	Time	Temp.	Time	
T1	T2	t1	Т3	t2	T4	t3
150°C	180°C	60 to 120s	230°C	30s	250°C	5s

(4/12)

# CLF series CLF7045 Type

### **SHAPE & DIMENSIONS**

6.9±0.2

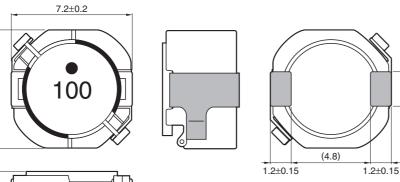


4.5±0.3

Dimensions in mm

2.0±0.1

### RECOMMENDED LAND PATTERN



Dimensions in mm

(5/12)

### CLF series CLF7045 Type

### ELECTRICAL CHARACTERISTICS

#### CHARACTERISTICS SPECIFICATION TABLE

		Measuring	DC resistance	Rated cur	rent*	
-		frequency	$(m\Omega)$	(A)		Part No.
(µH)	tolerance	(kHz)	(1122)	ldc1	ldc2	
1.0	±30%	100	9.6m±30%	8.9	5.2	CLF7045T-1R0N
1.5	±30%	100	11.0m±30%	7.3	4.9	CLF7045T-1R5N
2.2	±30%	100	14.6m±30%	5.5	4.3	CLF7045T-2R2N
3.3	±30%	100	16.4m±30%	5.0	4.1	CLF7045T-3R3N
4.7	±30%	100	20m±30%	4.1	3.6	CLF7045T-4R7N
6.8	±30%	100	27m±30%	3.3	3.0	CLF7045T-6R8N
10	±20%	100	38m±20%	2.7	2.5	CLF7045T-100M
15	±20%	100	51m±20%	2.3	2.1	CLF7045T-150M
22	±20%	100	69m±20%	1.9	1.8	CLF7045T-220M
33	±20%	100	0.11±20%	1.55	1.40	CLF7045T-330M
47	±20%	100	0.15±20%	1.30	1.20	CLF7045T-470M
68	±20%	100	0.21±20%	1.10	0.95	CLF7045T-680M
100	±20%	100	0.33±20%	0.90	0.75	CLF7045T-101M
150	±20%	100	0.48±20%	0.67	0.61	CLF7045T-151M
220	±20%	100	0.66±20%	0.62	0.52	CLF7045T-221M
330	±20%	100	1.03±20%	0.49	0.42	CLF7045T-331M
470	±20%	100	1.42±20%	0.43	0.37	CLF7045T-471M

\* Rated current: smaller value of either Idc1 or Idc2.

Idc1: When based on the inductance change rate (10% below the initial value) Idc2: When based on the temperature increase (Temperature increase of 30°C)

#### ○ Measurement equipment


Measurement item	Product No.	Manufacturer
L	4285A	Agilent Technologies
DC resistance	VP-2941A	Panasonic
Rated current Idc1	4285A+42841A+42842C	Agilent Technologies

(6/12)

### CLF series CLF7045 Type

### ELECTRICAL CHARACTERISTICS

### L FREQUENCY CHARACTERISTICS GRAPH

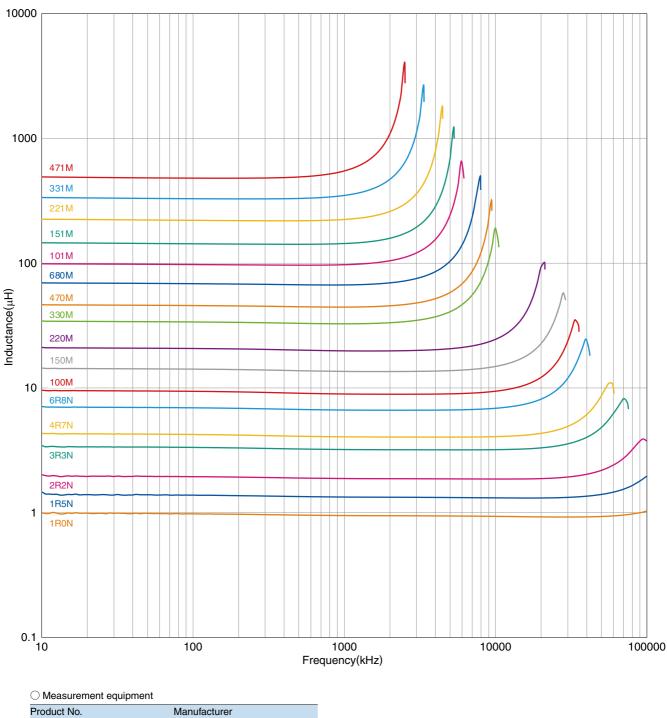


4294A Agilent Technologies \* Equivalent measurement equipment may be used.

### CLF series CLF7045type

### ELECTRICAL CHARACTERISTICS

#### □INDUCTANCE VS. DC BIAS CHARACTERISTICS GRAPH

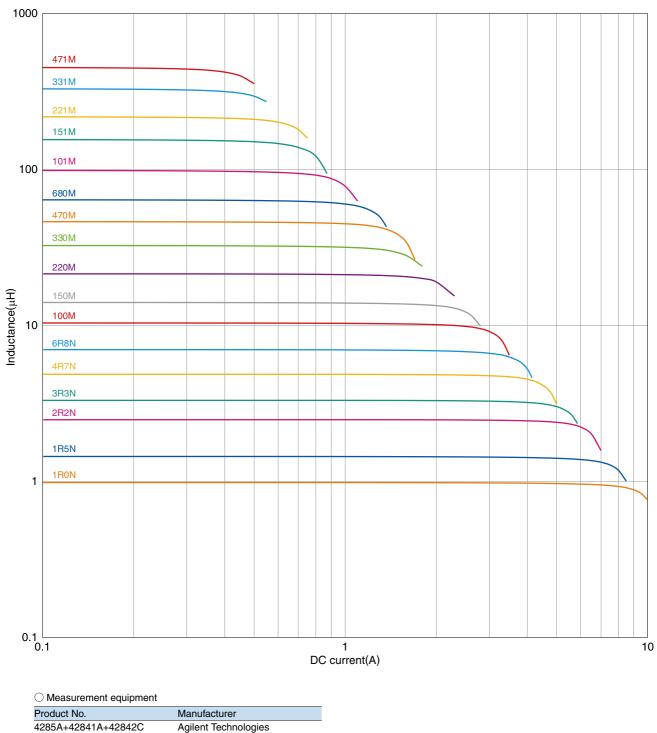


4285A+42841A+42842CAgilent Technologies\* Equivalent measurement equipment may be used.

# CLF series CLF10040 Type

### **SHAPE & DIMENSIONS**


I

Ν

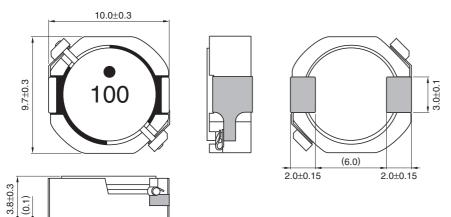

Dimensions in mm

#### RECOMMENDED LAND PATTERN



Dimensions in mm

(9/12)

### CLF series CLF10040 Type

### ELECTRICAL CHARACTERISTICS

### CHARACTERISTICS SPECIFICATION TABLE

L		Measuring frequency	DC resistance	Rated curr (A)	ent*	Part No.	
(µH)	Tolerance	—— (kHz)	(Ω)	ldc1	ldc2		
1.0	±30%	100	5.7m±30%	12.0	6.3	CLF10040T-1R0N	
1.5	±30%	100	7.1m±30%	10.6	5.8	CLF10040T-1R5N	
2.2	±30%	100	9.7m±30%	7.5	5.0	CLF10040T-2R2N	
3.3	±30%	100	11.0m±30%	6.6	4.8	CLF10040T-3R3N	
4.7	±30%	100	14.5m±30%	5.4	4.2	CLF10040T-4R7N	
6.8	±30%	100	18.5m±30%	4.8	3.7	CLF10040T-6R8N	
10	±20%	100	26m±20%	4.0	3.3	CLF10040T-100M	
15	±20%	100	40m±20%	3.2	2.5	CLF10040T-150M	
22	±20%	100	55m±20%	2.7	2.2	CLF10040T-220M	
33	±20%	100	80m±20%	2.2	1.7	CLF10040T-330M	
47	±20%	100	125m±20%	1.9	1.3	CLF10040T-470M	
68	±20%	100	0.18±20%	1.6	1.1	CLF10040T-680M	
100	±20%	100	0.24±20%	1.3	1.0	CLF10040T-101M	
150	±20%	100	0.38±20%	1.0	0.8	CLF10040T-151M	
220	±20%	100	0.52±20%	0.88	0.70	CLF10040T-221M	
330	±20%	100	0.86±20%	0.70	0.53	CLF10040T-331M	
470	±20%	100	1.21±20%	0.56	0.44	CLF10040T-471M	

\* Rated current: smaller value of either Idc1 or Idc2.

Idc1: When based on the inductance change rate (10% below the initial value)

Idc2: When based on the temperature increase (Temperature increase of  $30^\circ$ C)

#### $\bigcirc$ Measurement equipment


Measurement item	Product No.	Manufacturer
L	4285A	Agilent Technologies
DC resistance	VP-2941A	Panasonic
Rated current Idc1	4285A+42841A+42842C	Agilent Technologies

**公TDK** 

### CLF series CLF10040 Type

### ELECTRICAL CHARACTERISTICS

#### L FREQUENCY CHARACTERISTICS GRAPH

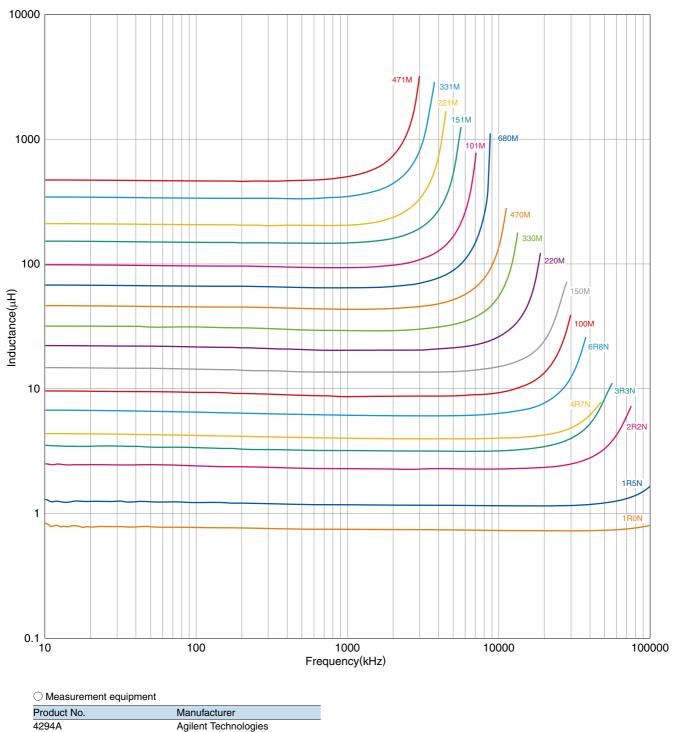


⊗TDK

### CLF series CLF10040 Type

### ELECTRICAL CHARACTERISTICS

### □ INDUCTANCE VS. DC BIAS CHARACTERISTICS GRAPH

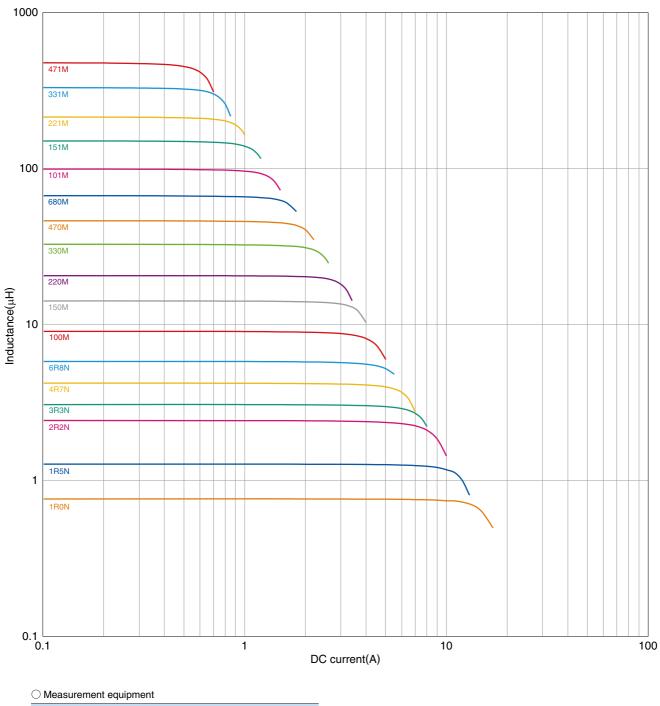


Product No.	Manufacturer	
4285A+42841A+42842C	Agilent Technologies	
at a state of the set	a such a second second second second second	

### CLF series

## **Packaging Style**


### REEL DIMENSIONS



Туре	Α	В	С	D	E
CLF7045	ø330	22.4	ø50	16.4	2
CLF10040	ø330	30.4	ø50	24.4	2

\* These values are typical values.

### TAPE DIMENSIONS

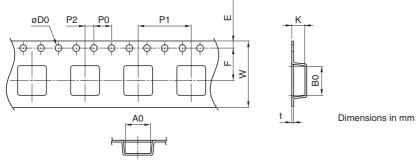

Туре	A0	B0	øD0	E	F	P0	P1	P2	W	K	t
CLF7045	7.5	7.5	1.5+0.1/-0	1.75±0.1	7.5±0.1	4.0±0.1	12.0±0.1	2.0±0.1	16.0±0.3	4.9	0.4
CLF10040	10.4	10.4	1.5+0.1/-0	1.75±0.1	11.5±0.1	4.0±0.1	16.0±0.1	2.0±0.1	24.0±0.3	4.6	0.5