

KR Electronics

General Description


KR Electronics part number 2920-400 is a 400 KHz bandpass filter. The filter has a minimum 3 dB bandwidth of 25 KHz. Other bandwidths available. Please consult the factory.

Features


- 400 KHz Center Frequency
- 25 KHz minimum 3 dB BW
- BNC Connectors
- 50 Ω Source and Load

Typical Performance

Passband Amplitude & Group Delay
(1 dB/div & 5 usec/div)

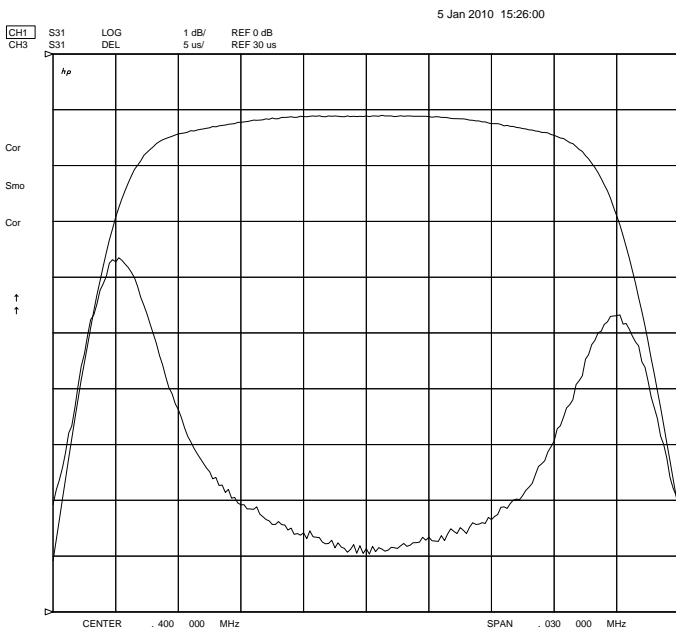

Overall Response
(10 dB/div)

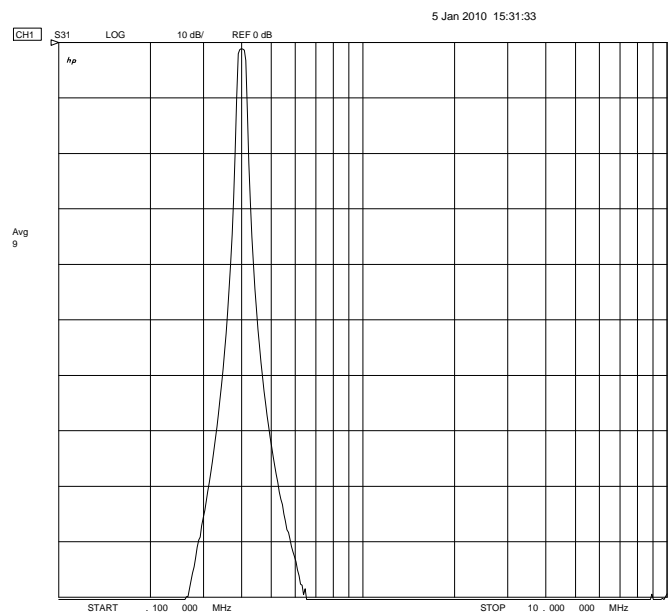

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001


Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982

KR Electronics 2920-400

Specifications

Parameter	Specification
Filter type	Bandpass
Center Frequency	400 KHz
Insertion Loss	< 3 dB (1.2 dB typical)
3 dB Bandwidth	25 KHz minimum
40 dB Bandwidth	72 KHz typical
60 dB Bandwidth	126 KHz typical
Source and Load	50 Ω

Physical Dimensions

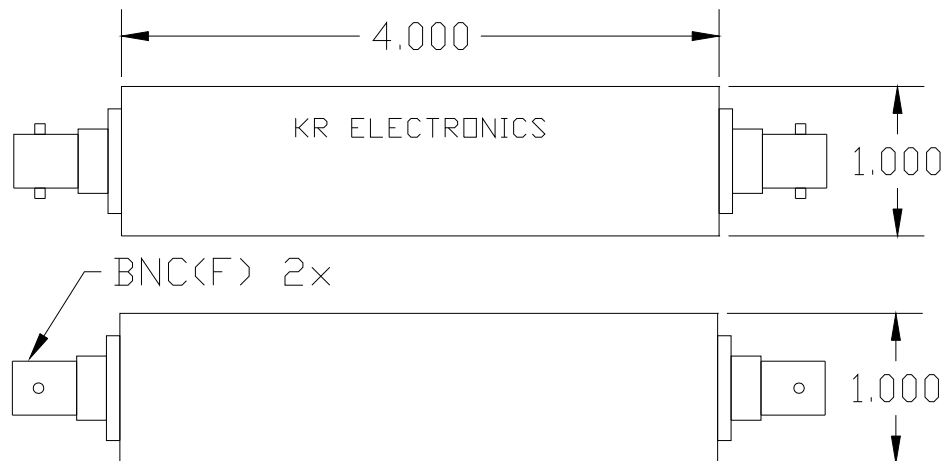

Notes:

1. Dimensions in inches
2. Rectangular case