

BAND PASS FILTER

MODEL FNS-400

OPTIMIZED BANDWIDTH


F_c = 400 MHz

SPECIFICATIONS:

| | | | |
|--------------------------|-----------------|-------------------------------|----------------|
| Center Frequency: | 400 MHz | VSWR: | 1.5:1 (Typ) |
| Passband I. Loss: | 3.0 dB (Max) | Input Power | 1 Watt (Max) |
| Passband: | 380.9 - 420 MHz | Impedance: | 50 Ohms |
| 35 dB Bandwidth: | 190.5 - 840 MHz | Operating Temp. Range: | -20° to +70° C |



MECHANICAL OUTLINE:124S

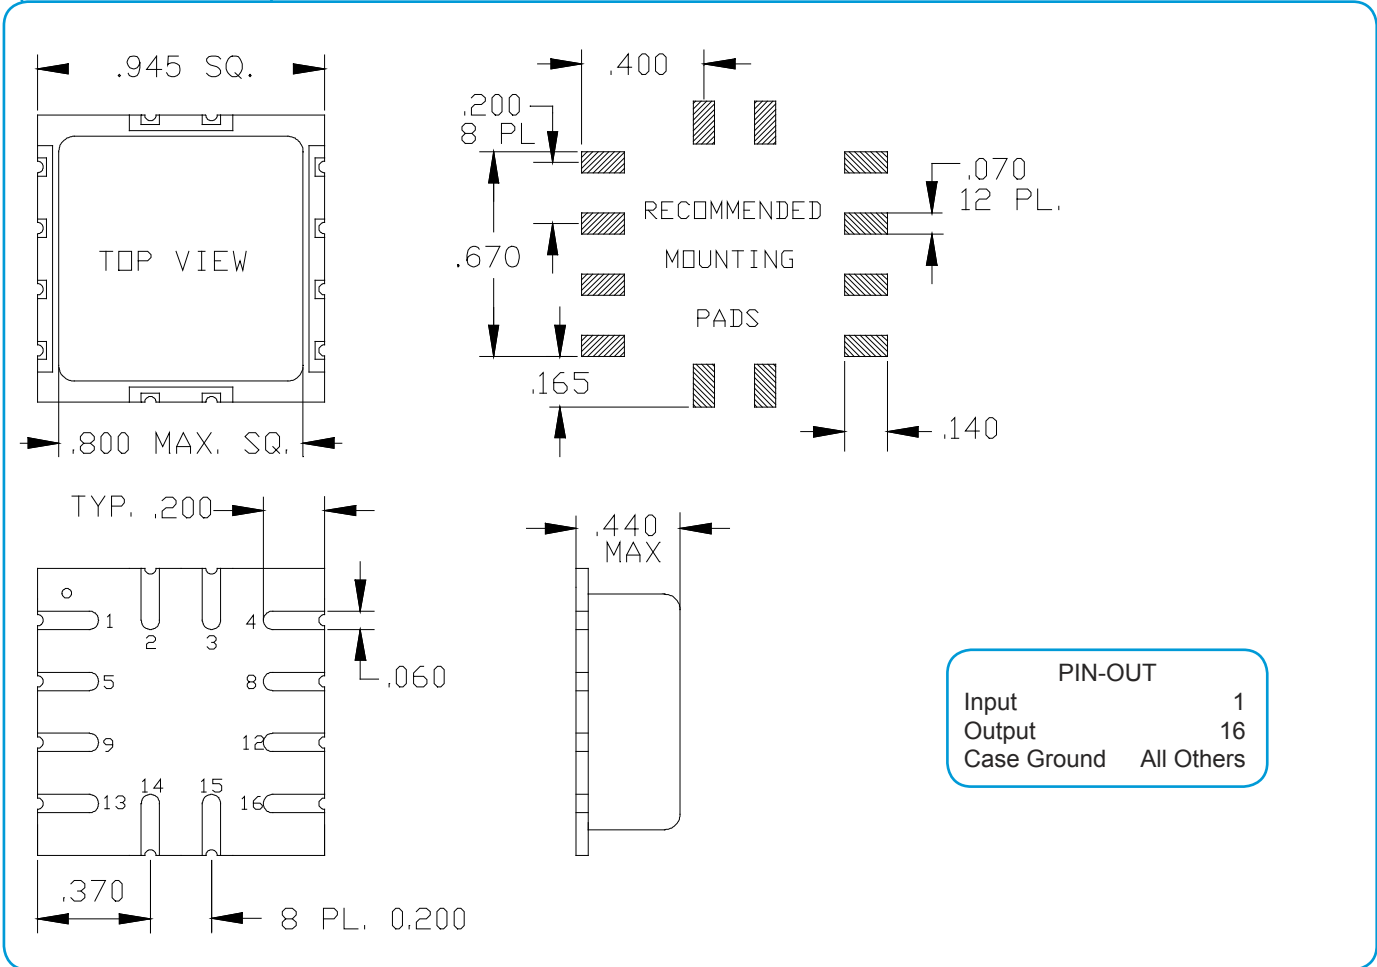

BAND PASS FILTER MODEL FNS-400

OPTIMIZED BANDWIDTH

$F_c = 400$ MHz

PERFORMANCE PLOTS

