



40 GHz Flip Chip Resistive Divider

PDR05848




DLI • Novacap • Syfer • Voltronics

www.dilabs.com

www.knowlesc capacitors.com

DESCRIPTION

A flip chip resistive divider ideal for applications where small size and broad band performance are critical for success. The splitter offers low excessive loss from DC to 40GHz in addition to 20dB of return loss on all ports. This component is ideal for test and measurement and optical applications. The divider is available with all pads bumped with gold-tin solder for easy integration.

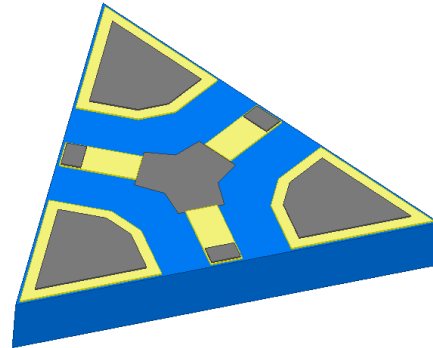

FEATURES


- Small Size
- Frequency Stable over Temperature
- Flip Chip Solder Surface Mountable
- Available with AuSn Bumped IO Pads
- Excellent Repeatability
- Operating Temp: -55°C to +125°C
- Characteristic Impedance: 50Ω

SPECIFICATIONS*

Passband (GHz)	DC to 40GHz
Insertion Loss (dB)	0.5 dB typ @ 25°C
Return Loss (dB)	20dB typ @ 25°C
Size (LxWxH)	0.075 x 0.075 x 0.001 in 1.905 x 1.905 x 0.254 mm

Typical Measured Performance

*Electrical specifications based on anticipated performance judged from simulation data. Final specification TBD.

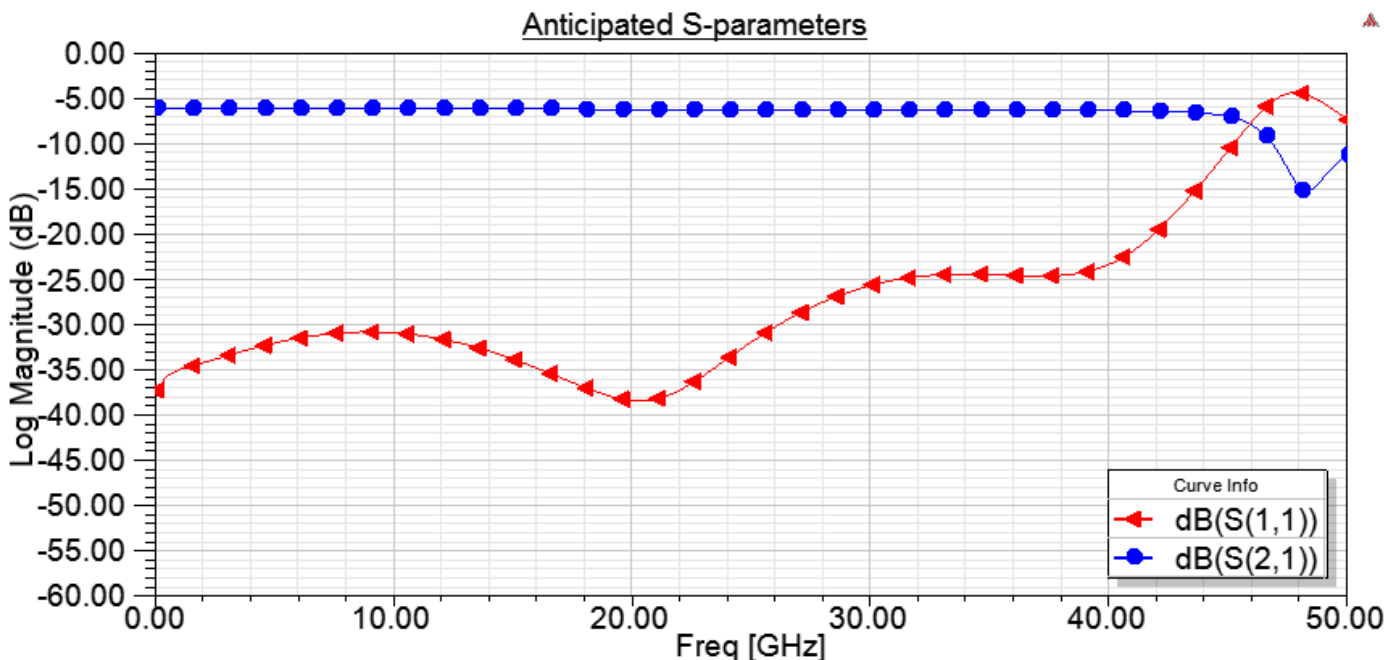



40 GHz Flip Chip Resistive Divider

PDR05848




DLI • Novacap • Syfer • Voltronics


www.dilabs.com

www.knowlescapacitors.com

Physical Dimensions

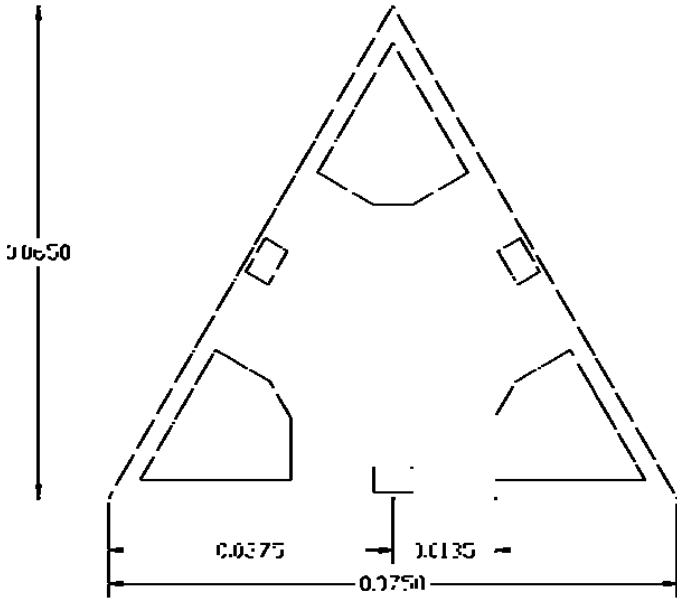

Top View

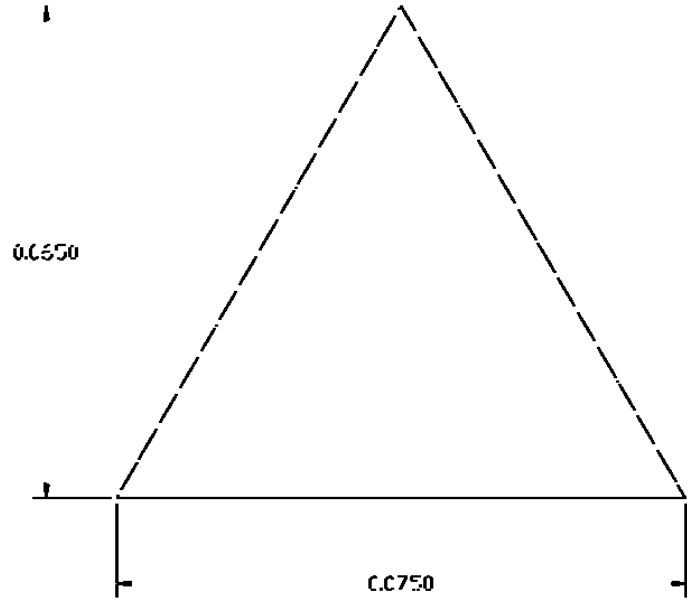

Bottom View

Recommended PCB Layout

