Features

- Reflector type (3.0×2.0mm, t=1.3mm)
- Reflector improved the concentration of viewing angle and luminous intensity to the front direction

Size

Dimensions


3020 (1208)
3.0×2.0mm (t=1.3mm)



Outline



Recommended Solder Pattern

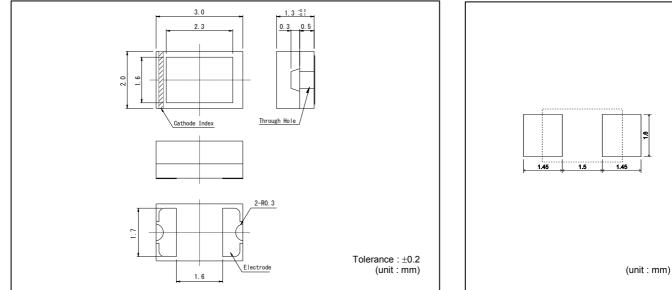

Specifications

				Abs	olute Max	kimum Ra	atings (Ta=25°0	C)			Electri	cal and	I Optica	al Char	acterist	ics (Ta	=25°C)		
Part No.	Chip	Emitting			Peak Forward		Operating Temp	Storage Temp.		Voltag V _F					aveleng				nsity I
	Structure	Color	Dissipation P _D (mW)		Current I _{FP} (mA)	Voltage V _R (V)	Topr(°C)	Tstg(°C)	Typ. (V)	l _F (mA)	Max. (μA)			Typ. (nm)	Max.* ² (nm)		Min. (mcd)	Typ. (mcd)	l _F (mA
SML-012VT(A)			75	30			-40 to +100		2.0	((111)	(-)	626		636	(35.5		(
SML-012V8T			54	20			-40 to +85		2.2	1			625	630	635		25	63	
SML-013UT		Red	75	30			-30 to +85	-	2.0	1			619	624	629		90	220	
SML-012U8T		Reu	54	20			-40 to +85		2.2	1							40	100	
SML-012UT			75	30	1		-40 to +100		2.0				615	620	625		36	100	
SML-011UT			75	30			-40 10 +100		2.0								22	63	
SML-012D8T			54	20			-40 to +85		2.2								63	160	
SML-012DT	AlGaInP	Orange	75	30	100* ¹	5	_10 to +100	-40 to +100	2.0	20	10	5	602	605	608	20	36	100	20
SML-011DT	on GaAs		10	00		5	-+0 10 + 100	-40 to $+100$	2.0	20	10	0				20	22	63	53
SML-012Y8T			54	20			–40 to +85		2.2								40	100	
SML-013YT		Yellow					-+0 10 +00		2.1				587	590	593		100	250	
SML-012YT		1 Chow	75	30			–40 to +100		2.0	2			007	000	000		36	100	100
SML-011YT							4010 - 100		2.0								22	63	
SML-012M8T		Yellowish Green	54	20			-40 to +85		2.2				569	572	575		16	40	
SML-012P8T		Green	54	20			-+0 10 +03		2.2				557	560	563		2.5	6.3	
SML-012PT(A)		Green	62	25	60* ¹		-40 to +100		2.1				558	000	564		9	18	

*1:Duty1/10, 1kHz *2:Reference







Fig.1 Forward Current - Forward Voltages









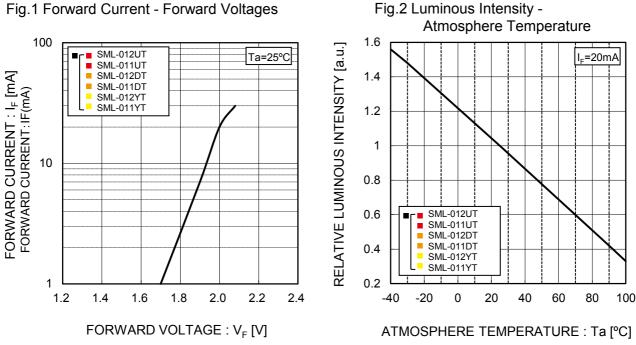




Fig.1 Forward Current - Forward Voltages







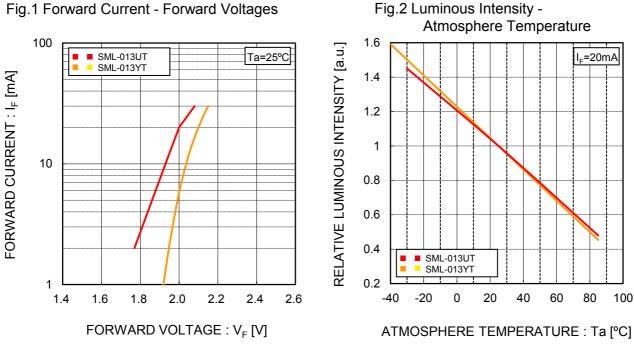




Fig.1 Forward Current - Forward Voltages









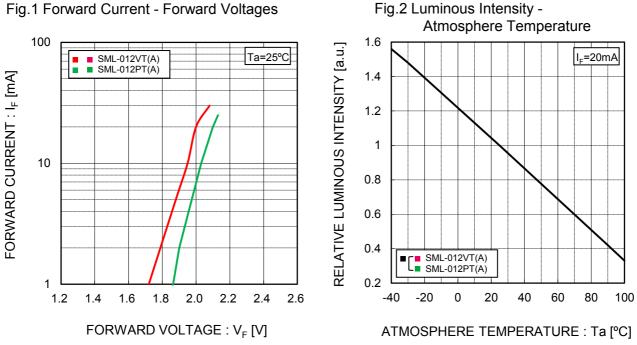


Fig.1 Forward Current - Forward Voltages










•Viewing Angle

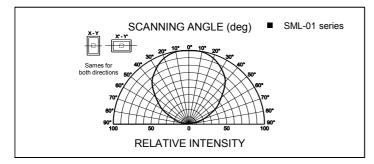

Rank Reference of Brightness

Red(V,U)													(Ta=25⁰C,	$I_F = 20 \text{mA}$
Rank	J	K	L	М	N	Р	Q	R	S	Т	U	V	W	Х
lv (mcd)	2.5 to 4.0	4.0 to 6.3	6.3 to 10	10 to 16	16 to 25	25 to 40	40 to 63	63 to 100	100 to 160	160 to 250	250 to 400	400 to 630	630 to 1000	1000 to 1600
SML-012V8T														
SML-013UT														
SML-012U8T														
SML-012UT														
SML-011UT														

*Brightness on specification sheet include tolerance of within $\pm 10\%.$

																((Ta=25°C, I	$I_F = 20 \text{mA}$
Rank	AG	AH	AJ	AK	AL	AM	AN	AP	AQ	AR	AS	AT	AU	AV	AW	AX	AY	AZ
lv (mcd)	9.0 to 11.2	11.2 to 14	14 to 18	18 to 22.4	22.4 to 28	28 to 35.5	35.5 to 45	45 to 56	56 to 71	71 to 90	90 to 112	112 to 140	140 to 180	180 to 224	224 to 280	280 to 355	355 to 450	450 to 560
SML-012VT(A)																1		

 $\ast \mbox{Please}$ note that the brightness of some products may fall between ranks (half rank)

Orange(D)												(Ta=25⁰C,	I⊧=20mA)
Rank	J	K	L	М	Ν	Р	Q	R	S	Т	U	V	W	Х
lv (mcd)	2.5 to 4.0	4.0 to 6.3	6.3 to 10	10 to 16	16 to 25	25 to 40	40 to 63	63 to 100	100 to 160	160 to 250	250 to 400	400 to 630	630 to 1000	1000 to 1600
SML-011DT														
SML-012D8T														
SML-012DT														

*Brightness on specification sheet include tolerance of within $\pm 10\%.$

Yellow(Y)													(Ta=25⁰C,	I _F =20mA)
Rank	J	K	L	М	Ν	Р	Q	R	S	Т	U	V	W	Х
lv (mcd)	2.5 to 4.0	4.0 to 6.3	6.3 to 10	10 to 16	16 to 25	25 to 40	40 to 63	63 to 100	100 to 160	160 to 250	250 to 400	400 to 630	630 to 1000	1000 to 1600
SML-011YT														
SML-012Y8T														
SML-012YT														
SML-013YT														

*Brightness on specification sheet include tolerance of within $\pm 10\%.$

Green(M,F))												(Ta=25⁰C,	I _F =20mA)
Rank	J	К	L	М	Ν	Р	Q	R	S	Т	U	V	W	Х
lv (mcd)	2.5 to 4.0	4.0 to 6.3	6.3 to 10	10 to 16	16 to 25	25 to 40	40 to 63	63 to 100	100 to 160	160 to 250	250 to 400	400 to 630	630 to 1000	1000 to 1600
SML-012M8T														
SML-012P8T														


*Brightness on specification sheet include tolerance of within $\pm 10\%$

																	(Ta=25°C,	$I_F = 20 \text{mA}$)
Rank	AG	AH	AJ	AK	AL	AM	AN	AP	AQ	AR	AS	AT	AU	AV	AW	AX	AY	AZ
lv (mcd)	9.0 to 11.2	11.2 to 14	14 to 18	18 to 22.4	22.4 to 28	28 to 35.5	35.5 to 45	45 to 56	56 to 71	71 to 90	90 to 112	112 to 140	140 to 180	180 to 224	224 to 280	280 to 355	355 to 450	450 to 560
SML-012PT(A)																		

*Please note that the brightness of some products may fall between ranks (half rank)



Taping

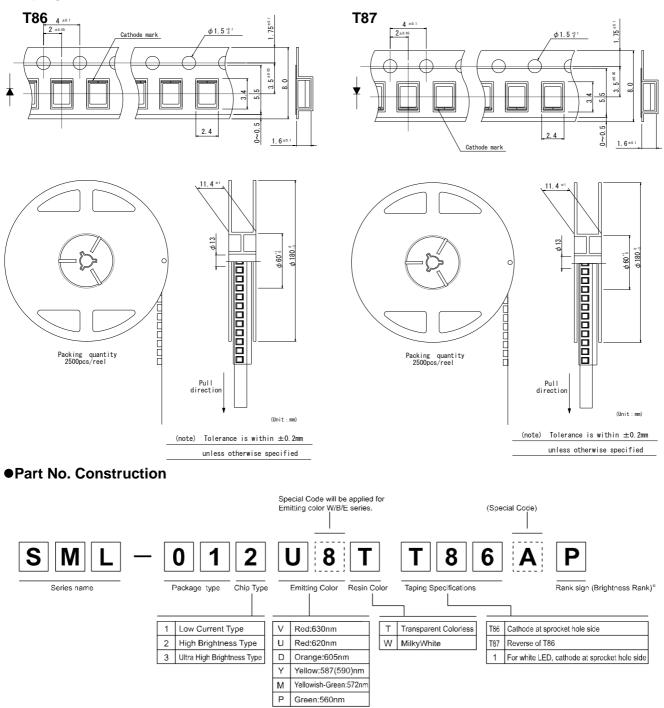

* Concerning the Brightness rank

· Please refer to the rank chart above for luminous intensity classification.

Part name is individual for each rank.

 When shipped as sample, the part name will be a representative part name. General products are free of ranks. Please contact sales if rank appointment is needed.

Packing Specification

ROHM LED products are being shipped with desiccant (silica gel) concluded in moisture-proof bags.

Pasting the moisture sensitive label on the outer surface of the moisture-proof bags or enclosing the humidity indication card

inside the bag is available upon request.

Please contact the nearest sales office or distributer if necessary.

Attention Points In Handling

This product was developed as a surface mount LED especially suitable for reflow soldering. Please take care of following points when using this device.

1.DESIGNING OF PCB

As for a recommendable solder pattern, Please refer to Fig-1.

The size and direction of the pad pattern depends on the condition of the PCB, Thorough design review is recommended before the final designing.

This product of structured with rear/bottom electrode to be soldered.

The formation of solder fillet is not guaranteed due to its electrode shape

2.MOUNTING

This LED was designed to fit various mounting machines.

A round type nozzle is recommended for a hollow lens surface.

3.SOLDERING

LED products do not contain reinforcement materials such as glass fillers.

Therefore, thermal stress by soldering greatly influence its reliability.

The temperature conditions for reflow soldering should therefore be set up according to the characteristic of this product. (See Fig-2) Number of reflow process shall be max 2 times and these processes shall be performed in a row. Cooling process to normal temperature. Shall be required between first and second soldering process.

4.WASHING

Please note the following points when washing is required after soldering.

4-1) WASHING SOLVENT

Isopropyl alcohol or other alcohol solvent is recommendable.

4-2) TEMPERATURE

Below 30°C, immersion time ; within 3 minutes.

4-3) ULTRA SONIC WASHING

Below 15/1 litter of solvent tub.


4-4) COOLING


Below 100°C within 3 minutes.

5.EROSION GAS

Utilization in erosion gas atmosphere may degenerate the plating surface which might cause deterioration of solder strength, optical characteristics, or functions.

Please take precautions against occurrence of gas from the surrounding parts on the occasion of custody, and also after mounted on circuit board.





SML-01 series

6.STORAGE

At reflow soldering, the reliability of this product is often influenced by moisture

absorption so we apply the packaging with moisture proof for better condition is use, please also note that

6-1) Not to be opened before using.

- 6-2) To be kept in our moisture proof packaging with some desiccant (SILICA GEL) after opening it.
 - To be baked in case the SILICA GEL indicator changed its color from either blue to clear or green to pink.
- 6-3) Please use within 168 hours after the package was opened. (Condition at 30°C, max.70%Rh.)

In case it is not used within 168 hours, please put it back into our packaging.

6-4) BAKING

Please bake under reel condition at 60°C, 12~24 hours (max.20%Rh) after un-sealing. While baking is done, the reel and emboss tape may be easily deformed. Please be careful not to give any stress.

7.LIFE TIME

This product will cause reduction of luminous intensity depending on the using conditions and environmental. Please inquire our sales contact if long life time is required on your application.



	Notes
1)	The information contained herein is subject to change without notice.
2)	Before you use our Products, please contact our sales representative and verify the latest specifica- tions :
3)	Although ROHM is continuously working to improve product reliability and quality, semicon- ductors can break down and malfunction due to various factors. Therefore, in order to prevent personal injury or fire arising from failure, please take safety measures such as complying with the derating characteristics, implementing redundant and fire prevention designs, and utilizing backups and fail-safe procedures. ROHM shall have no responsibility for any damages arising out of the use of our Poducts beyond the rating specified by ROHM.
4)	Examples of application circuits, circuit constants and any other information contained herein are provided only to illustrate the standard usage and operations of the Products. The peripheral conditions must be taken into account when designing circuits for mass production.
5)	The technical information specified herein is intended only to show the typical functions of and examples of application circuits for the Products. ROHM does not grant you, explicitly or implicitly, any license to use or exercise intellectual property or other rights held by ROHM or any other parties. ROHM shall have no responsibility whatsoever for any dispute arising out of the use of such technical information.
6)	The Products are intended for use in general electronic equipment (i.e. AV/OA devices, communi- cation, consumer systems, gaming/entertainment sets) as well as the applications indicated in this document.
7)	The Products specified in this document are not designed to be radiation tolerant.
8)	For use of our Products in applications requiring a high degree of reliability (as exemplified below), please contact and consult with a ROHM representative : transportation equipment (i.e. cars, ships, trains), primary communication equipment, traffic lights, fire/crime prevention, safety equipment, medical systems, servers, solar cells, and power transmission systems.
9)	Do not use our Products in applications requiring extremely high reliability, such as aerospace equipment, nuclear power control systems, and submarine repeaters.
10)	ROHM shall have no responsibility for any damages or injury arising from non-compliance with the recommended usage conditions and specifications contained herein.
11)	ROHM has used reasonable care to ensur the accuracy of the information contained in this document. However, ROHM does not warrants that such information is error-free, and ROHM shall have no responsibility for any damages arising from any inaccuracy or misprint of such information.
12)	Please use the Products in accordance with any applicable environmental laws and regulations, such as the RoHS Directive. For more details, including RoHS compatibility, please contact a ROHM sales office. ROHM shall have no responsibility for any damages or losses resulting non-compliance with any applicable laws or regulations.
13)	When providing our Products and technologies contained in this document to other countries, you must abide by the procedures and provisions stipulated in all applicable export laws and regulations, including without limitation the US Export Administration Regulations and the Foreign Exchange and Foreign Trade Act.
14)	This document, in part or in whole, may not be reprinted or reproduced without prior consent of ROHM.



Thank you for your accessing to ROHM product informations. More detail product informations and catalogs are available, please contact us.

ROHM Customer Support System

http://www.rohm.com/contact/

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

ROHM Semiconductor:

SML-012Y8TT86
SML-012P8TT86
SML-012U8TT86
SML-012M8TT86
SML-012D8TT86
SML-012V8TT86
SML-012DTT86A
SML-012DTT86A
SML-012DTT86A
SML-012DTT86A
SML-012WTT86A
SML-012W