
25 Amp Schottky Rectifier

1N6095—1N6096

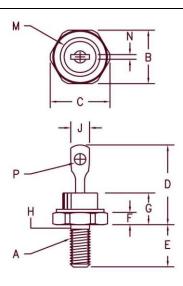

Notes:

- 1. 10-32 UNF3A threads
- 2. Full threads within 2 1/2 Threads.
- 3. Stud is Cathode.

Dim. Inches			Millimeter		
	Minimum	Maximum	Minimum	Maximum	
A					
В	.423	.438	10.74	11.13	
C		.505		12.83	
D	.600	.800	15.24	20.32	
E	.422	.453	10.72	11.51	
F	.075	.175	1.91	4.45	
G		.405		10.29	
Н	.163	.189	4.14	4.80	
J		.250		6.35	
M	.265	.350	6.73	8.89	Dia.
N	.020	.065	.510	1.65	
P	.060	.095	1.52	2.41	Dia.

DO-203AA (D04)

AMS	Working Peak	Repetitive Peak
Catalog Number	Reverse Voltage	Reverse Voltage
1N6095	30V	30V
1N6096	40V	40V

- Schottky Barrier Rectifier
- Guard Ring Protection
- Low Forward Voltage
- V_{RRM} 30 & 40 Volts
- 25 Amperes
- Reverse Energy Tested

	Electrical Characteristi	CS
Average forward current	IF (AV) 25 Amps	$T_{C} = 70^{o}$ C, half sine wave, $R_{\theta JC} = 2.0^{o}$ C/W
Maximum surge current	IFSM 400 Amps	8.3 ms, half sine
Max repetitive peak reverse current	I _{R(OV)} 2 Amps	f = 1 KHz, 25oC, 1 µsec square wave
Max peak forward voltage	V_{FM} .86 Volts	$I_{FS} = 78.5A$: $T_{C} = 70^{o}$ C*
Max peak forward voltage	V _{FM} .60 Volts	$I_{FM} = 5A$: $T_J = 25^{o}C^*$
Max peak reverse current	I_{RM} 250 mA	$V_{RRM},T_{J}={}_{125}{}^{o}\mathrm{C}^{*}$
Max peak reverse current	I _{RM} 1.5 mA	$V_{RRM}, T_{J} = 25^{o}C$
Max junction capacitance	$C_{ m J}$ 6000 pF	$V_{R=1.0V,}T_{J=25}{}^{o}\mathrm{C}$

	Thermal and Mechanical Cha	racteristics
Storage temp range	Tstg	-65°C to 150°C
Operating junction temp range	T_{J}	-65°C to 150°C
Max thermal resistance	$R_{ heta jc}$	2.0°C/W junction to case
Typical thermal resistance	$R_{ heta cs}$	0.5°C/W case to sink
Max mounting torque		15 inch pounds maximum
Weight		0.2 ounces (6.0 grams) typical

Tel. 1-973-377-9566 Fax. 1-973-377-3078

133 Kings Road Madison, New Jersey 07940 United States of America Document Page 1 of 2 Revised 05/2016



1N6095— 1N6096

Figure 1 Typical Forward Characteristics

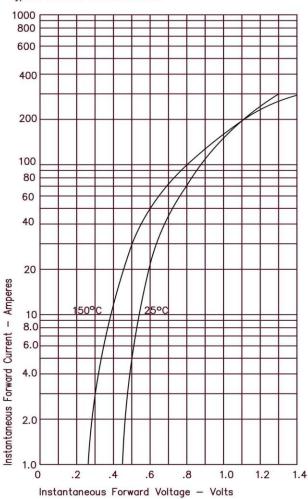


Figure 2 Typical Reverse Characteristics

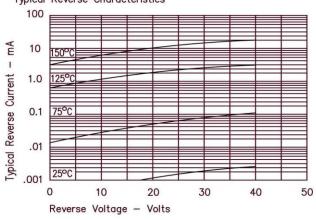


Figure 3
Typical Junction Capacitance

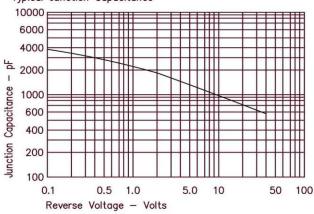


Figure 4
Forward Current Derating


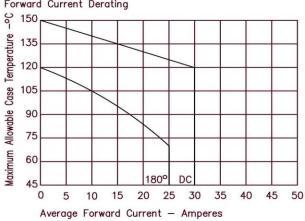


Figure 5
Maximum Forward Power Dissipation

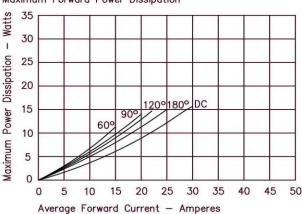

Document Page 2 of 2 Revised 05/2016

Madison, New Jersey 07940 United States of America