

# QUICKSWITCH® PRODUCTS 2.5V / 3.3V 24-BIT HIGH BANDWIDTH BUS SWITCH

## **IDTQS3VH16211**

## **FEATURES:**

- · N channel FET switches with no parasitic diode to Vcc
  - Isolation under power-off conditions
  - No DC path to Vcc or GND
  - 5V tolerant in OFF and ON state
- 5V tolerant I/Os
- · Low Ron 4Ω typical
- · Flat Ron characteristics over operating range
- · Rail-to-rail switching 0 5V
- Bidirectional dataflow with near-zero delay: no added ground bounce
- Excellent Ron matching between channels
- · Vcc operation: 2.3V to 3.6V
- · High bandwidth up to 500 MHz
- · LVTTL-compatible control Inputs
- · Undershoot Clamp Diodes on all switch and control Inputs
- · Low I/O capacitance, 4pF typical
- · Available in SSOP and TSSOP packages

## **APPLICATIONS:**

- · Hot-swapping
- 10/100 Base-T, Ethernet LAN switch
- · Low distortion analog switch
- · Replaces mechanical relay
- · ATM 25/155 switching


## **DESCRIPTION:**


The QS3VH16211 HotSwitch is a 24-bit high bandwidth bus switch. The QS3VH16211 has very low ON resistance, resulting in under 250ps propagation delay through the switch. This device operates as a 24-bit bus switch. When  $\overline{10E}$  is low, 1An is connected to 1Bn. When  $\overline{20E}$  is low, 2An is connected to 2Bn. In the OFF and ON states, the switches are 5V-tolerant. In the OFF state, the switches offer very high impedance at the terminals.

The combination of near-zero propagation delay, high OFF impedance, and over-voltage tolerance makes the QS3VH16211 ideal for high performance communications applications. It is also suitable for switching wide digital buses.

The QS3VH16211 is characterized for operation from -40 $^{\circ}$ C to +85 $^{\circ}$ C.


# FUNCTIONAL BLOCK DIAGRAM





The IDT logo is a registered trademark of Integrated Device Technology, Inc.

# **PIN CONFIGURATION**

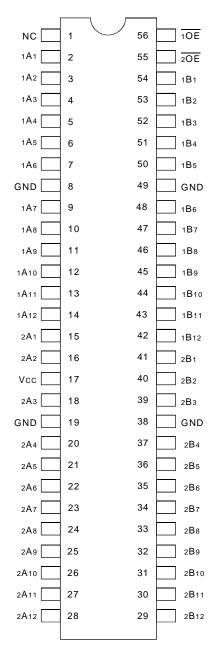

SSOP/ TSSOP TOP VIEW

# ABSOLUTE MAXIMUM RATINGS(1)

Symbol	Description	Max.	Unit
VTERM(2)	Supply Voltage to Ground	– 0.5 to 4.6	V
VTERM(3)	DC Switch Voltage Vs	– 0.5 to 5.5	V
VTERM(3)	DC Input Voltage VIN	– 0.5 to 5.5	V
VAC	AC Input Voltage (pulse width ≤20ns)	- 3	V
Іоит	DC Output Current (max. current/pin)	120	mA
Tstg	Storage Temperature	-65 to +150	°C

## NOTES:

- Stresses greater than those listed under ABSOLUTE MAXIMUM RATINGS may
  cause permanent damage to the device. This is a stress rating only and functional
  operation of the device at these or any other conditions above those indicated in the
  operational sections of this specification is not implied. Exposure to absolute
  maximum rating conditions for extended periods may affect reliability.
- 2. Vcc terminals.
- 3. All terminals except Vcc.

# CAPACITANCE (TA = +25°C, f = 1MHz, VIN = 0V, VOUT = 0V)

Symbol	Parameter <sup>(1)</sup>	Тур.	Max.	Unit
CIN	Control Inputs	3	5	pF
CI/O	Quickswitch Channels (Switch OFF)	4	6	pF
CI/O	Quickswitch Channels (Switch ON)	8	12	pF

#### NOTE:

1. This parameter is guaranteed but not production tested.

# **PIN DESCRIPTION**

Pin Names	I/O	Description
xA1 - xA12	I/O	Bus A
xB1 - xB12	I/O	Bus B
10E - 20E	1	Data Select

# FUNCTION TABLE(1)

10E	20E	1Ax	2Ax	Function
L	L	1Вх	2Bx	1Ax to 1Bx, 2Ax to 2Bx
L	Н	1Bx	Z	1Ax to 1Bx
Н	L	Z	2Bx	2Ax to 2Bx
Н	Н	Z	Z	Disconnect

## NOTE:

- 1. H = HIGH Voltage Level
  - L = LOW Voltage Level
  - Z = High-Impedence

# DC ELECTRICAL CHARACTERISTICS OVER OPERATING RANGE(1)

Following Conditions Apply Unless Otherwise Specified:


Industrial: TA = -40°C to +85°C, VCC = 3.3V  $\pm 0.3$ V

Symbol	Parameter	Test Conditions			Min.	Typ. <sup>(1)</sup>	Max.	Unit
ViH	Input HIGH Voltage	Guaranteed Logic HI	GH	VCC = 2.3V  to  2.7V	1.7	_	1	V
		for Control Inputs		VCC = 2.7V  to  3.6V	2	_		
VIL	Input LOW Voltage	Guaranteed Logic HI	GH	VCC = 2.3V  to  2.7V	_	_	0.7	V
		for Control Inputs		VCC = 2.7V  to  3.6V	_	_	0.8	
lin	Input Leakage Current (Control Inputs)	0V ≤ ViN ≤ Vcc		_		±1	μΑ	
loz	Off-State Current (Hi-Z)	$0V \le VOUT \le 5V$ , Switches OFF		_		±1	μΑ	
loff	Data Input/Output Power Off Leakage	VIN or Vout 0V to 5\	/, Vcc = 0V		_		±1	μΑ
		Vcc = 2.3V	VIN = 0V	ION = 30mA	_	6	8	
Ron	Switch ON Resistance	(Typ. at Vcc = 2.5V)	VIN = 1.7V	ION = 15mA	_	7	9	Ω
		Vcc = 3V	VIN = 0V	ION = 30mA	_	4	6	
			VIN = 2.4V	ION = 15mA	_	5	8	

## NOTE:

1. Typical values are at Vcc = 3.3V and TA = 25°C, unless otherwise noted.

# TYPICAL ON RESISTANCE vs Vin AT Vcc = 3.3V

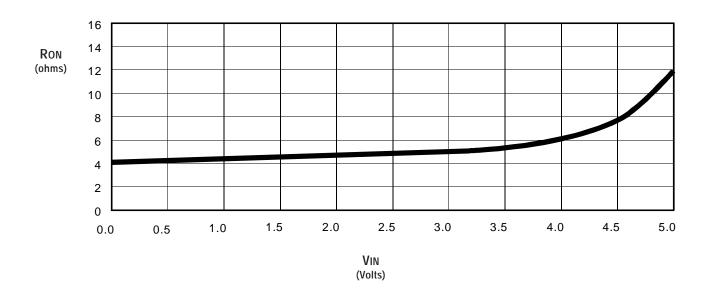


# POWER SUPPLY CHARACTERISTICS

Symbol	Parameter	Test Conditions <sup>(1)</sup>	Min.	Тур.	Max.	Unit
Icco	Quiescent Power Supply Current	Vcc = Max., Vin = GND or Vcc, f = 0	_	1.5	3	mA
∆lcc	Power Supply Current <sup>(2,3)</sup> per Input HIGH	Vcc = Max., Vin = 3V, f = 0 per Control Input	_	_	30	μA
ICCD	Dynamic Power Supply Current <sup>(4)</sup> Vcc = 3.3V, A and B Pins Open, Control Inputs		See Typical I	ccd vs Enable	Frequency gra	ph below
		Toggling @ 50% Duty Cycle				

## NOTES:

- 1. For conditions shown as Min. or Max., use the appropriate values specified under DC Electrical Characteristics.
- 2. Per input driven at the specified level. A and B pins do not contribute to Δlcc.
- 3. This parameter is guaranteed but not tested.
- 4. This parameter represents the current required to switch internal capacitance at the specified frequency. The A and B inputs do not contribute to the Dynamic Power Supply Current. This parameter is guaranteed but not production tested.

# TYPICAL ICCD vs ENABLE FREQUENCY CURVE AT Vcc = 3.3V

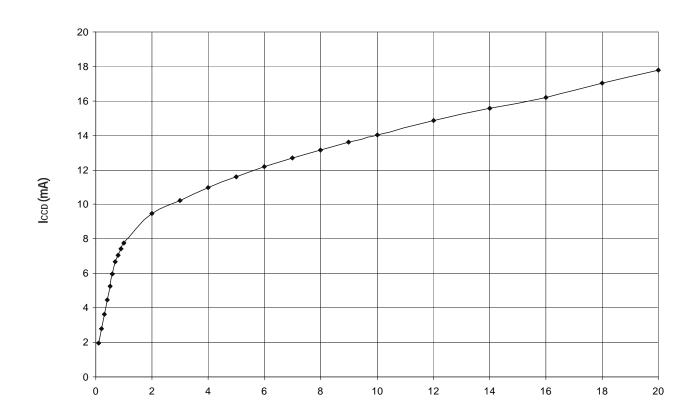

**ENABLE FREQUENCY (MHz)** 

# SWITCHING CHARACTERISTICS OVER OPERATING RANGE


 $T_A = -40^{\circ}C \text{ to } +85^{\circ}C$ 

		$Vcc = 2.5 \pm 0.2V^{(1)}$		$VCC = 3.3 \pm 0.3 V^{(1)}$		
Symbol	Parameter	Min. <sup>(4)</sup>	Max.	Min. <sup>(4)</sup>	Max.	Unit
<b>t</b> PLH	Data Propagation Delay <sup>(2,3)</sup>	_	0.2	_	0.2	ns
tphL	xAx to xBx or xBx to xAx					
tpzh	Switch Turn-On Delay	1.5	9	1.5	9	ns
tpzl	xOE to xAx or xBx					
tphz	Switch Turn-Off Delay	1.5	8.5	1.5	8.5	ns
tPLZ	xOE to xAx or xBx					
fxOE	Operating Frequency - Enable (2,5)	_	7.5	_	20	MHz


## NOTES:

- 1. See Test Conditions under TEST CIRCUITS AND WAVEFORMS.
- 2. This parameter is guaranteed but not production tested.
- 3. The bus switch contributes no propagation delay other than the RC delay of the ON resistance of the switch and the load capacitance. The time constant for the switch alone is of the order of 0.2ns at C<sub>L</sub> = 50pF. Since this time constant is much smaller than the rise and fall times of typical driving signals, it adds very little propagation delay to the system. Propagation delay of the bus switch, when used in a system, is determined by the driving circuit on the driving side of the switch and its interaction with the load on the driven side.
- 4. Minimums are guaranteed but not production tested.
- 5. Maximum toggle frequency for  $\overline{xOE}$  control input (pass voltage > Vcc, Vin = 5V, Rload > 1M $\Omega$ , no Cload).


# SOME APPLICATIONS FOR HOTSWITCH PRODUCTS

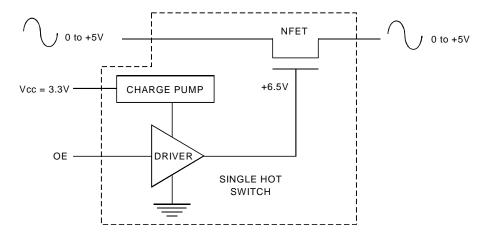

Rail-to-Rail Switching

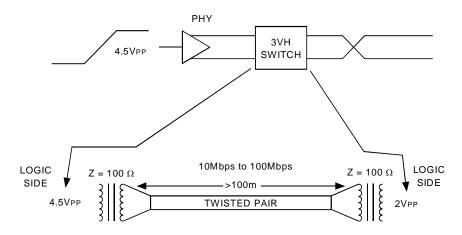


Fast Ethernet Data Switching (LAN Switch)

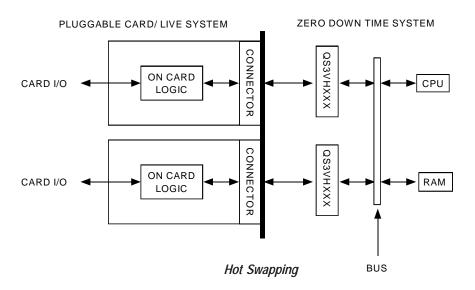

# TEST CIRCUITS AND WAVEFORMS

# **TEST CONDITIONS**

Symbol	$Vcc^{(1)}=3.3V\pm0.3V$	Vcc <sup>(2)</sup> = 2.5V ± 0.2V	Unit
VLOAD	6	2 x Vcc	V
VIH	3	Vcc	V
VT	1.5	Vcc/2	V
VLZ	300	150	mV
VHZ	300	150	mV
CL	50	30	pF

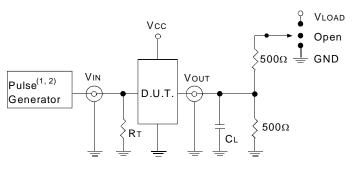

Test Circuits for All Outputs

## **DEFINITIONS:**

CL = Load capacitance: includes jig and probe capacitance.


RT = Termination resistance: should be equal to ZouT of the Pulse Generator.

#### NOTES:

- 1. Pulse Generator for All Pulses: Rate  $\leq$  1.0MHz: tF  $\leq$  2.5ns: tR  $\leq$  2.5ns.
- 2. Pulse Generator for All Pulses: Rate  $\leq$  1.0MHz; tF  $\leq$  2ns; tR  $\leq$  2ns.

#### VIH SAME PHASE VT INPUT TRANSITION 0V tphl ◀ tPLH VOH OUTPUT VT VOL tPLH **t**PHL VIHOPPOSITE PHASE VTINPUT TRANSITION 0V

Propagation Delay



## NOTE:


1. Diagram shown for input Control Enable-LOW and input Control Disable-HIGH.

## Enable and Disable Times

# **SWITCH POSITION**

Test	Switch
tplz/tpzl	Vload
tрнz/tpzн	GND
tpp	Open

# ORDERING INFORMATION

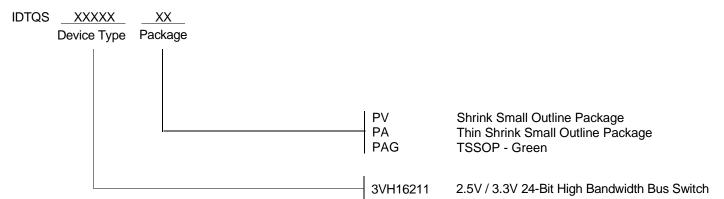



2975 Stender Way Santa Clara, CA 95054 for SALES:

800-345-7015 or 408-727-6116 fax: 408-492-8674 www.idt.com

for Tech Support: logichelp@idt.com (408) 654-6459