


## 3 TERMINAL 0.5A NEGATIVE VOLTAGE REGULATOR

### ■ DESCRIPTION

The UTC **79DXX** series of three-terminal negative regulators are available in TO-251 and TO-252 packages and with several fixed output voltage, making them useful in a wide range of application. Each type employs internal current limiting, thermal shut-down and safe area protection, making it essentially indestructible.

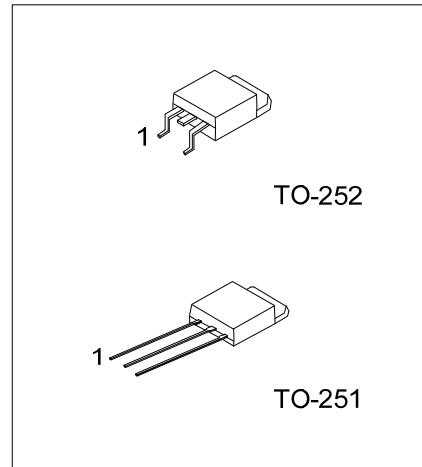

### ■ FEATURES

- \* Output current up to 0.5A
- \* -5V, -6V, -8V, -12V, -15V, -18V, -24V output voltage available
- \* Thermal overload protection
- \* Short circuit protection

### ■ ORDERING INFORMATION


Ordering Number		Package	Pin Assignment			Packing
Lead Free	Halogen Free		1	2	3	
79DxxL-TM3-T	79DxxG-TM3-T	TO-251	G	I	O	Tube
79DxxL-TN3-T	79DxxG-TN3-T	TO-252	G	I	O	Tube
79DxxL-TN3-R	79DxxG-TN3-R	TO-252	G	I	O	Tape Reel

Note: 1. xx: output voltage, refer to Marking Information


2. Pin Code: I: Input G: GND O: Output

 79DxxL-TM3-T	(1)Packing Type (2)Package Type (3)Lead Plating (4)Output Voltage Code	(1) T: Tube, R: Tape Reel (2) TM3: TO-251, TN3: TO-252 (3) L: Lead Free, G: Halogen Free (4) xx: refer to Marking Information
------------------	---	--

## ■ MARKING INFORMATION

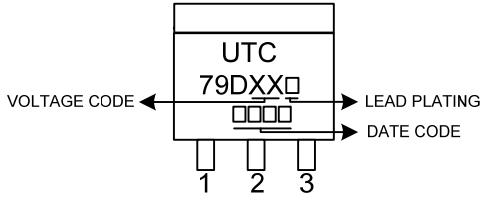PACKAGE	VOLTAGE CODE	MARKING
TO-251	05 : -5V 06 : -6V 08 : -8V 12 : -12V 15 : -15V 18 : -18V 24 : -24V	 <p>VOLTAGE CODE → Pin 2      LEAD PLATING → Pin 1      DATE CODE → Pin 3</p>
TO-252		

## ■ BLOCK DIAGRAM

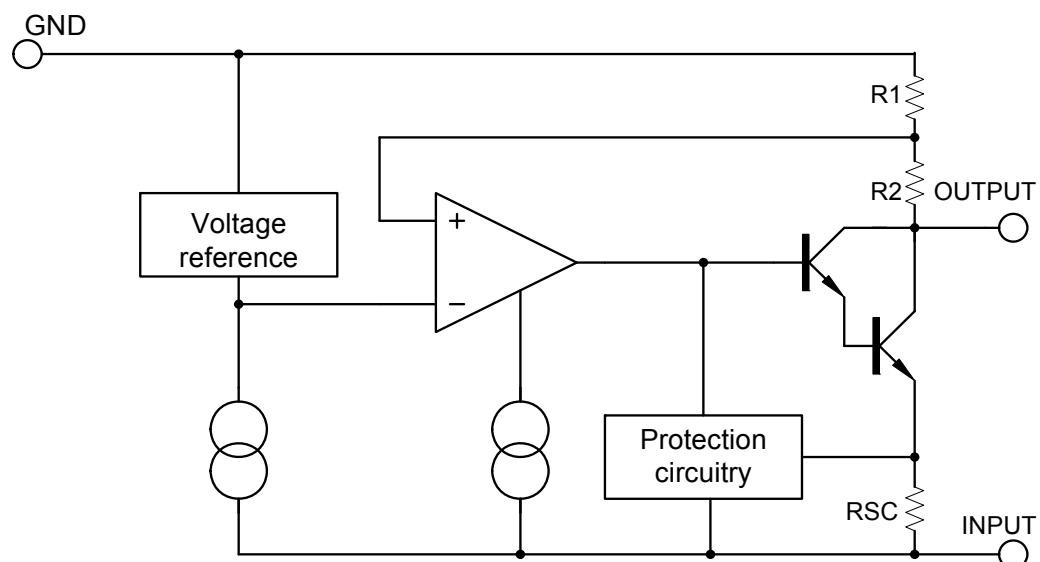

■ ABSOLUTE MAXIMUM RATINGS ( $T_A=25^\circ\text{C}$ )

PARAMETER		SYMBOL	RATINGS	UNIT
Input Voltage	$V_{OUT} = -5 \sim -18V$	$V_{IN}$	-35	V
	$V_{OUT} = -20 \sim -24V$		-40	V
Operating Temperature		$T_{OPR}$	-40 ~ +85	$^\circ\text{C}$
Storage Temperature		$T_{STG}$	-65 ~ +150	$^\circ\text{C}$

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ THERMAL DATA

PARAMETER	SYMBOL	RATINGS	UNIT
Thermal Resistance Junction-Air	$\theta_{JA}$	65	$^\circ\text{C/W}$
Thermal Resistance Junction-Cases	$\theta_{JC}$	5	$^\circ\text{C/W}$

■ ELECTRICAL CHARACTERISTICS ( $0 < T_J < 125^\circ\text{C}$ , unless otherwise specified)

**FOR 79D05** ( $V_{IN}=-10V$ ,  $I_{OUT}=500mA$ ,  $C_l=33\mu\text{F}$ ,  $C_o=1\mu\text{F}$ )

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	$V_{OUT}$	$T_J=25^\circ\text{C}$	-4.80	-5.0	-5.20	V
		$5.0\text{mA} < I_{OUT} < 0.5\text{A}$ , $P_{OUT} < 15\text{W}$ $V_{IN}=-7V \sim -20V$	-4.75		-5.25	V
Line Regulation	$\Delta V_{OUT}$	$T_J=25^\circ\text{C}$ , $V_{IN}=-7V \sim -25V$		10	100	mV
		$T_J=25^\circ\text{C}$ , $V_{IN}=-8V \sim -12V$				mV
Load Regulation	$\Delta V_{OUT}$	$T_J=25^\circ\text{C}$ , $I_{OUT}=5.0\text{mA} \sim 0.5\text{A}$		10	100	mV
		$T_J=25^\circ\text{C}$ , $I_{OUT}=5.0\text{mA} \sim 200\text{mA}$		3	50	mV
Quiescent Current	$I_Q$	$T_J=25^\circ\text{C}$		4.3	8	mA
Quiescent Current Change	$\Delta I_Q$	$I_{OUT}=5\text{mA} \sim 0.5\text{A}$		0.05	0.5	mA
		$V_{IN}=-7V \sim -25V$		0.1	1.3	mA
Temperature Coefficient of $V_{OUT}$	$\Delta V_{OUT}/\Delta T$	$I_{OUT}=5\text{mA}$		-0.4		$\text{mV}/^\circ\text{C}$
Output Noise Voltage	$V_N$	$f=10\text{Hz} \sim 100\text{kHz}$ , $T_a=25^\circ\text{C}$		100		$\mu\text{V}$
Ripple Rejection	RR	$f=120\text{Hz}$ , $V_{IN}=-8V \sim -18V$	54	60		dB
Dropout Voltage	$V_D$	$I_{OUT}=1.0\text{A}$ , $T_J=25^\circ\text{C}$		2		V

**FOR 79D06** ( $V_{IN}=-11V$ ,  $I_{OUT}=500mA$ ,  $C_l=2.2\mu\text{F}$ ,  $C_o=1\mu\text{F}$ )

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	$V_{OUT}$	$T_J=25^\circ\text{C}$	-5.76	-6.0	-6.24	V
		$5.0\text{mA} < I_{OUT} < 0.5\text{A}$ , $P_{OUT} < 15\text{W}$ $V_{IN}=-8V \sim -21V$	-5.70		-6.30	V
Line Regulation	$\Delta V_{OUT}$	$T_J=25^\circ\text{C}$ , $V_{IN}=-8V \sim -25V$		10	120	mV
		$T_J=25^\circ\text{C}$ , $V_{IN}=-9V \sim -13V$		5	60	mV
Load Regulation	$\Delta V_{OUT}$	$T_J=25^\circ\text{C}$ , $I_{OUT}=5.0\text{mA} \sim 0.5\text{A}$		10	120	mV
		$T_J=25^\circ\text{C}$ , $I_{OUT}=5.0\text{mA} \sim 200\text{mA}$		3	60	mV
Quiescent Current	$I_Q$	$T_J=25^\circ\text{C}$		4.3	8	mA
Quiescent Current Change	$\Delta I_Q$	$I_{OUT}=5\text{mA} \sim 0.5\text{A}$			0.5	mA
		$V_{IN}=-8V \sim -25V$			1.3	mA
Temperature Coefficient of $V_{OUT}$	$\Delta V_{OUT}/\Delta T$	$I_{OUT}=5\text{mA}$		-0.5		$\text{mV}/^\circ\text{C}$
Output Noise Voltage	eN	$f=10\text{Hz} \sim 100\text{kHz}$ , $T_a=25^\circ\text{C}$		130		$\mu\text{V}$
Ripple Rejection	RR	$f=120\text{Hz}$ , $V_{IN}=-9V \sim -19V$	54	60		dB
Dropout Voltage	$V_D$	$I_{OUT}=0.5\text{A}$ , $T_J=25^\circ\text{C}$		2		V

## ■ ELECTRICAL CHARACTERISTICS(Cont.)

FOR 79D08 ( $V_{IN}=-14V$ ,  $I_{OUT}=500mA$ ,  $C_i=2.2\mu F$ ,  $C_o=1\mu F$ )

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	$V_{OUT}$	$T_J=25^\circ C$	-7.68	-8.0	-8.32	V
		$5.0mA < I_{OUT} < 0.5A, P_{OUT} < 15W$ $V_{IN} = -10.5V \sim -23V$	-7.60		-8.40	V
Line Regulation	$\Delta V_{OUT}$	$T_J=25^\circ C, V_{IN} = -10.5V \sim -25V$		10	100	mV
		$T_J=25^\circ C, V_{IN} = -11.5V \sim -17V$		5	80	mV
Load Regulation	$\Delta V_{OUT}$	$T_J=25^\circ C, I_{OUT} = 5.0mA \sim 0.5A$		12	160	mV
		$T_J=25^\circ C, I_{OUT} = 5.0mA \sim 200mA$		4	80	mV
Quiescent Current	$I_Q$	$T_J=25^\circ C$		4.3	8	mA
Quiescent Current change	$\Delta I_Q$	$I_{OUT} = 5mA \sim 0.5A$		0.05	0.5	mA
		$V_{IN} = -11.5V \sim -25V$		0.1	1.0	mA
Temperature Coefficient of $V_{OUT}$	$\Delta V_{OUT}/\Delta T$	$I_{OUT} = 5mA$		-0.6		mV/°C
Output Noise Voltage	eN	f=10Hz ~ 100kHz, Ta=25°C		175		μV
Ripple Rejection	RR	f=120Hz, $V_{IN} = -11.5V \sim -21.5V$	54	60		dB
Dropout Voltage	$V_D$	$I_{OUT} = 0.5A, T_J = 25^\circ C$		2		V

FOR 79D09 ( $V_{IN}=-15V$ ,  $I_{OUT}=500mA$ ,  $C_i=2.2\mu F$ ,  $C_o=1\mu F$ )

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	$V_{OUT}$	$T_J=25^\circ C$	-8.64	-9.0	-9.36	V
		$5.0mA < I_{OUT} < 0.5A, P_{OUT} < 15W$ $V_{IN} = -11.5V \sim -24V$	-8.55		-9.45	V
Line regulation	$\Delta V_{OUT}$	$T_J=25^\circ C, V_{IN} = -11.5V \sim -25V$		10	180	mV
		$T_J=25^\circ C, V_{IN} = -12.5V \sim -18V$		5	90	mV
Load Regulation	$\Delta V_{OUT}$	$T_J=25^\circ C, I_{OUT} = 5.0mA \sim 0.5A$		12	180	mV
		$T_J=25^\circ C, I_{OUT} = 5.0mA \sim 200mA$		4	90	mV
Quiescent Current	$I_Q$	$T_J=25^\circ C$		4.3	8	mA
Quiescent Current Change	$\Delta I_Q$	$I_{OUT} = 5mA \sim 0.5A$		0.05	0.5	mA
		$V_{IN} = -11.5V \sim -26V$		0.1	1.0	mA
Temperature Coefficient of $V_{OUT}$	$\Delta V_{OUT}/\Delta T$	$I_{OUT} = 5mA$		-0.6		mV/°C
Output Noise Voltage	eN	f=10Hz ~ 100kHz, Ta=25°C		175		μV
Ripple Rejection	RR	f=120Hz $V_{IN} = -12.5V \sim -22.5V$	54	60		dB
Dropout Voltage	$V_D$	$I_{OUT} = 0.5A, T_J = 25^\circ C$		2		V

FOR 79D12 ( $V_{IN}=-18V$ ,  $I_{OUT}=500mA$ ,  $C_i=2.2\mu F$ ,  $C_o=1\mu F$ )

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	$V_{OUT}$	$T_J=25^\circ C$	-11.52	-12.0	-12.48	V
		$5.0mA < I_{OUT} < 0.5A, P_{OUT} < 15W$ $V_{IN} = -14.5V \sim -27V$	-11.40		-12.60	V
Line Regulation	$\Delta V_{OUT}$	$T_J=25^\circ C, V_{IN} = -14.5V \sim -30V$		12	240	mV
		$T_J=25^\circ C, V_{IN} = -16V \sim -22V$		6	120	mV
Load Regulation	$\Delta V_{OUT}$	$T_J=25^\circ C, I_{OUT} = 5.0mA \sim 0.5A$		12	240	mV
		$T_J=25^\circ C, I_{OUT} = 5.0mA \sim 200mA$		4	120	mV
Quiescent Current	$I_Q$	$T_J=25^\circ C$		4.3	8	mA
Quiescent Current Change	$\Delta I_Q$	$I_{OUT} = 5mA \sim 0.5A$		0.05	0.5	mA
		$V_{IN} = -14.5V \sim -30V$		0.1	1.0	mA
Temperature Coefficient of $V_{OUT}$	$\Delta V_{OUT}/\Delta T$	$I_{OUT} = 5mA$		-0.8		mV/°C
Output Noise Voltage	eN	f=10Hz ~ 100kHz, Ta=25°C		200		μV
Ripple Rejection	RR	f=120Hz $V_{IN} = -15V \sim -25V$	54	60		dB
Dropout Voltage	$V_D$	$I_{OUT} = 0.5A, T_J = 25^\circ C$		2		V

## ■ ELECTRICAL CHARACTERISTICS(Cont.)

**FOR 79D15** ( $V_{IN}=-23V$ ,  $I_{OUT}=500mA$ ,  $C_i=2.2\mu F$ ,  $Co=1\mu F$ )

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	$V_{OUT}$	$T_J=25^\circ C$	-14.40	-15.0	-15.60	V
		5.0mA < $I_{OUT}$ < 0.5A, $P_{OUT} < 15W$ $V_{IN}=-17.5V \sim -30V$	-14.25		-15.75	V
Line Regulation	$\Delta V_{OUT}$	$T_J=25^\circ C$ , $V_{IN}=-17.5V \sim -30V$		12	300	mV
		$T_J=25^\circ C$ , $V_{IN}=-20V \sim -26V$		6	150	mV
Load Regulation	$\Delta V_{OUT}$	$T_J=25^\circ C$ , $I_{OUT}=5.0mA \sim 0.5A$		12	300	mV
		$T_J=25^\circ C$ , $I_{OUT}=5.0mA \sim 200mA$		4	150	mV
Quiescent Current	$I_Q$	$T_J=25^\circ C$		4.3	8	mA
Quiescent Current Change	$\Delta I_Q$	$I_{OUT}=5mA \sim 0.5A$		0.05	0.5	mA
		$V_{IN}=-17.5V \sim -30.5V$		0.1	1.0	mA
Temperature Coefficient of $V_{OUT}$	$\Delta V_{OUT}/\Delta T$	$I_{OUT}=5mA$		-0.9		mV/°C
Output Noise Voltage	eN	f=10Hz ~ 100kHz, Ta=25°C		250		μV
Ripple Rejection	RR	f=120Hz, $V_{IN}=-18.5V \sim -28.5V$	54	60		dB
Dropout Voltage	$V_d$	$I_{OUT}=0.5A$ , $T_J=25^\circ C$		2		V

**FOR 79D18** ( $V_{IN}=-27V$ ,  $I_{OUT}=500mA$ ,  $C_i=2.2\mu F$ ,  $Co=1\mu F$ )

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	$V_{OUT}$	$T_J=25^\circ C$	-17.28	-18.0	-18.72	V
		5.0mA < $I_{OUT}$ < 0.5A, $P_{OUT} < 15W$ $V_{IN}=-21V \sim -33V$	-17.10		-18.90	V
Line Regulation	$\Delta V_{OUT}$	$T_J=25^\circ C$ , $V_{IN}=-21V \sim -33V$		15	360	mV
		$T_J=25^\circ C$ , $V_{IN}=-24V \sim -30V$		8	180	mV
Load Regulation	$\Delta V_{OUT}$	$T_J=25^\circ C$ , $I_{OUT}=5.0mA \sim 0.5A$		15	360	mV
		$T_J=25^\circ C$ , $I_{OUT}=5.0mA \sim 200mA$		5.0	180	mV
Quiescent Current	$I_Q$	$T_J=25^\circ C$		4.3	8	mA
Quiescent Current Change	$\Delta I_Q$	$I_{OUT}=5mA \sim 0.5A$			0.5	mA
		$V_{IN}=-21V \sim -32V$			1.0	mA
Temperature Coefficient of $V_{OUT}$	$\Delta V_{OUT}/\Delta T$	$I_{OUT}=5mA$		-1		mV/°C
Output Noise Voltage	eN	f=10Hz ~ 100kHz, Ta=25°C		300		μV
Ripple Rejection	RR	f=120Hz, $V_{IN}=-22V \sim -32V$	54	60		dB
Dropout Voltage	$V_d$	$I_{OUT}=0.5A$ , $T_J=25^\circ C$		2		V

**FOR 79D24** ( $V_{IN}=-33V$ ,  $I_{OUT}=500mA$ ,  $C_i=2.2\mu F$ ,  $Co=1\mu F$ )

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	$V_{OUT}$	$T_J=25^\circ C$	-23.04	-24.0	-24.96	V
		5.0mA < $I_{OUT}$ < 0.5A, $P_{OUT} < 15W$ $V_{IN}=-27V \sim -38V$	-22.80		-25.20	V
Line Regulation	$\Delta V_{OUT}$	$T_J=25^\circ C$ , $V_{IN}=-27V \sim -38V$		15	480	mV
		$T_J=25^\circ C$ , $V_{IN}=-30V \sim -36V$		8	240	mV
Load Regulation	$\Delta V_{OUT}$	$T_J=25^\circ C$ , $I_{OUT}=5.0mA \sim 0.5A$		15	480	mV
		$T_J=25^\circ C$ , $I_{OUT}=5.0mA \sim 200mA$		5.0	240	mV
Quiescent Current	$I_Q$	$T_J=25^\circ C$		4.3	8	mA
Quiescent Current Change	$\Delta I_Q$	$I_{OUT}=5mA \sim 0.5A$			0.5	mA
		$V_{IN}=-27V \sim -38V$			1.0	mA
Temperature Coefficient of $V_{OUT}$	$\Delta V_{OUT}/\Delta T$	$I_{OUT}=5mA$		-1		mV/°C
Output Noise Voltage	eN	f=10Hz ~ 100kHz, Ta=25°C		400		μV
Ripple Rejection	RR	f=120Hz, $V_{IN}=-28V$ to $-38V$	54	60		dB
Dropout Voltage	$V_d$	$I_{OUT}=0.5A$ , $T_J=25^\circ C$		2		V

## ■ APPLICATION CIRCUITS

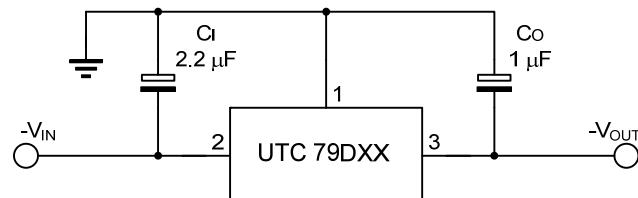


Fig.1 Fixed output regulator

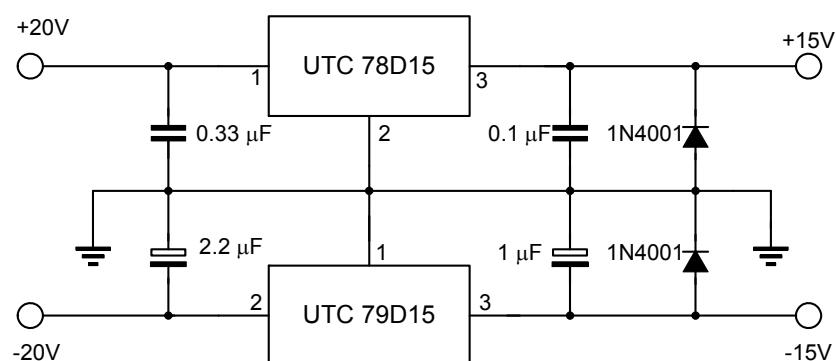
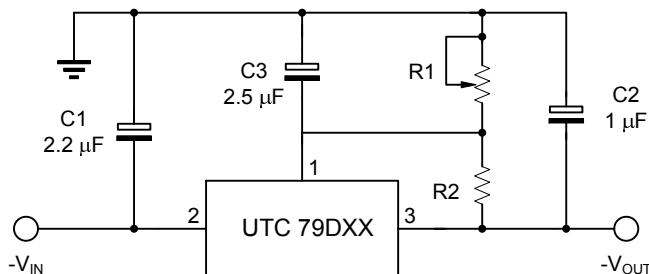
Fig.2 Split power supply ( $\pm 15V$ , 0.5A)

Fig.3 Circuit for increasing output voltage

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.