

KR Electronics, Inc.

General Description

KR Electronics part number 3036 is a 160 MHz Notch Filter. Other center frequencies and bandwidths available. Please consult the factory.

Features

- 160 MHz Notch Frequency
- 40 MHz typical 3 dB Bandwidth
- 50 Ω Source and Load
- SMA Connectors

Typical Performance

Overall Response (10 dB/div)



KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001


Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982

KR Electronics 3036

Specifications

Parameter	Specification
Filter type	Notch
Notch Frequency	160 MHz
Rejection at Notch Frequency	60 dB min
Typical 1 dB Bandwidth	50 MHz
Typical 3 dB Bandwidth	40 MHz
Typical 40 dB Bandwidth	9.8 MHz
Typical 50 dB Bandwidth	6.6 MHz
Source and Load	50 Ω

Physical Dimensions

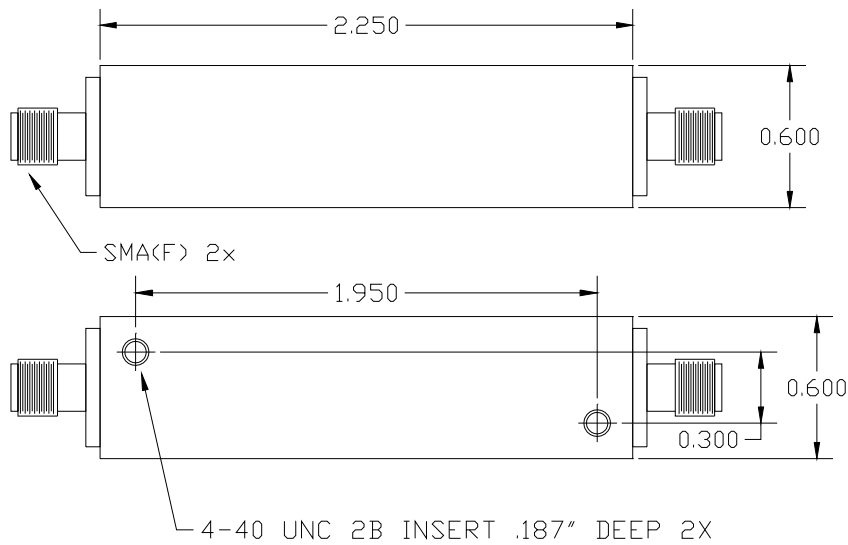

Notes:

1. Dimensions in inches
2. Rectangular case

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001

Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982