



## **MS** Series


The MS series of cable end float switches are designed for controlling levels in large tanks, cisterns or reservoirs and can be directly installed on submersible pumps. The casing is manufactured in blow moulded Polyethylene (HDPE), with 5m PVC cable with protective earth conductor as standard. The switching element is a microswitch, with UL, VDE and CENELEC approvals, activated by a moving stainless steel ball and having an electrical life of 200,000 operations. Non-hygroscopic closed-cell expanded polyurethane is injected around the switch housing within the outer casing, hermetically sealing the unit. It is capable of working down to 100 metres depth in water.





Part No.	Contact Form	Switching Current (Amps)		nt Max.	Power Rating Max.		Switching Voltage Max.		Cable Matl.	lLength	Body Matl.	Temp. Range		Max. Pressure
		Resistive	AC	Inductive	AC (VA)	DC (W)	AC	DC	iviati.	*	iviati.	°C	°F	i ressure
MS10A	N/O	10	4	1	750	180	250	110	PVC	5m	HDPE	0-55	32-131	10 bar
MS10AU	N/O	10	4	1	750	180	250	110	PUR	5m	HDPE	0-55	32-131	10 bar
MS10B	N/C	10	4	1	750	180	250	110	PVC	5m	HDPE	0-55	32-131	10 bar
MS10BU	N/C	10	4	1	750	180	250	110	PUR	5m	HDPE	0-55	32-131	10 bar
MS10C	C/O	10	4	1	750	180	250	110	PVC	5m	HDPE	0-55	32-131	10 bar
MS10CU	C/O	10	4	1	750	180	250	110	PUR	5m	HDPE	0-55	32-131	10 bar
MS20A	N/O	20	8	2	1500	360	250	110	PVC	5m	HDPE	0-55	32-131	10 bar
MS20AU	N/O	20	8	2	1500	360	250	110	PUR	5m	HDPE	0-55	32-131	10 bar
MS20B	N/C	20	8	2	1500	360	250	110	PVC	5m	HDPE	0-55	32-131	10 bar
MS20BU	N/C	20	8	2	1500	360	250	110	PUR	5m	HDPE	0-55	32-131	10 bar
MS20C	C/O	20	8	2	1500	360	250	110	PVC	5m	HDPE	0-55	32-131	10 bar
MS20CU	C/O	20	8	2	1500	360	250	110	PUR	5m	HDPE	0-55	32-131	10 bar

<sup>\* =</sup> protective earth wire included

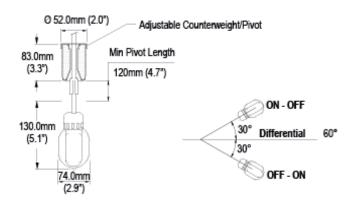

- Direct power switching
- Cable mounting
- 100 metre depth capability

Cynergy3 Components Ltd 7 Cobham Road Ferndown Industrial Estate Wimborne Dorset BH21 7PE Tel: +44 (0) 1202 897969 sales@cynergy3.com

www.cynergy3.com

ISO 9001CERTIFIED

MS 201

## **MS** Series



