

0 dB Fixed Attenuator, QMA Male to QMA Female Rated to 1 Watt Up to 6 GHz



RF Fixed Attenuators Technical Data Sheet

PE7AP1002-0

Features

- Bidirectional
- DC to 6 GHz Frequency Range
- Attenuation 0 ± 0.5 dB

- Max Power 2 Watts (CW)
- VSWR < 1.25:1

Applications

- Instrumentation
- Precision measurements
- Prototyping and characterization
- · Production systems

Description

Pasternack carries a wide range of fixed attenuators with a broad selection of attenuation levels, frequency ranges, and power dissipation ranges. RF microwave attenuators (also known as RF pads) lower the amplitude of a signal (attenuate) a known amount and can be used in a wide variety of applications. These attenuator pads are used when a signal needs to be reduced to protect measurement equipment or other circuitry, to extend the range of power meters and amplifiers, and to impedance match circuits by reducing the VSWR seen by adjacent components. RF attenuators can prevent signal overload in amplifiers, receivers and detectors, adjusting the signal level to a range that is optimal.

Few RF components are as commonly used as fixed coaxial attenuators, and Pasternack carries one of the largest in-stock varieties and ships them same day. The 0 dB Fixed Attenuator PE7AP1002-0 is rated to 1 Watt and operates from DC to 6 GHz. The versatile coaxial package uses QMA male to QMA female connectors and is also REACH and RoHS compliant.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		6	GHz
Impedance		50		Ohms
Nominal Attenuation		0		dB
Input Power, CW			1	Watts
Input Power, Peak			100	Watts
1 µs, 1%				

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Range	DC to 2	2 to 6				GHz
VSWR, Max	1.2:1	1.3:1				
Attenuation Accuracy, Typ	±0.3	±0.5				dB
, , , , , , , , , , , , , , , , , , , ,						

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 0 dB Fixed Attenuator, QMA Male to QMA Female Rated to 1 Watt Up to 6 GHz PE7AP1002-0



Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623 **Phone:** (866) 727-8376 or (949) 261-1920 • **Fax:** (949) 261-7451



0 dB Fixed Attenuator, QMA Male to QMA Female Rated to 1 Watt Up to 6 GHz



RF Fixed Attenuators Technical Data Sheet

PE7AP1002-0

Mechanical Specifications

Size

Configuration

Design Fixed

Package Style Connectorized

Connectors

Description	Connector 1	Connector 2		
Туре	QMA Male	QMA Female		

Environmental Specifications

Temperature

Operating Range -40 to +85 deg C Storage Range -40 to +85 deg C

Ingress Protection (IP) Rating **IP67**

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 0 dB Fixed Attenuator, QMA Male to QMA Female Rated to 1 Watt Up to 6 GHz PE7AP1002-0






0 dB Fixed Attenuator, QMA Male to QMA Female Rated to 1 Watt Up to 6 GHz



RF Fixed Attenuators Technical Data Sheet

PE7AP1002-0

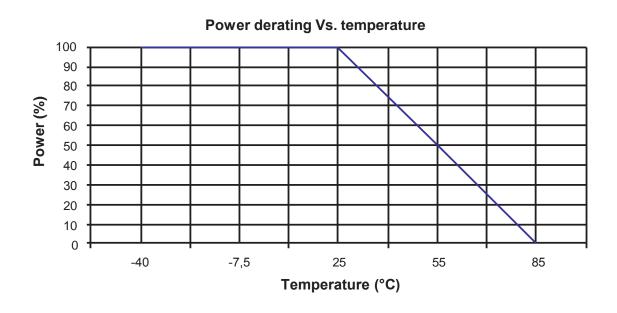

0 dB Fixed Attenuator, QMA Male to QMA Female Rated to 1 Watt Up to 6 GHz from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 0 dB Fixed Attenuator, QMA Male to QMA Female Rated to 1 Watt Up to 6 GHz PE7AP1002-0

URL: https://www.pasternack.com/0db-fixed-qma-male-qma-female-1-watt-attenuator-pe7ap1002-0-p.aspx



PE7AP1002-0 CAD Drawing

0 dB Fixed Attenuator, QMA Male to QMA Female Rated to 1 Watt Up to 6 GHz

