# BXF300 Series



### 150-198W Wide Input DC/DC Converters



Industry standard footprint

- · Adjustable output voltage with output currents of 60A
- No minimum load required
- 2:1 input range for battery powered applications
- Undervoltage lockout (UVLO)
- Overvoltage and overcurrent protection
- · Synchronizable and parallelable with load sharing
- Overtemperature and short circuit protection
- Current monitor and power good signal
- Remote ON/OFF

BXF300 Series high power density DC/DC converters can provide up to 60A output current and have an industry-standard footprint, measuring just 2.40 x 4.60 x 0.52 inches. The converters are equally suitable for new designs or as replacement power sources in existing equipment. BXF300 Series converters are designed specifically for redundant and distributed power systems in the computer and telecommunications sectors, but their feature-rich specifications make them suitable for a very wide range of applications. Using Bellcore 332, the MTBF is over 1,000,000 hours. Aluminium baseplate technology and four threaded M3 inserts make heatsink attachment and thermal management easy. The BXF300 Series is approved by UL, CSA and VDE.





2 YEAR WARRANTY

SPECIFICATIONS

### All specifications are typical at nominal input, full load at 25°C unless otherwise stated

### OUTPUT SPECIFICATIONS

Voltage adjustability	N	lodel specific
Set point accuracy	±0.5% typ.,	±1.6% max.
Line regulation	Low line to high line	±0.10% typ.
Load regulation	Full load to min. load	±0.15% typ.
Minimum load		0%
Overshoot		0V
Undershoot	At turn-on and turn-off	0V
Ripple and noise	5Hz to 20MHz (See Note 1)	20mV
Temperature coefficient		±0.01%/°C
Transient response	Recovery time (See Note 2) Peak deviation	500µs 500mV
Remote sense 0.5VDC transmission line drop compensation		

### INPUT SPECIFICATIONS

Input voltage range	48Vin nominal	36 to 75VDC
Input current	No load Remote OFF	100mA max. 20mA max.
Input current (max.)	(See Note 3)	9A max.
Input reflected ripple	(See Note 5)	26mA pk-pk
Active low remote ON/O Logic compatibility ON OFF	FF	(See Note 7) 1.2VDC max. Open circuit
Undervoltage lockout	48Vin: power up 48Vin: power down	34.8V 33.1V
Start-up time (See Note 6)	Power up Remote ON/OFF	15ms 13ms

EMC CHARACTERISTI	CS		
Conducted emissions (See Note 8)	Bellcore 332 FCC part 15 EN55022, CISP	Level A Level A R22 Level A	
GENERAL SPECIFICAT	IONS		
Efficiency		See table	
Isolation voltage	Input/case Input/output Output/case	1500VDC 1500VDC 1500VDC	
Switching frequency	Fixed	850kHz typ.	
Approvals and standards (See Note 4)	VDE0805, EN60950, IEC950 UL1950, CSA C22.2 No. 950		
Case material		Aluminium baseplate and plastic casing	
Material flammability		UL94V-0	
Weight		200g (7.06oz)	
MTBF	Bellcore 332 MIL-HDBK-217 @ 40°C, 100%		
ENVIRONMENTAL SPE	CIFICATIONS		
Thermal performance	Operating case	temp40°C to +100°C -55°C to +125°C	

mermai performance	Non-operating	-55°C to +125°C
Altitude	Operating Non-operating	10,000 feet max. 40,000 feet max.
Vibration	5Hz to 500Hz	2.4G rms (approx.)

## **BXF300 Series** Single output



DC/DC CONVERTERS

150-198W Wide Input DC/DC Converters

For the most current data and application support visit www.artesyn.com/powergroup/products.htm

OUTPUT POWER	INPUT	OVP	OUTPUT	INPUT CURRENT	OUTPUT CURRENT	EFFICIENCY	REGUL	ATION	MODEL
(MAX.)	VOLTAGE		VOLTAGE	(MAX. LOAD)	(MAX.)	(TYP.)	LINE	LOAD	NUMBER <sup>(7)</sup>
198W	48VDC	3.80VDC	3.3V	5.2A	60A	79%	±0.10%	±0.15%	BXF300-48S3V3L
150W	48VDC	2.88VDC	2.5V	4.1A	60A	77%	±0.10%	±0.15%	BXF300-48S2V5L

### Notes

- 1 Measured with 10µF tantalum capacitor and 1µF ceramic capacitor across the output.
- lout = Inom; delta lout = ±25% lout (max), di/dt = 1A/µs. 2
- Input fusing is required based on surge and maximum input current. 3 This product is only for inclusion by professional installers within other 4
- equipment and must not be operated as a stand alone product. 5 Input reflected ripple current test set-up uses a Pi filter; 220µF, 12µH, 100µF.
- Start-up into resistive load. 6
- Active high remote on/off is available (standard product is active low), designate with the suffix 'H' e.g. BXF300-48S3V3H. Units should be characterised within systems. External components and 7
- 8 filtering required.

PROTECTION	
Short circuit protection	Continuous, automatic recovery
Overvoltage protection	Latching
Undervoltage protection	Non-latching
Thermal protection	110°C baseplate, automatic recovery
TELECOM SPECIFICATION	

Central office interface A

ETS300-132-2

2

PIN CONNECTIONS				
PIN NUMBER	FEATURE			
1	Power Good			
2	Current Monitor			
3	Parallel			
4	Trim Adjust			
5	+ Sense			
6	- Sense			

## **EXTERNAL OUTPUT TRIMMING**

Output can be externally trimmed by using the method shown.	RT1 OR TRIM VP TRIM OR RT2 DOWN
---	--

International Safety Standard Approvals



VDE0805/EN60950/IEC950 File No. 10401-3336-0148

CUL1950 File No. E136005

CSA C22.2 No. 950 File No. LR41062C

# BXF300 Series



3


DC/DC CONVERTERS


150-198W Wide Input DC/DC Converters

For the most current data and application support visit www.artesyn.com/powergroup/products.htm

### Mechanical notes

- 1 All dimensions in INCHES (mm).
- 2 Tolerance: x.xx ±0.02in. (0.51mm). x.xxx ±0.010in. (0.254mm).

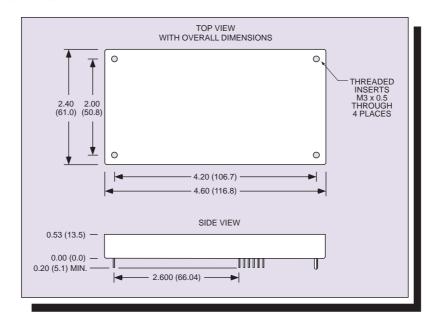

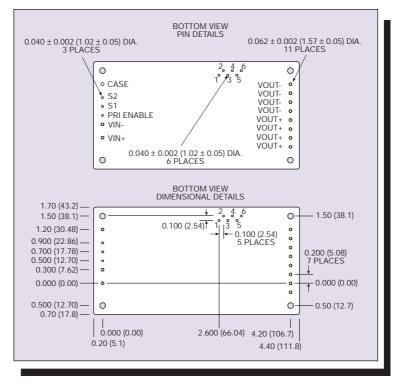

Data Sheet © Artesyn Technologies® 2002

The information and specifications contained in this data sheet are believed to be correct at time of publication. However, Artesyn Technologies accepts no responsibility for consequences arising from printing errors or inaccuracies. Specifications are subject to change without notice. No rights under any patent accompany the sale of any such product(s) or information contained herein.

Please consult our website for the following items: Application Note