### Voltage Variable Absorptive Attenuator, 800 - 1000 MHz



Rev. V9

#### Features

- Input IP3: +35 dBm Min. (Full Attenuation Range)
- Input IP3 is 15 -20 dB Better Than GaAs
- Linear Operation: +20 dBm Typ.
- 38 dB Dynamic Range (With 30 mA Bias Current)
- Single Control Voltage
- 50 ohm Impedance
- Linear Driver, DR65-0002, Available
- Test Boards are Available
- Tape and Reel Packaging Available
- SOW-16 Package

#### Description


M/A-COM's AT10-0009 is a PIN diode based voltage variable attenuator. This device is in a SOW-16, wide body plastic surface mount package. These attenuators have linear operating power and input intercept point levels 15 - 20 dB better than GaAs FET MMIC voltage variable attenuators. They are ideally suited for use where low distortion, high linear operating power and high dynamic range are required. These devices are optimized for the GSM frequency band, but exhibit excellent performance and repeatability over the entire specified frequency band. The AT10-0009 is ideally suited for wireless communications systems.

#### **Ordering Information**

Part Number	Package
AT10-0009	Bulk Packaging
AT10-0009TR	1000 piece reel
AT10-0009-TB	Sample Test Board
DR65-0002-TBG	Unit with Driver on Test Board

Note: Reference Application Note M513 for reel size information.

#### **Functional Schematic**

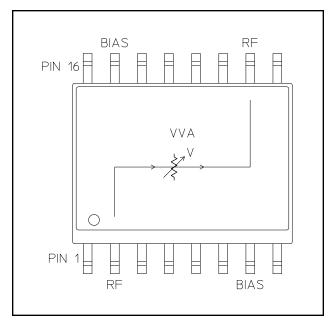

### **Pin Configuration**

Pin No.	Function	Pin No.	Function
1	GND	9	GND
2	RF	10	RF
3	GND	11	GND
4	GND	12	GND
5	GND	13	GND
6	GND	14	GND
7	Bias <sup>1</sup>	15	Bias <sup>1</sup>
8	GND	16	GND

1. Bias currents may be applied to pin 7 or 15. The unused pin should be isolated.

 PRELIMINARY: Data Sheets contain information regarding a product M/A-COM Technology
 Visit wv

 Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available.
 M/A-COM Technology
 Visit wv

 Commitment to produce in volume is not guaranteed.
 M/A-COM Technology
 M/A-COM Technology
 M/A-COM Technology

M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.

<sup>1</sup> 

ADVANCED: Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed. **PRFI IMINARY**. Data Sheets contain information reparding a product M/A-COM Technology.

<sup>•</sup> North America Tel: 800.366.2266 • Europe Tel: +353.21.244.6400

India Tel: +91.80.4155721
 China Tel: +86.21.2407.1588
 Visit www.macomtech.com for additional data sheets and product information.



# Voltage Variable Absorptive Attenuator, 800 - 1000 MHz

Rev. V9

# Electrical Specifications: $T_A = 25^{\circ}C$ , $Z_0 = 50\Omega$

Parameter	Test Conditions	Frequency	Units	Min	Тур	Max
Insertion Loss	0 volts	800-1000 MHz 925 - 960 MHz	dB dB		3.5 3.3	4.2 3.9
Attenuation (Above Loss)	12 mA bias current	800-1000 MHz 925 - 960 MHz	dB dB	30 33	- 38	_
Attenuation Flatness	0 to 30 dB attenuation	800-1000 MHz 925 - 960 MHz	dB dB		1.5 0.4	2.5 0.8
VSWR	0 to 30 dB attenuation	800-1000 MHz 925 - 960 MHz	Ratio Ratio		1.6:1 1.4:1	2.0:1 1.7:1
Switching Speed	50% Control to 90%/10% RF	800-1000 MHz	μs	_	-	10.0
Linear Operation	-	800-1000 MHz	dBm	_	+20	_
Input IP <sub>3</sub>	Two-tone inputs up to +10 dBm	800-1000 MHz	dBm	+35	+40	
Control	_	800-1000 MHz	mA	_	_	30

### Absolute Maximum Ratings <sup>2,3</sup>

Parameter	Absolute Maximum
Max. Input Power	+27 dBm
Operating Temperature	-40°C to +85°C
Storage Temperature	-65°C to +125°C

2. Exceeding any one or combination of these limits may cause permanent damage to this device.

 M/A-COM does not recommend sustained operation near these survivability limits.


#### Handling Procedures

Please observe the following precautions to avoid damage:

#### **Static Sensitivity**

Gallium Arsenide Integrated Circuits are sensitive to electrostatic discharge (ESD) and can be damaged by static electricity. Proper ESD control techniques should be used when handling these devices.

### **Recommended PCB Configuration**

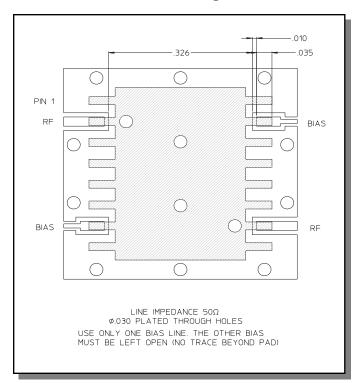

2

- India Tel: +91.80.4155721 China Tel: +86.21.2407.1588
- Visit www.macomtech.com for additional data sheets and product information.

PRELIMINARY: Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

ADVANCED: Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed. PRELIMINARY: Data Sheets contain information regarding a product M/A-COM Technology

<sup>•</sup> North America Tel: 800.366.2266 • Europe Tel: +353.21.244.6400


M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.

# Voltage Variable Absorptive Attenuator, 800 - 1000 MHz




#### **Typical Performance Curves**


#### Insertion Loss

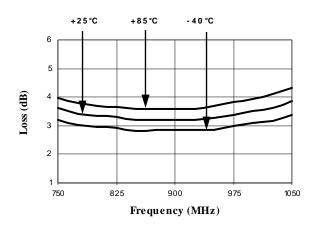


#### Attenuation Flatness (dB) @ +25°C

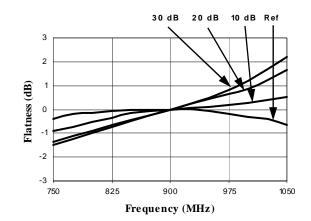

Typical VSWR @ +25°C

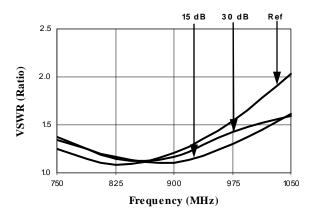

Attenuation vs. Bias Current Frequency = 1000 MHz

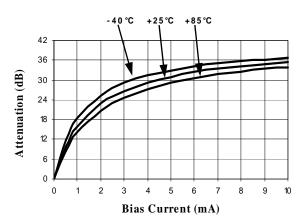

- ADVANCED: Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed. **PRELIMINARY:** Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.
- North America Tel: 800.366.2266
   Europe Tel: +353.21.244.6400
   India Tel: +91.80.4155721
   China Tel: +86.21.2407.1588
- Visit www.macomtech.com for additional data sheets and product information.


M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.

# Voltage Variable Absorptive Attenuator, 800 - 1000 MHz



Rev. V9

#### SOW-16<sup>†</sup>

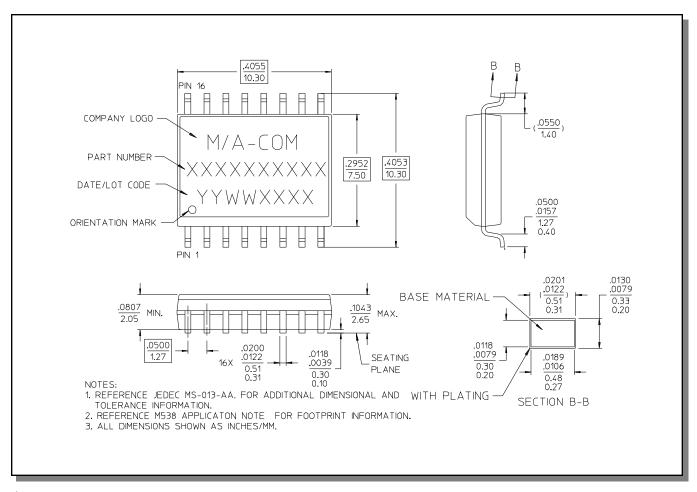

<sup>†</sup> Reference Application Note M538 for lead-free solder reflow recommendations.

4

- ADVANCED: Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed. **PRELIMINARY:** Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.
- North America Tel: 800.366.2266
   Europe Tel: +353.21.244.6400
   India Tel: +91.80.4155721
   China Tel: +86.21.2407.1588
- Visit www.macomtech.com for additional data sheets and product information.

M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.