

High Power Lamp

Preliminary

EHP-5393/UT01-P01

Features

- Popular 10mm package.
- Color coordinates: x=0.29, y=0.28 according to CIE.
- View angle:25°.
- High light flux output
- Soldering methods: Dip soldering.
- Grouping parameter: total luminous flux, color coordinates.
- Optical efficiency: 35 lm/W
- Thermal resistance (junction to leadframe): 13K/W
- The product itself will remain within RoHS compliant version.
- ESD-withstand voltage: up to 4KV



- The series is specially designed for applications requiring higher brightness.
- The LED lamps are available with different colors, intensities, epoxy colors, etc.

Applications

- Flashlight
- Sunshine light.
- Advertising Signs.
- Back lighting.

Device Selection Guide

| LEDD AN | Cł | Lens Color | |
|------------------|----------|------------------------|-------------|
| LED Part No. | Material | Material Emitted Color | |
| EHP5393/UT01-P01 | InGaN | White | Water Clear |





High Power Lamp


Preliminary

EHP-5393/UT01-P01

Package Dimensions



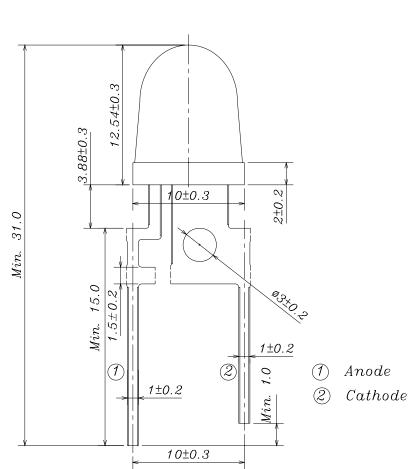



Notes:

- Other dimensions are in millimeters, tolerance is 0.25mm except being specified.
- Protruded resin under flange is 1.5mm Max LED.
- Bare copper alloy is exposed at tie-bar portion after cutting.

Everlight Electronics Co., Ltd.

Device Number:

 $http \verb|\| : www.everlight.com|\\$

Prepared date:12-20-2005

Rev Page: 2 of 9



High Power Lamp

Preliminary

EHP-5393/UT01-P01

Absolute Maximum Rating $(T_a=25^{\circ}C)$

| Parameter | Symbol | Absolute Maximum Rating | Unit |
|--|------------------|-------------------------|------------------------------|
| Forward Current | I_{F} | 350 | mA |
| Thermal resistance (junction to leadframe) | $R_{th(j-1)}$ | 13 | K/W |
| LED Junction Temperature | Tj | 120 | $^{\circ}\!\mathbb{C}$ |
| Operating Temperature | Topr | -40 ~ +100 | $^{\circ}\!\mathbb{C}$ |
| Storage Temperature | T_{stg} | -40 ~ +100 | $^{\circ}\! \mathbb{C}$ |
| Electrostatic Discharge | ESD | 4K | V |
| Soldering Temperature | $T_{\rm sol}$ | 260 ±5 | $\mathbb{O}_{\!\!\!\!\circ}$ |
| Power Dissipation | P _d | 1.4 | W |
| Zener Reverse Current | Iz | 100 | mA |

Notes: Soldering time ≤ 5 seconds.

Electro-Optical Characteristics ($T_a=25^{\circ}C$)

| Parameter | Symbol | Min. | Тур. | Max. | Unit | Condition |
|-----------------------|----------------------|------|------|------|----------------------|-----------------------|
| Luminous Flux | Flux | 27 | 37 | | lm | |
| Viewing Angle | $2	heta_{	ext{1/2}}$ | | 25 | | deg | I _F =350mA |
| Forward Voltage | V_{F} | 3.0 | 3.5 | 4.0 | V | |
| Reverse Current | I_R | | | 10 | μΑ | V _R =5V |
| Zener Reverse Voltage | Vz | 5.2 | | | V | Iz=5mA |
| Chromaticity | Х | | 0.29 | | | I 250 A |
| Coordinates | y | | 0.28 | | I _F =350r | $I_F=350\text{mA}$ |

Everlight Electronics Co., Ltd.

 $http \verb|\| : www.everlight.com|\\$

Device Number:

Prepared date:12-20-2005

Rev

Page: 3 of 9



High Power Lamp

Preliminary

EHP-5393/UT01-P01

Rank Combination (I_F=350mA)

| Rank | J2 | Ј3 | J4 | J5 |
|---------------|-------|-------|-------|-------|
| Luminous Flux | 27~33 | 33~39 | 39~45 | 45~52 |

^{*}Measurement Uncertainty of Luminous Intensity: ±15%

Unit:lm

Forward Voltage Combination (V at 350mA)

| Rank | 1 | 2 | 3 | 4 | 5 |
|-----------------|---------|---------|---------|---------|---------|
| Forward Voltage | 3.0~3.2 | 3.2~3.4 | 3.4~3.6 | 3.6~3.8 | 3.8~4.0 |

^{*}Measurement Uncertainty of Forward Voltage: ±0.1V

Unit:V

Color Combination (at 350mA)

| Color Ranks | | CIE | | | |
|-------------|---|-------|-------|-------|-------|
| A 1 | X | 0.245 | 0.264 | 0.28 | 0.26 |
| A1 | Y | 0.225 | 0.267 | 0.248 | 0.21 |
| A O | X | 0.264 | 0.283 | 0.296 | 0.28 |
| A0 | Y | 0.267 | 0.305 | 0.267 | 0.248 |
| D2 | X | 0.283 | 0.304 | 0.307 | 0.287 |
| В3 | Y | 0.305 | 0.33 | 0.315 | 0.295 |
| D4 | X | 0.304 | 0.33 | 0.33 | 0.307 |
| B4 | Y | 0.33 | 0.36 | 0.339 | 0.315 |
| D.5 | X | 0.287 | 0.307 | 0.311 | 0.296 |
| B5 | Y | 0.295 | 0.315 | 0.294 | 0.276 |
| В6 | X | 0.307 | 0.33 | 0.33 | 0.311 |
| | Y | 0.315 | 0.339 | 0.318 | 0.294 |
| С0 | X | 0.33 | 0.361 | 0.355 | 0.33 |
| | Y | 0.36 | 0.385 | 0.35 | 0.318 |

Everlight Electronics Co., Ltd.

Device Number:

http\\:www.everlight.com

Page: 4 of 9 Rev

Prepared date:12-20-2005 Prepared by: Grace Shen




High Power Lamp

Preliminary

EHP-5393/UT01-P01

CIE Chromaticity Diagram

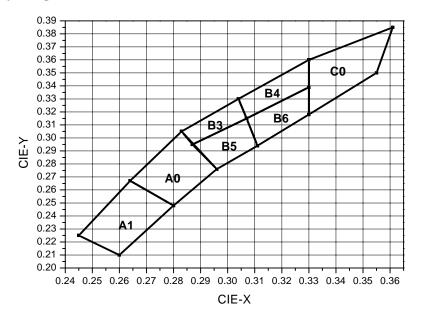





High Power Lamp


Preliminary

EHP-5393/UT01-P01


Typical Electro-Optical Characteristics Curves









Ambient Temperature Ta(°C)



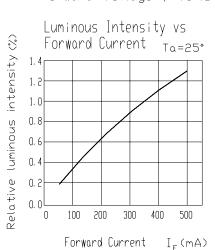



Everlight Electronics Co., Ltd.

Device Number:

http\\:www.everlight.com Prepared date:12-20-2005 Rev

Page: 6 of 9



High Power Lamp

Preliminary

EHP-5393/UT01-P01

Packing Quantity Specification

1.250PCS/1Bag, 5Bags/1Box

2.10Boxes/1Carton

Label Form Specification

EVERLIGHT

CPN:

P/N:

RoHS

EHP-5393/UT01-P01

OTY:

CAT:

HUE:

LOT NO:

REF:

MADE IN TAIWAN

CPN: Customer's Production Number

P/N : Production Number QTY: Packing Quantity

CAT: Ranks of Total Flux and Forward Voltage

HUE: Color Rank REF: Reference

LOT No: Lot Number

MADE IN TAIWAN: Production Place

Everlight Electronics Co., Ltd.

Device Number :

http\\:www.everlight.com

Prepared date:12-20-2005

Rev

Page: 7 of 9




High Power Lamp

Preliminary

EHP-5393/UT01-P01

Notes

- 1. Above specification may be changed without notice. EVERLIGHT will reserve authority on material change for above specification.
- 2. When using this product, please observe the absolute maximum ratings and the instructions for using outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.
- These specification sheets include materials protected under copyright of EVERLIGHT corporation. Please don't reproduce or cause anyone to reproduce them without EVERLIGHT's consent.
- 4. Below the zener reference voltage Vz, all the current flows through LED and as the voltage rises to Vz, the zener diode "breakdown." If the voltage tries to rise above Vz current flows through the zener branch to keep the voltage at exactly Vz.
- 5. When the LED is connected using serial circuit, if either piece of LED is no light up but current can't flow through causing others to light down. In new design, the LED is parallel with zener diode. if either piece of LED is no light up but current can flow through causing others to light up.

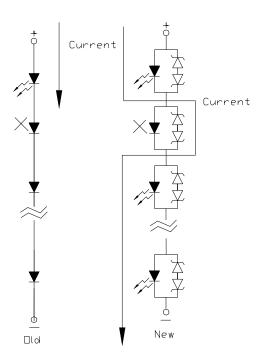

Rev

Everlight Electronics Co., Ltd.

Device Number:

http\\:www.everlight.com Prepared date:12-20-2005

Page: 8 of 9



High Power Lamp

Preliminary

EHP-5393/UT01-P01

- 6. If the emitter is operated, consider using metal heat sink with the lowest possible thermal resistance. For the thermal performance using a flat heat sink, allow an exposed surface area of about 25mm² at least.
- 7. Soldering Condition

Careful attention should be paid during soldering. When soldering, leave more then 3mm from solder joint to case, and soldering beyond the base of the tie bar is recommended.

Avoiding applying any stress to the lead frame while the LEDs are at high temperature particularly when soldering.

Recommended soldering conditions:

| Hand Soldering | | DIP Soldering | | |
|----------------------|-------------------------------------|---------------|--------------------------|--|
| Temp. at tip of iron | 400°C Max. (30W Max.) | Preheat temp. | 100°C Max. (60 sec Max.) | |
| Soldering time | 3 sec Max. | Bath temp. | 265 Max. | |
| Distance | 3mm Min.(From solder joint to case) | Bath time. | 5 sec Max. | |
| | | Distance | 3mm Min. | |

EVERLIGHT ELECTRONICS CO., LTD.

Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C Tel: 886-2-2267-2000, 2267-9936

Fax: 886-2267-6244, 2267-6189, 2267-6306

http:\\www.everlight.com

Everlight Electronics Co., Ltd. http\\:www.everlight.com Rev Page: 9 of 9

Device Number: Prepared date:12-20-2005 Prepared by: Grace Shen