#### **FEATURES**

- 0...10 "H<sub>2</sub>O to 0...150 psi gage,
  0...15 to 0...150 psi absolute
- · Precision temperature compensated
- · Calibrated offset and span
- Voltage excitation
- · Excellent long term stability

#### **SERVICE**

Non-corrosive, non-ionic working fluids such as clean dry air, dry gases and the like.

The media wetted materials are:

port 1: - front side of silicon sensor chip

- glass filled nylon

-RTV

- silgel (for devices of 5 psi and above)

- ceramic (Al<sub>2</sub>O<sub>2</sub>)

port 2: - silicon sensor chip

- glass filled nylon

-RTV


- ceramic (Al<sub>2</sub>O<sub>3</sub>)



#### **EQUIVALENT CIRCUIT**

# -Vout 4 +Vout 2 01 -Vs

#### **ELECTRICAL CONNECTION**

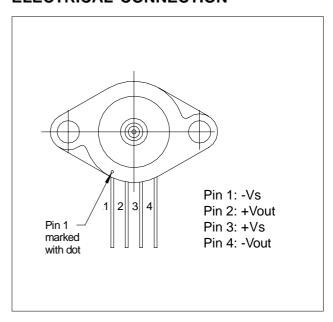

June 2008 / 616 1/6



# XPC/XPCL Series H-grade



## Precision compensated pressure sensors / mV-output

#### **SPECIFICATIONS**

#### **Maximum ratings** (for all devices)

#### Environmental specifications (for all devices)

Supply voltage V<sub>s</sub>

3 to 16 V

Temperature range

Lead temperature (soldering 5 seconds)

315°C

Compensated

0 to 70°C

Common mode pressure

50 psig

Operating

-25 to 85°C

Storage

-40 to 125°C

Humidity limits (non-condensing)

0 to 95 %RH

#### PRESSURE SENSOR CHARACTERISTICS

 $V_s = 12 \text{ V}, T_A = 25^{\circ}\text{C}, \text{ pressure applied to port P1}^{7}$ 

Part no.	Operating	Proof	Burst	Full scale span <sup>3</sup>			
	pressure pressu		pressure <sup>2</sup>	Min.	Тур.	Max.	
XPCL10	10 "H <sub>2</sub> O	3 psi	5 psi	19.5 mV	20 mV	20.5 mV	
XPC0.3	0.3 psi	3 psi	5 psi	19.5 mV	20 mV	20.5 mV	
XPC01	1 psi	3 psi	5 psi	17.5 mV	18 mV	18.5 mV	
XPC05	5 psi	15 psi	25 psi	59 mV	60 mV	61 mV	
XPC15	15 psi	45 psi	75 psi	89 mV	90 mV	91 mV	
XPC30	30 psi	90 psi	150 psi	89 mV	90 mV	91 mV	
XPC60	60 psi	180 psi	300 psi	89 mV	90 mV	91 mV	
XPC100	100 psi	250 psi	400 psi	99 mV	100 mV	101 mV	
XPC150	150 psi	250 psi	400 psi	89 mV	90 mV	91 mV	

#### PERFORMANCE CHARACTERISTICS

 $V_s = 12 \text{ V}, T_A = 25^{\circ}\text{C}, \text{ pressure applied to port P1}^{7}$ 

Characteristics	Min.	Тур.	Max.	Unit		
Zero pressure offset		-0.5	0	+0.5	mV	
Combined non-linearity and hysteresis <sup>4</sup>		±0.25	±0.5	0/500		
Temperature effects (0 to 70°C)⁵	Span			±1.0	%FSS	
	Offset			±0.5	mV	
Input resistance		5			I-O	
Output resistance			3		kΩ	
Response time (10 to 90 %FSS)	XPCL		500		μs	
	XPC		100			
Common mode voltage <sup>6</sup>			6		V	


- <sup>1</sup> Proof pressure is the maximum pressure which may be applied without causing durable shifts of the electrical parameters of the sensing element.
- <sup>2</sup> Burst pressure is the maximum pressure which may be applied without causing damage to the sensing element or leaks from the housing.
- <sup>3</sup> Full scale span is the algebraic difference between the output voltage at full-scale pressure and the output at zero pressure. The span is ratiometric to the supply voltage.
- <sup>4</sup> Non-linearity refers to the Best Straight Line fit measured for offset pressure, full-scale pressure and ½ full-scale pressure.
- <sup>5</sup> Shift is relative to 25°C.
- $^{6}$  This is the common-mode voltage of the output arms (pins 2 and 4) for  $V_{_{\rm S}}$  = 12 V.
- <sup>7</sup> For backside port devices (XPC...B...) pressure applied to P2.

2/6 June 2008 / 616




#### **OUTLINE DRAWING**


#### Package version AT and GT

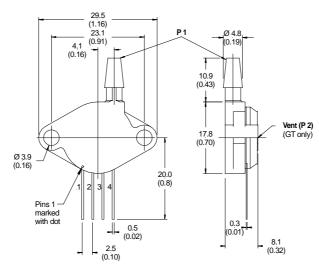

#### Package version AF and GF

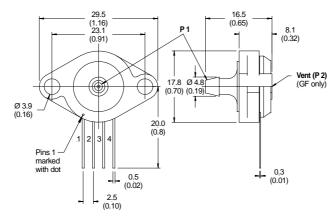

#### Package version AFS and GFS

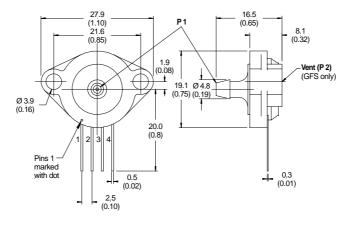

mass: approx. 2 g dimensions in mm (inches)


June 2008 / 616 3/6




# Precision compensated pressure sensors / mV-output

#### **OUTLINE DRAWING**


#### Package version GBT

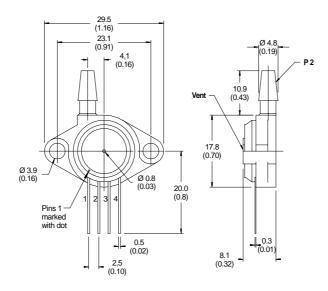

#### Package version GBF

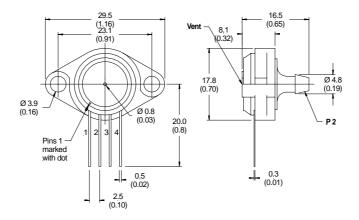

#### Package version GBFS

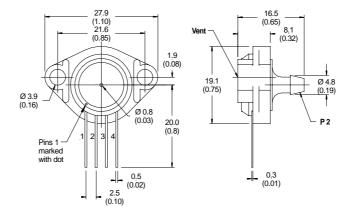

mass: approx. 2 g dimensions in mm (inches)

June 2008 / 616




4/6


# Precision compensated pressure sensors / mV-output

#### **OUTLINE DRAWING**


Package version A and D (no port)

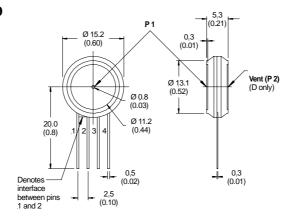

### Package version DF

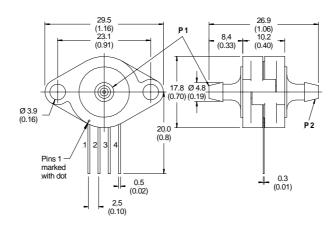

#### Package version DT

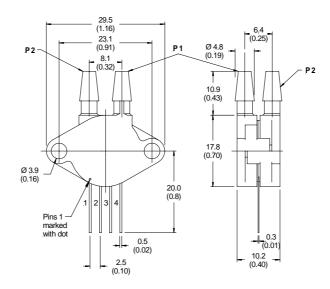

dimensions in mm (inches)

mass: approx. 2 g

June 2008 / 616 5/6



# Precision compensated pressure sensors / mV-output

#### **ORDERING INFORMATION**

Pressure range	Gage devices							
	Axial port (GF)	Radial port (GT)	Offset axial port (GFS)	Back side Axial port (GBF)	Back side Radial port (GBT)	Back side Offset axial port (GBFS)		
10 "H <sub>2</sub> O	8	8	8					
0.3 psi	8	8	XPC0.3GFSH	8	8	8		
1 psi	8	XPC01GTH	XPC01GFSH	8	8	8		
5 psi	8	XPC05GTH	8	8	8	8		
15 psi	XPC15GFH	8	8	8	8	8		
30 psi	8	8	XPC30GFSH	8	8	8		
60 psi	8	8	XPC60GFSH	XPC60GBFH	XPC60GBTH	XPC60GBFSH		
100 psi	XPC100GFH	8	8	8	8	8		
150 psi	8	XPC150GTH	8	8	8	8		

Pressure range	Absolute devices				Differential devices			
	No port (A)	Axial port (AF)	Radial port (AT)	Offset axial port (AFS)	No port (D)	Axial port (DF)	Radial port (DT)	
10 "H <sub>2</sub> O					XPCL10DH	XPCL10DFH	XPCL10DTH	
0.3 psi					XPC0.3DH	8	XPC0.3DTH	
1 psi					XPC01DH	8	XPC01DTH	
5 psi					8	XPC05DFH	XPC05DTH	
15 psi	XPC15AH	XPC15AFH	8	8	8	XPC15DFH	XPC15DTH	
30 psi	8	8	8	8	8	8	XPC30DTH	
60 psi	8	8	8	8	8	8	XPC60DTH	
100 psi	8	8	8	8	8	8	8	
150 psi	8	8	8	8	8	8	8	

#### Note

Sensortechnics reserves the right to make changes to any products herein. Sensortechnics does not assume any liability arising out of the application or use of any product or circuit described herein, neither does it convey any license under its patent rights nor the rights of others.

6/6 June 2008 / 616



<sup>\*</sup> THESE DEVICES ARE AVAILABLE ON SPECIAL REQUEST. MINIMUM ORDER QUANTITY APPLIES.