





T-5 Wedge Base




Part Number	Design Voltage	Amps	MSCP	Life Hours	Filament Type
CM914	4.0	.90	3.5	50	C-6
CM926	4.0	1.80	7.5	50	C-2R
CM903	6.0	1.00	6.0	200	C-2R
CM908	6.0	1.50	12.0	50	C-2R
CM909	6.0	.62	3.8	30	C-2R
CM927	6.0	1.20	8.0	50	C-2R
CM929	6.0	1.00	6.5	50	C-2R
CM915	12.0	.75	11.0	50	C-2R
CM912	12.8	1.00	12.0	1,000	C-2R
CM917	12.8	1.20	10.0	1,200	C-2F
CM921	12.8	1.40	21.0	1,000	C-2R
CM922	12.8	.98	15.0	200	C-2R
CM906	13.0	.69	6.0	1,000	C-2F
CM904	13.5	.69	4.0	5,000	C-2F
CM916	13.5	.54	2.0	10,000	C-2F
CM928	28.0	.30	6.0	500	C-2F

TL-3/4 Wire Terminal Lens End



Part Number	Design Voltage	Amps	Spot Characteristic	Life Hours	Filament Type
CM1212	5.0	.06	None	25,000	C-2R
CM1425	5.0	.12	None	40,000	C-2R

TL-3/4 Micro-Midget Flange Base Lens End

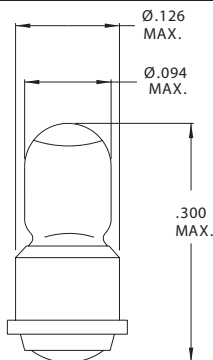

Part Number	Design Voltage	Amps	Spot Characteristic	Life Hours	Filament Type
CM3909	5.0	.12	None	16,000	C-2R
CM3910	5.0	.06	None	25,000	C-2R

147 Central Avenue
Hackensack, NJ 07601
Phone: (201) 489-8989
Fax: (201) 489-6911

18703 Dix Toledo Road
Brownstown, MI 48193

Saret Zone Franca, Edificio B
Alajuela Costa Rica

E-mail: sales@chml.com • Web Site: www.chml.com