UHF power LDMOS transistor Rev. 01 — 16 December 2008

Objective data sheet

Product profile

1.1 General description

A 500 W LDMOS RF power transistor for broadcast transmitter applications and industrial applications. The transistor is optimized for digital applications and can deliver 110 W average DVB-T broadband over the full UHF band from 470 MHz to 860 MHz. The excellent ruggedness of this device makes it ideal for digital transmitter applications.

Table 1. **Application information**

RF performance at V_{DS} = 50 V in a common source 860 MHz narrowband test circuit unless otherwise specified.

Mode of operation	f (MHz)	P _{L(PEP)} (W)	P _{L(AV)} (W)	G _p (dB)	η _D (%)		IMD _{shldr} (dBc)
2-tone, class AB	$f_1 = 860; f_2 = 860.1$	500	250	20	45	<tbd></tbd>	-
DVB-T (8k OFDM)	858	-	110	20	30	-	-32 [<u>1]</u>

^[1] Measured [dBc] with delta marker at 4.3 MHz from center frequency.

CAUTION



This device is sensitive to ElectroStatic Discharge (ESD). Therefore care should be taken during transport and handling.

1.2 Features

- 2-tone performance at 860 MHz, a drain-source voltage V_{DS} of 50 V and a quiescent drain current $I_{Dq} = 1.4 A$:
 - ◆ Peak envelope power load power = 500 W
 - ◆ Power gain = 20 dB
 - Drain efficiency = 45 %
 - ◆ Third order intermodulation distortion = <tbd> dBc
- DVB performance at 858 MHz, a drain-source voltage V_{DS} of 50 V and a quiescent drain current $I_{Da} = 1.4 A$:
 - Average output power = 110 W
 - ◆ Power gain = 20 dB
 - ◆ Drain efficiency = 30 %
 - ◆ Shoulder distance = -32 dBc (4.3 MHz from center frequency)
- Integrated ESD protection
- Advanced flange material for optimum thermal behavior and reliability



UHF power LDMOS transistor

- Excellent ruggedness
- High power gain
- High efficiency
- Designed for broadband operation (470 MHz to 860 MHz)
- Excellent reliability
- Internal input matching for high gain and optimum broadband operation
- Easy power control
- Compliant to Directive 2002/95/EC, regarding Restriction of Hazardous Substances (RoHS)

1.3 Applications

- Communication transmitter applications in the UHF band
- Industrial applications in the UHF band

2. Pinning information

Table 2. Pinning

Iubic 2.	· ····································			
Pin	Description		Simplified outline	Graphic symbol
1	drain1			
2	drain2		1 2	1
3	gate1		5	3
4	gate2		3 4	5
5	source	[1]		4
				sym117

^[1] Connected to flange.

3. Ordering information

Table 3. Ordering information

Type number	Packag	ackage					
	Name	Description	Version				
BLF888	-	flanged LDMOST ceramic package; 2 mounting holes; 4 leads	SOT979A				

4. Limiting values

Table 4. Limiting values

In accordance with the Absolute Maximum Rating System (IEC 60134).

Symbol	Parameter	Conditions	Min	Max	Unit
V_{DS}	drain-source voltage		-	104	V
V_{GS}	gate-source voltage		-0.5	+13	V
T _{stg}	storage temperature		-65	+150	°C
Tj	junction temperature		-	200	°C

BLF888_1 © NXP B.V. 2008. All rights reserved.

UHF power LDMOS transistor

5. Thermal characteristics

Table 5. Thermal characteristics

Symbol	Parameter	Conditions		Тур	Unit
$R_{th(j-c)}$	thermal resistance from junction to case	T_{case} = 80 °C; $P_{L(AV)}$ = 110 W	<u>[1]</u>	0.23	K/W

^[1] $R_{th(j-c)}$ is measured under RF conditions.

6. Characteristics

Table 6. DC characteristics

 $T_i = 25 \,^{\circ}C$ unless otherwise specified.

Symbol	Parameter	Conditions		Min	Тур	Max	Unit
$V_{(BR)DSS}$	drain-source breakdown voltage	$V_{GS} = 0 \text{ V}; I_D = 2.7 \text{ mA}$	[1]	104	-	-	V
V _{GS(th)}	gate-source threshold voltage	$V_{DS} = 10 \text{ V}; I_D = 270 \text{ mA}$	[1]	1.4	1.9	2.4	V
I_{DSS}	drain leakage current	$V_{GS} = 0 \text{ V}; V_{DS} = 50 \text{ V}$		-	-	2.8	μΑ
I _{DSX}	drain cut-off current	$V_{GS} = V_{GS(th)} + 3.75 \text{ V}; V_{DS} = 10 \text{ V}$		-	44	-	Α
I_{GSS}	gate leakage current	$V_{GS} = 10 \text{ V}; V_{DS} = 0 \text{ V}$		-	-	280	nA
9 _{fs}	forward transconductance	$V_{GS} = 10 \text{ V}; I_D = 13.5 \text{ A}$	[1]	-	<tbd></tbd>	-	S
R _{DS(on)}	drain-source on-state resistance	$V_{GS} = V_{GS(th)} + 3.75 \text{ V}; I_D = 9.5 \text{ A}$	[1]	-	105	-	$m\Omega$
C _{iss}	input capacitance	$V_{GS} = 0 \text{ V}; V_{DS} = 50 \text{ V}; f = 1 \text{ MHz}$	[2]	-	205	-	pF
C _{oss}	output capacitance	$V_{GS} = 0 \text{ V}; V_{DS} = 50 \text{ V}; f = 1 \text{ MHz}$	[2]	-	65	-	pF
C _{rss}	reverse transfer capacitance	$V_{GS} = 0 \text{ V}; V_{DS} = 50 \text{ V}; f = 1 \text{ MHz}$	[2]	-	2.2	-	pF
	·	·					

^[1] I_D is the drain current.

Table 7. RF characteristics

 $T_h = 25 \,^{\circ}C$ unless otherwise specified.

Symbol	Parameter	Conditions	Min	Тур	Max	Unit
_		Conditions		. 70	max	O.III
2-tone, cla	ass AB					
V_{DS}	drain-source voltage		-	50	-	V
I_{Dq}	quiescent drain current	total device	-	1.4	-	Α
$P_{L(PEP)}$	peak envelope power load power		250	-	-	W
$P_{L(AV)}$	average output power		250	-	-	W
Gp	power gain		18	-	-	dB
η_{D}	drain efficiency		42	-	-	%
IMD3	third order intermodulation distortion		-	-	<tbd></tbd>	dBc
DVB-T (8k	OFDM)					
V_{DS}	drain-source voltage		-	50	-	V
I _{Dq}	quiescent drain current	total device	-	1.4	-	Α
P _{L(AV)}	average output power		110	-	-	W
Gp	power gain		18	-	-	dB

BLF888_1 © NXP B.V. 2008. All rights reserved.

^[2] Capacitance values without internal matching.

UHF power LDMOS transistor

Table 7. RF characteristics ...continued

 $T_h = 25 \,^{\circ}C$ unless otherwise specified.

Symbol	Parameter	Conditions		Min	Тур	Max	Unit
η_{D}	drain efficiency			<tbd></tbd>	-	-	%
IMD _{shldr}	intermodulation distortion shoulder		[1]	-	-	<tbd></tbd>	dBc
PAR	peak-to-average ratio		[2]	-	8	-	dB

- [1] Measured [dBc] with delta marker at 4.3 MHz from center frequency.
- [2] PAR (of output signal) at 0.01 % probability on CCDF; PAR of input signal = 9.5 dB at 0.01 % probability on CCDF.

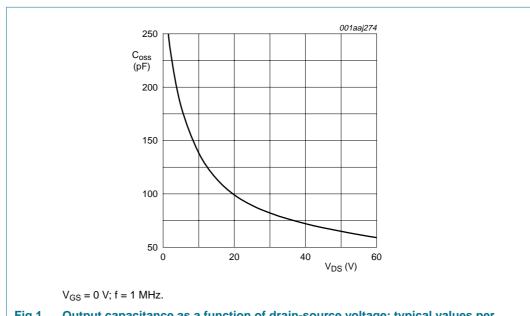


Fig 1. Output capacitance as a function of drain-source voltage; typical values per section; capacitance value without internal matching

6.1 Ruggedness in class-AB operation

The BLF888 is capable of withstanding a load mismatch corresponding to VSWR = 10 : 1 through all phases under the following conditions: V_{DS} = 50 V; f = 860 MHz at rated power.

UHF power LDMOS transistor

7. Package outline

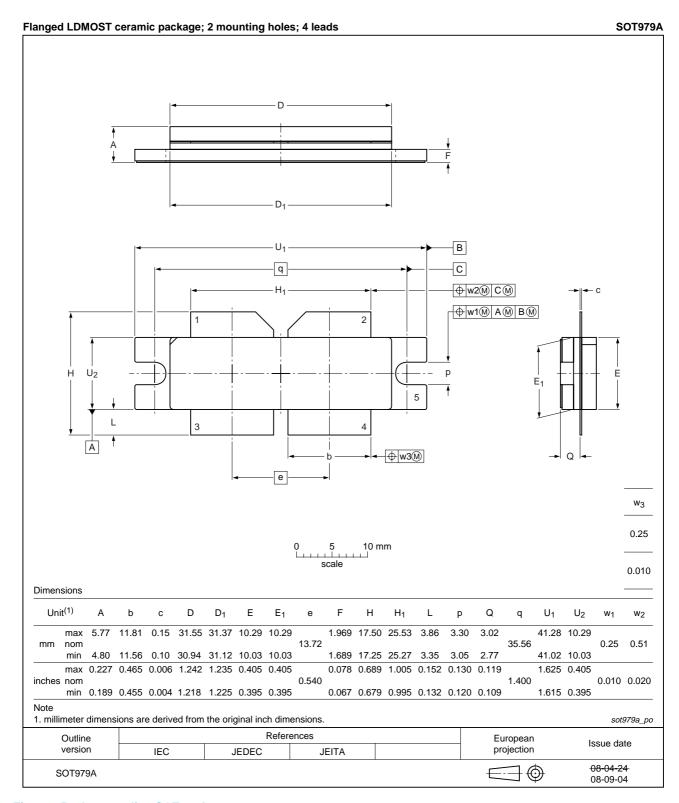


Fig 2. Package outline SOT979A

BLF888_1 © NXP B.V. 2008. All rights reserved.

UHF power LDMOS transistor

8. Abbreviations

Table 8. Abbreviations

Acronym	Description
CCDF	Complementary Cumulative Distribution Function
DVB	Digital Video Broadcast
DVB-T	Digital Video Broadcast - Terrestrial
LDMOS	Laterally Diffused Metal-Oxide Semiconductor
LDMOST	Laterally Diffused Metal-Oxide Semiconductor Transistor
OFDM	Orthogonal Frequency Division Multiplexing
PAR	Peak-to-Average power Ratio
RF	Radio Frequency
UHF	Ultra High Frequency
VSWR	Voltage Standing-Wave Ratio

9. Revision history

Table 9. Revision history

Document ID	Release date	Data sheet status	Change notice	Supersedes
BLF888_1	20081216	Objective data sheet	-	-

WWW.DataSheet4U.com NXP Semiconductors

UHF power LDMOS transistor

10. Legal information

10.1 Data sheet status

Document status[1][2]	Product status[3]	Definition
Objective [short] data sheet	Development	This document contains data from the objective specification for product development.
Preliminary [short] data sheet	Qualification	This document contains data from the preliminary specification.
Product [short] data sheet	Production	This document contains the product specification.

- [1] Please consult the most recently issued document before initiating or completing a design.
- [2] The term 'short data sheet' is explained in section "Definitions"
- [3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the Internet at URL http://www.nxp.com.

10.2 Definitions

Draft — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. NXP Semiconductors does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

Short data sheet — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local NXP Semiconductors sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

10.3 Disclaimers

General — Information in this document is believed to be accurate and reliable. However, NXP Semiconductors does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information.

Right to make changes — NXP Semiconductors reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

Suitability for use — NXP Semiconductors products are not designed, authorized or warranted to be suitable for use in medical, military, aircraft, space or life support equipment, nor in applications where failure or

malfunction of an NXP Semiconductors product can reasonably be expected to result in personal injury, death or severe property or environmental damage. NXP Semiconductors accepts no liability for inclusion and/or use of NXP Semiconductors products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

Applications — Applications that are described herein for any of these products are for illustrative purposes only. NXP Semiconductors makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Limiting values — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) may cause permanent damage to the device. Limiting values are stress ratings only and operation of the device at these or any other conditions above those given in the Characteristics sections of this document is not implied. Exposure to limiting values for extended periods may affect device reliability.

Terms and conditions of sale — NXP Semiconductors products are sold subject to the general terms and conditions of commercial sale, as published at http://www.nxp.com/profile/terms, including those pertaining to warranty, intellectual property rights infringement and limitation of liability, unless explicitly otherwise agreed to in writing by NXP Semiconductors. In case of any inconsistency or conflict between information in this document and such terms and conditions, the latter will prevail.

No offer to sell or license — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

10.4 Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

11. Contact information

For more information, please visit: http://www.nxp.com

For sales office addresses, please send an email to: salesaddresses@nxp.com

© NXP B.V. 2008. All rights reserved.

BLF888

UHF power LDMOS transistor

12. Contents

1	Product profile
1.1	General description
1.2	Features
1.3	Applications 2
2	Pinning information 2
3	Ordering information
4	Limiting values 2
5	Thermal characteristics 3
6	Characteristics 3
6.1	Ruggedness in class-AB operation 4
7	Package outline 5
8	Abbreviations 6
9	Revision history 6
10	Legal information 7
10.1	Data sheet status
10.2	Definitions
10.3	Disclaimers
10.4	Trademarks 7
11	Contact information 7
12	Contents 8

Please be aware that important notices concerning this document and the product(s) described herein, have been included in section 'Legal information'.



All rights reserved.

For more information, please visit: http://www.nxp.com For sales office addresses, please send an email to: salesaddresses@nxp.com

Date of release: 16 December 2008 Document identifier: BLF888_1

