

March 2013

# FDD7N25LZ

# N-Channel UniFET<sup>TM</sup> MOSFET 250 V, 6.2 A, 550 m $\Omega$

### **Features**


- $R_{DS(on)} = 430 \text{ m}\Omega$  (Typ.) @  $V_{GS} = 10 \text{ V}$ ,  $I_D = 3.1 \text{ A}$
- Low Gate Charge (Typ.12 nC)
- Low C<sub>rss</sub> (Typ. 8 pF)
- 100% Avalanche Tested
- Improved dv/dt Capability
- · ESD Improved Capability
- RoHS Compliant


# **Applications**

- LCD/LED/PDP TV
- Consumer Appliances
- Lighting
- Uninterruptible Power Supply
- AC-DC Power Supply

# **Description**

UniFET<sup>TM</sup> MOSFET is Fairchild Semiconductor<sup>®</sup>'s high voltage MOSFET family based on planar stripe and DMOS technology. This MOSFET is tailored to reduce on-state resistance, and to provide better switching performance and higher avalanche energy strength. This device family is suitable for switching power converter applications such as power factor correction (PFC), flat panel display (FPD) TV power, ATX and electronic lamp ballasts.





# MOSFET Maximum Ratings T<sub>C</sub> = 25°C unless otherwise noted\*

Symbol		Parameter		FDD7N20LZ	Unit
V <sub>DSS</sub>	Drain to Source Voltage			250	V
V <sub>GSS</sub>	Gate to Source Voltage			±20	V
1	Drain Current	- Continuous (T <sub>C</sub> = 25°C)		6.2	۸
ID	Drain Current	- Continuous (T <sub>C</sub> = 100°C)		3.7	A
I <sub>DM</sub>	Drain Current	- Pulsed	- Pulsed (Note 1)		Α
E <sub>AS</sub>	Single Pulsed Avalanche En	ergy	(Note 2)	115	mJ
I <sub>AR</sub>	Avalanche Current		(Note 1)	5.5	А
E <sub>AR</sub>	Repetitive Avalanche Energy		(Note 1)	5.6	mJ
dv/dt	Peak Diode Recovery dv/dt		(Note 3)	10	V/ns
Б	Davis Dissipation	$(T_C = 25^{\circ}C)$		56	W
$P_{D}$	Power Dissipation	- Derate above 25°C		0.45	W/°C
T <sub>J</sub> , T <sub>STG</sub>	Operating and Storage Temp	perature Range		-55 to +150	°C
T <sub>L</sub>	Maximum Lead Temperature 1/8" from Case for 5 Second	<b>5</b> 1 ,		300	°C

# **Thermal Characteristics**

Symbol	Parameter FDD7N20LZ		
$R_{\theta JC}$	Thermal Resistance, Junction to Case, Max.	2.2	°C/W
$R_{\theta JA}$	Thermal Resistance, Junction to Ambient, Max.	110	*C/VV

# **Package Marking and Ordering Information**

Device Marking	Device	Package	Reel Size	Tape Width	Quantity
FDD7N25LZ	FDD7N25LZ	D-PAK	380mm	16mm	2500

# **Electrical Characteristics** $T_C = 25^{\circ}C$ unless otherwise noted

Symbol	Parameter	Test Conditions	Min.	Тур.	Max.	Unit
Off Charac	cteristics					
BV <sub>DSS</sub>	Drain to Source Breakdown Voltage	$I_D = 250 \mu A, V_{GS} = 0 V, T_C = 25^{\circ} C$	250	-	-	V
$\frac{\Delta BV_{DSS}}{\Delta T_{J}}$	Breakdown Voltage Temperature Coefficient	$I_D = 250\mu\text{A}$ , Referenced to $25^{\circ}\text{C}$	-	0.25	-	V/°C
1	Zero Gate Voltage Drain Current	V <sub>DS</sub> = 250V, V <sub>GS</sub> = 0V	-	-	1	^
IDSS	Zero Gate voltage Drain Current	$V_{DS} = 200V, T_{C} = 125^{\circ}C$	-	-	10	μΑ
I <sub>GSSF</sub>	Gate to Body Leakage Current, Forward	V <sub>GS</sub> = 20V, V <sub>DS</sub> = 0V	-	-	10	μΑ
I <sub>GSSR</sub>	Gate to Body Leakage Current, Reverse	V <sub>GS</sub> = -20V, V <sub>DS</sub> = 0V	-	-	-10	μΑ

## **On Characteristics**

V <sub>GS(th)</sub>	Gate Threshold Voltage	$V_{GS} = V_{DS}, I_{D} = 250 \mu A$	1.0	-	2.0	V
R <sub>DS(on)</sub> Static Drain to Source On Resistance	$V_{GS} = 10V, I_D = 3.1A$	-	0.43	0.55	Ω	
	Static Drain to Source On Resistance	$V_{GS} = 5V, I_D = 3.1A$	-	0.45	0.57	52
9 <sub>FS</sub>	Forward Transconductance	$V_{DS} = 20V, I_{D} = 3.1A$	-	7	-	S

# **Dynamic Characteristics**

C <sub>iss</sub>	Input Capacitance	V 05V V 0V		-	480	635	pF
C <sub>oss</sub>	Output Capacitance	$V_{DS} = 25V, V_{GS} = 0V$ 		-	65	85	pF
C <sub>rss</sub>	Reverse Transfer Capacitance	1 = 1101112		-	8	12	pF
Q <sub>g(tot)</sub>	Total Gate Charge at 10V			-	12	16	nC
Q <sub>gs</sub>	Gate to Source Gate Charge	$V_{DS} = 250V I_{D} = 6.2A$		-	1.5	-	nC
Q <sub>gd</sub>	Gate to Drain "Miller" Charge	V <sub>GS</sub> = 10V	(Note 4)	-	4	-	nC

# **Switching Characteristics**

t <sub>d(o</sub>			-	10	30	ns
t <sub>r</sub>		$V_{DD} = 250V, I_{D} = 6.2A$	-	15	40	ns
t <sub>d(o</sub>	Turn-Off Delay Time	$V_{GS} = 10V, R_G = 25\Omega$	-	75	160	ns
t <sub>f</sub>	Turn-Off Fall Time	(Note 4)	-	30	70	ns

## **Drain-Source Diode Characteristics**

Is	Maximum Continuous Drain to Source Diode Forward Current		-	-	5.5	Α
I <sub>SM</sub>	Maximum Pulsed Drain to Source Diode Forward Current		-	-	20	Α
$V_{SD}$	Drain to Source Diode Forward Voltage	$V_{GS} = 0V, I_{SD} = 6.2A$	-	-	1.4	V
t <sub>rr</sub>	Reverse Recovery Time	V <sub>GS</sub> = 0V, I <sub>SD</sub> = 6.2A	-	130	-	ns
$Q_{rr}$	Reverse Recovery Charge	$dI_F/dt = 100A/\mu s$	-	0.6	-	μС

#### Notes:

- 1. Repetitive Rating: Pulse width limited by maximum junction temperature
- 2. L = 6mH, I $_{AS}$  = 6.2A, V $_{DD}$  = 50V, R $_{G}$  = 25 $\Omega$ , Starting T $_{J}$  = 25 $^{\circ}$ C
- 3.  $I_{SD} \le 6.2 A$ , di/dt  $\le 200 A/\mu s$ ,  $V_{DD} \le BV_{DSS}$ , Starting  $T_J = 25^{\circ}C$
- 4. Essentially Independent of Operating Temperature Typical Characteristics

# **Typical Performance Characteristics**

Figure 1. On-Region Characteristics





Figure 3. On-Resistance Variation vs.
Drain Current and Gate Voltage



**Figure 5. Capacitance Characteristics** 




Figure 2. Transfer Characteristics




Figure 4. Body Diode Forward Voltage Variation vs. Source Current and Temperature





Figure 6. Gate Charge Characteristics



# **Typical Performance Characteristics** (Continued)

Figure 7. Breakdown Voltage Variation vs. Temperature




Figure 9. Maximum Safe Operating Area - FDD7N25LZ




Figure 8. On-Resistance Variation vs. Temperature




Figure 10. Maximum Drain Current vs. Case Temperature







Figure 11. Transient Thermal Response Curve - FDD7N25LZ

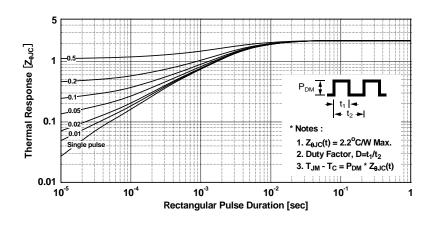


# **Gate Charge Test Circuit & Waveform**

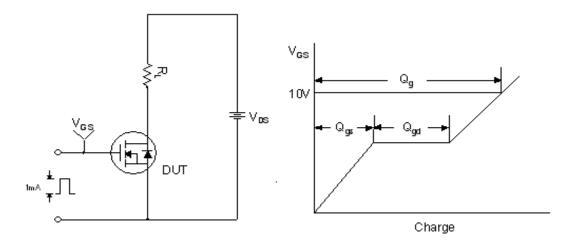


# **Resistive Switching Test Circuit & Waveforms**

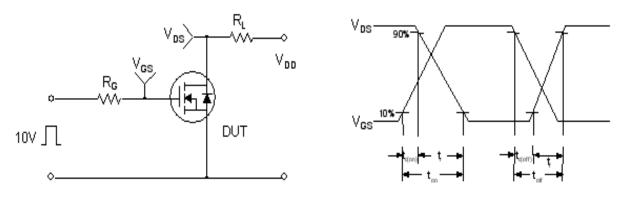



**Unclamped Inductive Switching Test Circuit & Waveforms** 

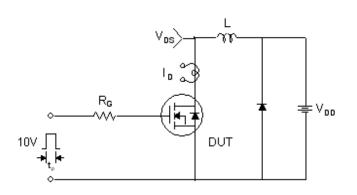





## Peak Diode Recovery dv/dt Test Circuit & Waveforms

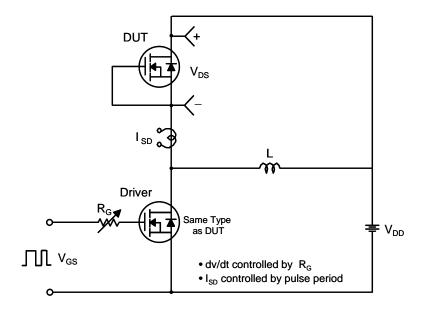






Body Diode Reverse Current

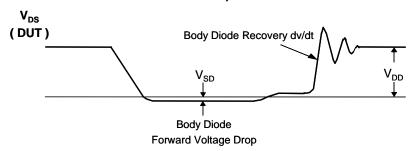

# **Mechanical Dimensions**

# **D-PAK**

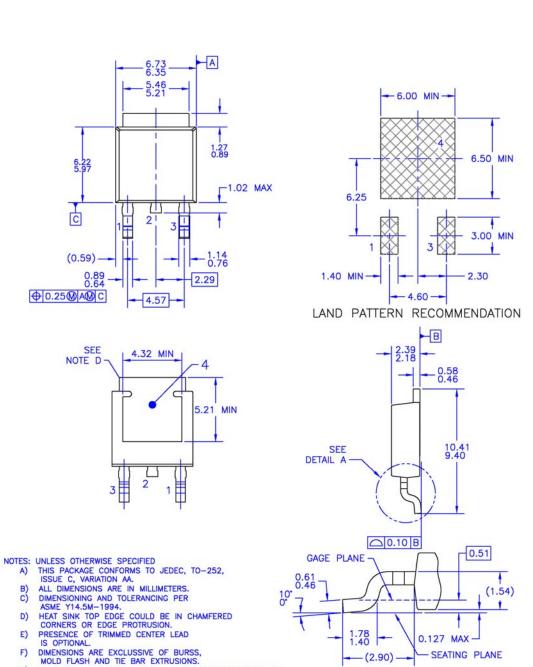

**Dimensions in Millimeters** 

DETAIL A (ROTATED -90°) SCALE: 12X

LAND PATTERN RECOMENDATION IS BASED ON IPC7351A STD T0220P1003X238-3N.

DRAWING NUMBER AND REVISION: MKT-T0252A03REV8





#### **TRADEMARKS**

The following includes registered and unregistered trademarks and service marks, owned by Fairchild Semiconductor and/or its global subsidiaries, and is not intended to be an exhaustive list of all such trademarks.

2Cool™ FPSTM AccuPower™ F-PFS™ FRFET® AX-CAP® BitSiC™ Global Power Resource<sup>SM</sup> Build it Now™ Green Bridge™ CorePLUS™ Green FPS™ CorePOWER™ Green FPS™ e-Series™ CROSSVOLT™ Gmax™ GTO™

Current Transfer Logic™ IntelliMAX™ DEUXPEED® ISOPLANAR™ Dual Cool™ Marking Small Speakers Sound Louder

EcoSPARK® and Better™ EfficentMax™ MegaBuck™ ESBC™ MICROCOUPLER™

MicroFET™ MicroPak™ MicroPak2™ Fairchild<sup>®</sup> MillerDrive™ Fairchild Semiconductor® MotionMax™ FACT Quiet Series™ mWSaver™ FACT<sup>®</sup> FAST® OptoHiT™ OPTOLOGIC® FastvCore<sup>™</sup> OPTOPLANAR® FETBench™

 $\mathsf{PowerTrench}^{\mathbb{R}}$ PowerXS™

Programmable Active Droop™

QFET<sup>®</sup> QS™ Quiet Series™ RapidConfigure™

Saving our world, 1mW/W/kW at a time™ SignalWise™

SmartMax™ SMART START™

Solutions for Your Success™

STEALTH™ SuperFET® SuperSOT™-3 SuperSOT™-6

SuperSOT™-8 SupreMOS® SyncFET™

Sync-Lock™

SYSTEM®' GENERAL TinyBoost<sup>T</sup> TinyBuck™ TinyCalc™ TinyLogic<sup>®</sup> TINYOPTO™ TinyPower™ TinyPWM™ TinyWire™ TranSiC®

TriFault Detect™ TRUECURRENT®\* μSerDes™

UHC<sup>®</sup> Ultra FRFET™ UniFET™ **VCX**<sup>TM</sup> VisualMax™ VoltagePlus™ XSTM

\*Trademarks of System General Corporation, used under license by Fairchild Semiconductor.

#### DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION, OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN, NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS. THESE SPECIFICATIONS DO NOT EXPAND THE TERMS OF FAIRCHILD'S WORLDWIDE TERMS AND CONDITIONS, SPECIFICALLY THE WARRANTY THEREIN, WHICH COVERS THESE PRODUCTS.

**LIFE SUPPORT POLICY**FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

As used here in:

- Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
- A critical component in any component of a life support, device, or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

#### ANTI-COUNTERFEITING POLICY

Fairchild Semiconductor Corporation's Anti-Counterfeiting Policy. Fairchild's Anti-Counterfeiting Policy is also stated on our external website, www.Fairchildsemi.com, under Sales Support.

Counterfeiting of semiconductor parts is a growing problem in the industry. All manufactures of semiconductor products are experiencing counterfeiting of their parts. Customers who inadvertently purchase counterfeit parts experience many problems such as loss of brand reputation, substandard performance, failed application, and increased cost of production and manufacturing delays. Fairchild is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. Fairchild strongly encourages customers to purchase Fairchild parts either directly from Fairchild or from Authorized Fairchild Distributors who are listed by country on our web page cited above. Products customers buy either from Fairchild directly or from Authorized Fairchild Distributors are genuine parts, have full traceability, meet Fairchild's quality standards for handing and storage and provide access to Fairchild's full range of up-to-date technical and product information. Fairchild and our Authorized Distributors will stand behind all warranties and will appropriately address and warranty issues that may arise. Fairchild will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources. Fairchild is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

#### PRODUCT STATUS DEFINITIONS Definition of Terms

Datasheet Identification Product Status		Definition
Advance Information Formative / In Design		Datasheet contains the design specifications for product development. Specifications may change in any manner without notice.
Preliminary	First Production	Datasheet contains preliminary data; supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design.
No Identification Needed	Full Production	Datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve the design.
Obsolete Not In Production		Datasheet contains specifications on a product that is discontinued by Fairchild Semiconductor. The datasheet is for reference information only.