


BAT62-07W

■ Features

- Low barrier diode for detectors up to GHz frequencies.

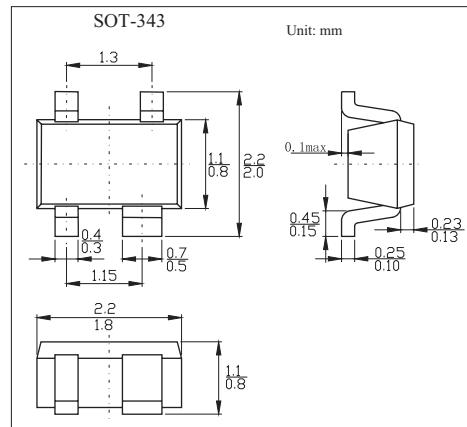

■ Absolute Maximum Ratings Ta = 25°C

Parameter	Symbol	Value	Unit
Diode reverse voltage	V _R	40	V
Forward current	I _F	20	mA
Total power dissipation, Ts = 103°C	P _{tot}	100	mW
Junction temperature	T _j	150	°C
Storage temperature range	T _{stg}	-55 to + 150	°C
Junction - ambient	R _{th JA}	≤ 630	K/W
Junction - soldering point	R _{th JS}	≤ 470	K/W

■ Electrical Characteristics Ta = 25°C

Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
Reverse current	I _R	V _R = 40 V			10	µ A
Forward voltage	I _F	I _F = 2 mA		0.58	1	V
Diode capacitance	C _T	f = 1 MHz; V _R = 0		0.35	0.6	pF
Case capacitance	C _c	f = 1 MHz		0.1		pF
Differential resistance	R _o	V _R = 0, f = 10 KHz		225		K Ω
Series inductance chip to ground	L _s			2		nH

■ Marking

Marking	62s
---------	-----