74HC1G08-Q100; 74HCT1G08-Q100

2-input AND gate Rev. 2 — 16 August 2012

Product data sheet

General description 1.

74HC1G08-Q100 and 74HCT1G08-Q100 are high-speed, Si-gate CMOS devices. They provide a 2-input AND function.

The HC device has CMOS input switching levels and supply voltage range 2 V to 6 V.

The HCT device has TTL input switching levels and supply voltage range 4.5 V to 5.5 V.

The standard output currents are half of those of the 74HC08-Q100 and 74HCT08-Q100.

This product has been qualified to the Automotive Electronics Council (AEC) standard Q100 (Grade 1) and is suitable for use in automotive applications.

Features and benefits 2.

- Automotive product qualification in accordance with AEC-Q100 (Grade 1)
 - ◆ Specified from -40 °C to +85 °C and from -40 °C to +125 °C
- Symmetrical output impedance
- High noise immunity
- Low power dissipation
- Balanced propagation delays
- ESD protection:
 - MIL-STD-883, method 3015 exceeds 2000 V
 - ◆ HBM JESD22-A114F exceeds 2000 V
 - ♦ MM JESD22-A115-A exceeds 200 V (C = 200 pF, R = 0 Ω)
- Multiple package options

Ordering information 3.

Table 1. **Ordering information**

Type number	Package							
	Temperature range	Name	Description	Version				
74HC1G08GW-Q100	–40 °C to +125 °C	TSSOP5	plastic thin shrink small outline package; 5 leads;	SOT353-1				
74HCT1G08GW-Q100			body width 1.25 mm					
74HC1G08GV-Q100	–40 °C to +125 °C	SC-74A	plastic surface-mounted package; 5 leads	SOT753				
74HCT1G08GV-Q100	_							




4. Marking


Table 2. Marking codes

Type number	Marking ^[1]
74HC1G08GW-Q100	HE
74HCT1G08GW-Q100	TE
74HC1G08GV-Q100	H08
74HCT1G08GV-Q100	T08

^[1] The pin 1 indicator is located on the lower left corner of the device, below the marking code.


5. Functional diagram

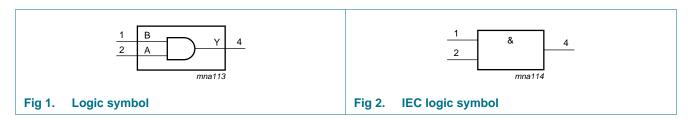

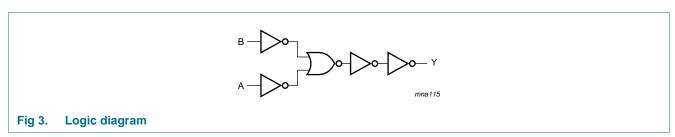

6. Pinning information

6.1 Pinning

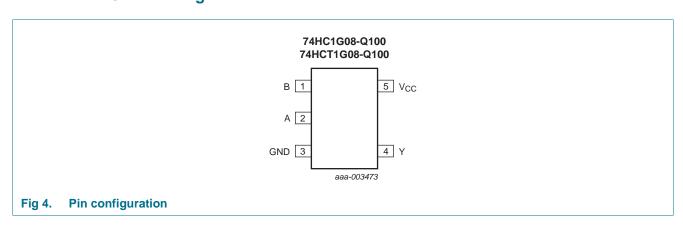

6.2 Pin description

Table 3. Pin description

Symbol	Pin	Description
В	1	data input
Α	2	data input
GND	3	ground (0 V)
Υ	4	data output
V _{CC}	5	supply voltage

7. Functional description

Table 4. Function table

H = HIGH voltage level; L = LOW voltage level

Input		Output
Α	В	Υ
L	L	L
L	Н	L
Н	L	L
Н	Н	Н

8. Limiting values

Table 5. Limiting values

In accordance with the Absolute Maximum Rating System (IEC 60134). Voltages are referenced to GND (ground = 0 V). [1]

Symbol	Parameter	Conditions	Min	Max	Unit
V_{CC}	supply voltage		-0.5	+7.0	V
I _{IK}	input clamping current	$V_I < -0.5 \text{ V or } V_I > V_{CC} + 0.5 \text{ V}$	-	±20	mA
I _{OK}	output clamping current	$V_O < -0.5 \text{ V or } V_O > V_{CC} + 0.5 \text{ V}$	-	±20	mA
Io	output current	$-0.5 \text{ V} < \text{V}_{\text{O}} < \text{V}_{\text{CC}} + 0.5 \text{ V}$	-	±12.5	mA
I _{CC}	supply current		-	25	mA
I_{GND}	ground current		-25	-	mA
T _{stg}	storage temperature		-65	+150	°C
P _{tot}	total power dissipation	T_{amb} = -40 °C to +125 °C	[2] -	200	mW

^[1] The input and output voltage ratings may be exceeded if the input and output current ratings are observed.

^[2] Above 55 $^{\circ}$ C the value of P_{tot} derates linearly with 2.5 mW/K.

9. Recommended operating conditions

Table 6. Recommended operating conditions

Voltages are referenced to GND (ground = 0 V).

Symbol Parameter		Conditions	ditions 74HC1G08-Q100 7					00	Unit
			Min	Тур	Max	Min	Тур	Max	
V_{CC}	supply voltage		2.0	5.0	6.0	4.5	5.0	5.5	V
VI	input voltage		0	-	V_{CC}	0	-	V_{CC}	V
Vo	output voltage		0	-	V_{CC}	0	-	V_{CC}	V
T _{amb}	ambient temperature		-40	+25	+125	-40	+25	+125	°C
$\Delta t / \Delta V$	input transition rise	$V_{CC} = 2.0 \text{ V}$	-	-	625	-	-	-	ns/V
	and fall rate	$V_{CC} = 4.5 \text{ V}$	-	-	139	-	-	139	ns/V
		$V_{CC} = 6.0 \text{ V}$	-	-	83	-	-	-	ns/V

10. Static characteristics

Table 7. Static characteristics

Voltages are referenced to GND (ground = 0 V). All typical values are measured at T_{amb} = 25 °C.

Symbol	Parameter	Conditions	-40	°C to +	85 °C	–40 °C	-40 °C to +125 °C		
				Тур	Max	Min	Max		
74HC1G0	8-Q100		'	'	'	'	'	•	
V_{IH}	HIGH-level input	V _{CC} = 2.0 V	1.5	1.2	-	1.5	-	V	
voltage	voltage	V _{CC} = 4.5 V	3.15	2.4	-	3.15	-	V	
		$V_{CC} = 6.0 \text{ V}$	4.2	3.2	-	4.2	-	V	
V_{IL}	LOW-level input	V _{CC} = 2.0 V	-	8.0	0.5	-	0.5	V	
voltage	voltage	V _{CC} = 4.5 V	-	2.1	1.35	-	1.35	V	
		$V_{CC} = 6.0 \text{ V}$	-	2.8	1.8	-	1.8	V	
V_{OH}	HIGH-level output	$V_I = V_{IH}$ or V_{IL}							
voltage	$I_O = -20 \mu A; V_{CC} = 2.0 V$	1.9	2.0	-	1.9	-	V		
		$I_O = -20 \mu A; V_{CC} = 4.5 V$	4.4	4.5	-	4.4	-	V	
		$I_O = -20 \mu A; V_{CC} = 6.0 V$	5.9	6.0	-	5.9	-	V	
		$I_{O} = -2.0 \text{ mA}; V_{CC} = 4.5 \text{ V}$	4.13	4.32	-	3.7	-	V	
		$I_{O} = -2.6 \text{ mA}; V_{CC} = 6.0 \text{ V}$	5.63	5.81	-	5.2	-	V	
V_{OL}	LOW-level output	$V_I = V_{IH}$ or V_{IL}							
	voltage	$I_O = 20 \mu A; V_{CC} = 2.0 V$	-	0	0.1	-	0.1	V	
		$I_O = 20 \mu A; V_{CC} = 4.5 V$	-	0	0.1	-	0.1	V	
		$I_O = 20 \mu A; V_{CC} = 6.0 \text{ V}$	-	0	0.1	-	0.1	V	
		$I_O = 2.0 \text{ mA}; V_{CC} = 4.5 \text{ V}$	-	0.15	0.33	-	0.4	V	
		$I_{O} = 2.6 \text{ mA}; V_{CC} = 6.0 \text{ V}$	-	0.16	0.33	-	0.4	V	
I _I	input leakage current	$V_I = V_{CC}$ or GND; $V_{CC} = 6.0 \text{ V}$	-	-	1.0	-	1.0	μΑ	
I _{CC}	supply current	$V_I = V_{CC}$ or GND; $I_O = 0$ A; $V_{CC} = 6.0 \text{ V}$	-	-	10	-	20	μΑ	
Cı	input capacitance		-	1.5	-	-	-	pF	

 Table 7.
 Static characteristics ...continued

Voltages are referenced to GND (ground = 0 V). All typical values are measured at T_{amb} = 25 °C.

Symbol	Parameter	Conditions	-40	°C to +	85 °C	–40 °C	to +125 °C	Unit
			Min	Тур	Max	Min	Max	
74HCT1G	08-Q100							
V _{IH}	HIGH-level input voltage	$V_{CC} = 4.5 \text{ V to } 5.5 \text{ V}$	2.0	1.6	-	2.0	-	V
V _{IL}	LOW-level input voltage	$V_{CC} = 4.5 \text{ V to } 5.5 \text{ V}$	-	1.2	8.0	-	0.8	V
V _{OH}	HIGH-level output	$V_I = V_{IH}$ or V_{IL}						
	voltage	$I_O = -20 \mu A; V_{CC} = 4.5 V$	4.4	4.5	-	4.4	-	V
		$I_{O} = -2.0 \text{ mA}; V_{CC} = 4.5 \text{ V}$	4.13	4.32	-	3.7	-	V
V_{OL}	LOW-level output	$V_I = V_{IH}$ or V_{IL}						
	voltage	$I_O = 20 \mu A; V_{CC} = 4.5 V$	-	0	0.1	-	0.1	V
		$I_O = 2.0 \text{ mA}; V_{CC} = 4.5 \text{ V}$	-	0.15	0.33	-	0.4	V
l _l	input leakage current	$V_I = V_{CC}$ or GND; $V_{CC} = 5.5 \text{ V}$	-	-	1.0	-	1.0	μΑ
I _{CC}	supply current	$V_1 = V_{CC}$ or GND; $I_0 = 0$ A; $V_{CC} = 5.5 \text{ V}$	-	-	10	-	20	μΑ
Δl _{CC}	additional supply current	per input; $V_{CC} = 4.5 \text{ V to } 5.5 \text{ V};$ $V_I = V_{CC} - 2.1 \text{ V};$ $I_O = 0 \text{ A}$	-	-	500	-	850	μΑ
Cı	input capacitance		-	1.5	-	-	-	рF

11. Dynamic characteristics

Table 8. Dynamic characteristics

GND = 0 V; $t_r = t_f \le 6.0$ ns; All typical values are measured at $T_{amb} = 25$ °C. For test circuit see <u>Figure 6</u>

Symbol	Parameter	Conditions		-40	°C to +8	35 °C	-40 °C	to +125 °C	Unit
				Min	Тур	Max	Min	Max	
74HC1G	08-Q100				'	'	'		
t _{pd}	propagation delay	A and B to Y; see Figure 5	<u>[1]</u>						
		$V_{CC} = 2.0 \text{ V}; C_L = 50 \text{ pF}$		-	25	115	-	135	ns
		$V_{CC} = 4.5 \text{ V}; C_L = 50 \text{ pF}$		-	9	23	-	27	ns
		$V_{CC} = 5.0 \text{ V}; C_L = 15 \text{ pF}$		-	7	-	-	-	ns
		$V_{CC} = 6.0 \text{ V}; C_L = 50 \text{ pF}$		-	8	20	-	23	ns
C_{PD}	power dissipation capacitance	$V_I = GND \text{ to } V_{CC}$	[2]	-	19	-	-	-	pF
74HCT10	G08-Q100								
t _{pd}	propagation delay	A and B to Y; see Figure 5	<u>[1]</u>						
		$V_{CC} = 4.5 \text{ V}; C_L = 50 \text{ pF}$		-	11	23	-	27	ns
		$V_{CC} = 5.0 \text{ V}; C_L = 15 \text{ pF}$		-	11	-	-	-	ns

 Table 8.
 Dynamic characteristics ...continued

GND = 0 V; $t_r = t_f \le 6.0$ ns; All typical values are measured at $T_{amb} = 25$ °C. For test circuit see Figure 6

Symbol	Parameter	Conditions		-40 °C to +85 °C		Unit			
				Min	Тур	Max	Min	Max	
C_{PD}	power dissipation capacitance	$V_I = GND$ to $V_{CC} - 1.5 V$	[2]	-	21	-	-	-	pF

[1] t_{pd} is the same as t_{PLH} and t_{PHL} .

[2] $\,$ $\,$ $\,$ $\,$ $\,$ $\,$ $\,$ $\,$ C_{PD} is used to determine the dynamic power dissipation P_D (μ W).

 $P_D = C_{PD} \times V_{CC}^2 \times f_i + \sum (C_L \times V_{CC}^2 \times f_o)$ where:

f_i = input frequency in MHz


f_o = output frequency in MHz

C_L = output load capacitance in pF

V_{CC} = supply voltage in Volts


 $\sum (C_L \times V_{CC}^2 \times f_o) = \text{sum of outputs}$

12. Waveforms



For 74HC1G08-Q100: $V_M = 0.5 \times V_{CC}$; $V_I = GND$ to V_{CC} For 74HCT1G08-Q100: $V_M = 1.3$ V; $V_I = GND$ to 3.0 V





Test data is given in Table 8. Definitions for test circuit:

 $\ensuremath{C_L}$ = Load capacitance including jig and probe capacitance


 R_T = Termination resistance should be equal to the output impedance Z_o of the pulse generator

Fig 6. Test circuit for measuring switching times

13. Package outline

TSSOP5: plastic thin shrink small outline package; 5 leads; body width 1.25 mm

SOT353-1

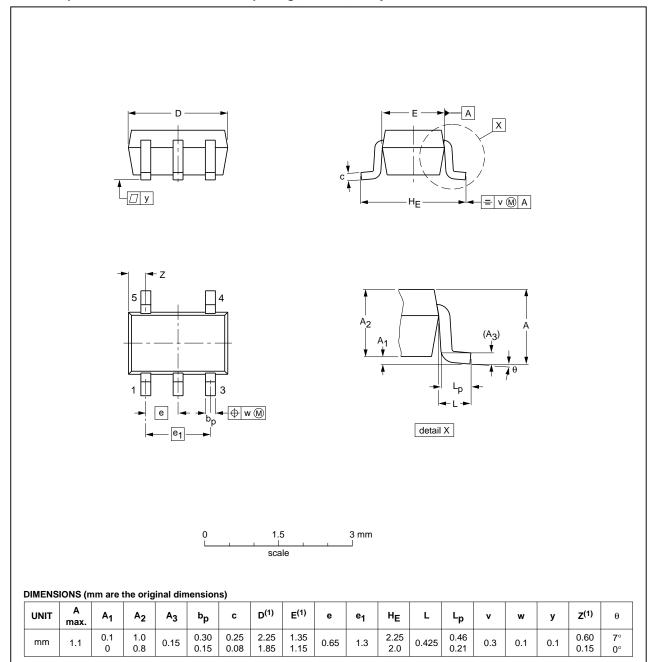

Note

1. Plastic or metal protrusions of 0.15 mm maximum per side are not included.

OUTLINE		REFER	ENCES	EUROPEAN	ISSUE DATE
VERSION	IEC	JEDEC	JEITA	PROJECTION	1330E DATE
SOT353-1		MO-203	SC-88A		-00-09-01 03-02-19

Fig 7. Package outline SOT353-1 (TSSOP5)

74HC_HCT1G08_Q100 All information provided in this document is subject to legal disclaimers.

NXP B.V. 2012. All rights reserved.

Plastic surface-mounted package; 5 leads

SOT753

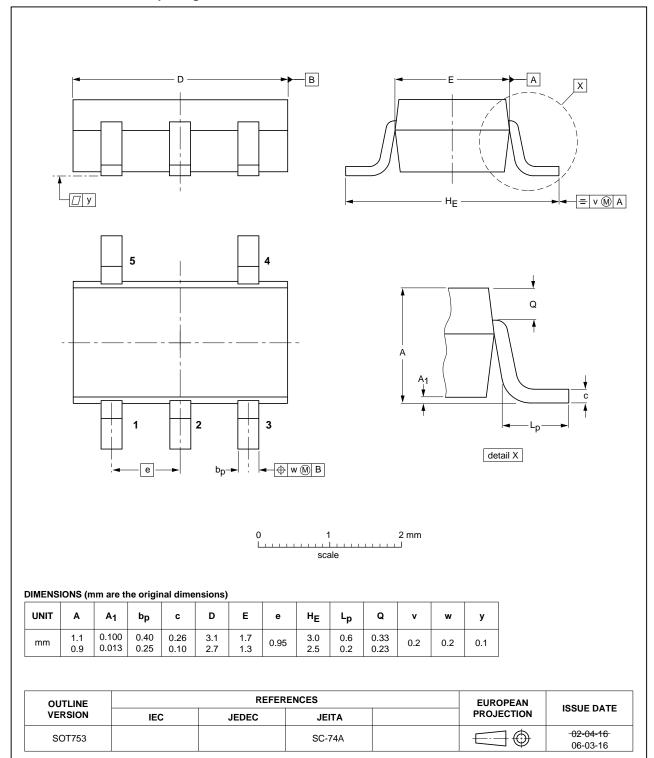


Fig 8. Package outline SOT753 (SC-74A)

74HC_HCT1G08_Q100

All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2012. All rights reserved.

14. Abbreviations

Table 9. Abbreviations

Acronym	Description
CMOS	Complementary Metal Oxide Semiconductor
TTL	Transistor-Transistor Logic
HBM	Human Body Model
ESD	ElectroStatic Discharge
MM	Machine Model
DUT	Device Under Test

15. Revision history

Table 10. Revision history

Document ID	Release date	Data sheet status	Change notice	Supersedes
74HC_HCT1G08_Q100 v.2	20120816	Product data sheet	-	74HC_HCT1G08_Q100 v.1
Modifications:	 Added pi 	in 1 location note (Table 2)		
74HC_HCT1G08_Q100 v.1	20120605	Product data sheet	-	-

16. Legal information

16.1 Data sheet status

Document status[1][2]	Product status[3]	Definition
Objective [short] data sheet	Development	This document contains data from the objective specification for product development.
Preliminary [short] data sheet	Qualification	This document contains data from the preliminary specification.
Product [short] data sheet	Production	This document contains the product specification.

- [1] Please consult the most recently issued document before initiating or completing a design.
- [2] The term 'short data sheet' is explained in section "Definitions"
- [3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the Internet at URL http://www.nxp.com.

16.2 Definitions

Draft — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. NXP Semiconductors does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

Short data sheet — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local NXP Semiconductors sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

Product specification — The information and data provided in a Product data sheet shall define the specification of the product as agreed between NXP Semiconductors and its customer, unless NXP Semiconductors and customer have explicitly agreed otherwise in writing. In no event however, shall an agreement be valid in which the NXP Semiconductors product is deemed to offer functions and qualities beyond those described in the Product data sheet.

16.3 Disclaimers

Limited warranty and liability — Information in this document is believed to be accurate and reliable. However, NXP Semiconductors does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. NXP Semiconductors takes no responsibility for the content in this document if provided by an information source outside of NXP Semiconductors.

In no event shall NXP Semiconductors be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation - lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Notwithstanding any damages that customer might incur for any reason whatsoever, NXP Semiconductors' aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the *Terms and conditions of commercial sale* of NXP Semiconductors.

Right to make changes — NXP Semiconductors reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

Semiconductors product has been qualified for use in automotive applications. Unless otherwise agreed in writing, the product is not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of an NXP Semiconductors product can reasonably be expected to result in personal injury, death or severe property or environmental damage. NXP Semiconductors and its suppliers accept no liability for

inclusion and/or use of NXP Semiconductors products in such equipment or

applications and therefore such inclusion and/or use is at the customer's own

Suitability for use in automotive applications — This NXP

risk. **Applications** — Applications that are described herein for any of these products are for illustrative purposes only. NXP Semiconductors makes no representation or warranty that such applications will be suitable for the

specified use without further testing or modification.

Customers are responsible for the design and operation of their applications and products using NXP Semiconductors products, and NXP Semiconductors accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the NXP Semiconductors product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products.

NXP Semiconductors does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using NXP Semiconductors products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). NXP does not accept any liability in this respect.

Limiting values — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) will cause permanent damage to the device. Limiting values are stress ratings only and (proper) operation of the device at these or any other conditions above those given in the Recommended operating conditions section (if present) or the Characteristics sections of this document is not warranted. Constant or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the device.

Terms and conditions of commercial sale — NXP Semiconductors products are sold subject to the general terms and conditions of commercial sale, as published at http://www.nxp.com/profile/terms, unless otherwise agreed in a valid written individual agreement. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. NXP Semiconductors hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of NXP Semiconductors products by customer.

NXP Semiconductors

74HC1G08-Q100; 74HCT1G08-Q100

2-input AND gate

No offer to sell or license — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

Export control — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from competent authorities.

Translations — A non-English (translated) version of a document is for reference only. The English version shall prevail in case of any discrepancy between the translated and English versions.

16.4 Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

17. Contact information

For more information, please visit: http://www.nxp.com

For sales office addresses, please send an email to: salesaddresses@nxp.com

74HC1G08-Q100; 74HCT1G08-Q100

2-input AND gate

18. Contents

1	General description 1
2	Features and benefits
3	Ordering information 1
4	Marking 2
5	Functional diagram 2
6	Pinning information 2
6.1	Pinning
6.2	Pin description
7	Functional description 3
8	Limiting values 3
9	Recommended operating conditions 4
10	Static characteristics 4
11	Dynamic characteristics 5
12	Waveforms 6
13	Package outline
14	Abbreviations 9
15	Revision history 9
16	Legal information
16.1	Data sheet status
16.2	Definitions
16.3	Disclaimers
16.4	Trademarks11
17	Contact information 11
12	Contents 12

Please be aware that important notices concerning this document and the product(s) described herein, have been included in section 'Legal information'.