

February 2015

# Chip Beads

For general signal line

**HF-ACB** Series

# HFxxACB2012 Type

HFxxACB2012

[0805 inch]\*

\* Dimensions Code JIS[EIA]

### **REMINDERS FOR USING THESE PRODUCTS**

Before using these products, be sure to request the delivery specifications.

### SAFETY REMINDERS

Please pay sufficient attention to the warnings for safe designing when using these products.

### **▲** REMINDERS

O The storage period is less than 12 months. Be sure to follow the storage conditions (Temperature: 5 to 40°C, Humidity: 10 to 75% RH or less).

If the storage period elapses, the soldering of the terminal electrodes may deteriorate.

- O Do not use or store in locations where there are conditions such as gas corrosion (salt, acid, alkali, etc.).
- O Before soldering, be sure to preheat components.
- The preheating temperature should be set so that the temperature difference between the solder temperature and chip temperature does not exceed 150°C.
- Soldering corrections after mounting should be within the range of the conditions determined in the specifications.
  If overheated, a short circuit, performance deterioration, or lifespan shortening may occur.
- When embedding a printed circuit board where a chip is mounted to a set, be sure that residual stress is not given to the chip due to the overall distortion of the printed circuit board and partial distortion such as at screw tightening portions.
- Self heating (temperature increase) occurs when the power is turned ON, so the tolerance should be sufficient for the set thermal design.
- Carefully lay out the coil for the circuit board design of the non-magnetic shield type.
  A malfunction may occur due to magnetic interference.
- Use a wrist band to discharge static electricity in your body through the grounding wire.
- O Do not expose the products to magnets or magnetic fields.
- O Do not use for a purpose outside of the contents regulated in the delivery specifications.
- The products listed on this catalog are intended for use in general electronic equipment (AV equipment, telecommunications equipment, home appliances, amusement equipment, computer equipment, personal equipment, office equipment, measurement equipment, industrial robots) under a normal operation and use condition.

The products are not designed or warranted to meet the requirements of the applications listed below, whose performance and/or quality require a more stringent level of safety or reliability, or whose failure, malfunction or trouble could cause serious damage to society, person or property.

If you intend to use the products in the applications listed below or if you have special requirements exceeding the range or conditions set forth in the each catalog, please contact us.

- (1) Aerospace/Aviation equipment
- (2) Transportation equipment (cars, electric trains, ships, etc.)
- (3) Medical equipment
- (4) Power-generation control equipment
- (5) Atomic energy-related equipment
- (6) Seabed equipment
- (7) Transportation control equipment

- (8) Public information-processing equipment
- (9) Military equipment
- (10) Electric heating apparatus, burning equipment
- (11) Disaster prevention/crime prevention equipment
- (12) Safety equipment
- (13) Other applications that are not considered general-purpose applications

When designing your equipment even for general-purpose applications, you are kindly requested to take into consideration securing protection circuit/device or providing backup circuits in your equipment.

**公TDK** 

### **Chip Beads**

For general signal line

# **Overview of HFxxACB2012 Type**

### FEATURES

○ Noise reduction solution for general signal line.


O Achieves various frequency characteristics by using 3 materials with different features.

O There is no directivity.

#### APPLICATION

Signal line noise removal for DSCs, DVCs, PCs, TVs, printers, game machines, smart grids, wireless base stations, industrial equipment, automobiles, etc.

### PART NUMBER CONSTRUCTION



#### OPERATING TEMPERATURE RANGE, PACKAGE QUANTITY, PRODUCT WEIGHT

	Temperat	ure range	Package quantity	Individual weight	
Туре	Operating temperature* (°C)	Storage temperature** (°C)	(pieces/reel)	(mg)	
HFxxACB2012	-40 to +125	-40 to +125	2,000	10	

\* Operating temperature range includes self-temperature rise.

\*\* The Storage temperature range is for after the circuit board is mounted.


RoHS Directive Compliant Product: See the following for more details related to RoHS Directive compliant products. http://product.tdk.com/en/environment/rohs/
 Halogen-free: Indicates that CI content is less than 900ppm, Br content is less than 900ppm, and that the total CI and Br content is less than 1500ppm.

A Please be sure to request delivery specifications that provide further details on the features and specifications of the products for proper and safe use. Please note that the contents may change without any prior notice due to reasons such as upgrading.

**公ΤDK** 

## HFxxACB2012 Type

RECOMMENDED REFLOW PROFILE

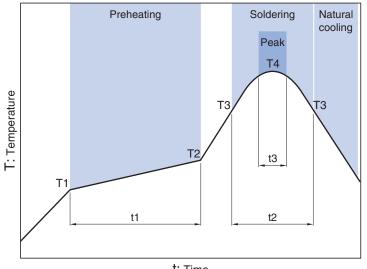

t: Time

Preheatin	g		Soldering	3	Peak	
Temp.		Time	Temp.	Time	Temp.	Time
T1	T2	t1	Т3	t2	T4	t3
150°C	180°C	60 to 120s	230°C	30 to 60s	250 to 260°C	10s

A Please be sure to request delivery specifications that provide further details on the features and specifications of the products for proper and safe use. Please note that the contents may change without any prior notice due to reasons such as upgrading.


**⊗TDK** 

**⊗TDK** 

### EMC Components

### HFxxACB2012 Type


SHAPE & DIMENSIONS





Dimensions in mm

#### RECOMMENDED LAND PATTERN



Dimensions in mm

A Please be sure to request delivery specifications that provide further details on the features and specifications of the products for proper and safe use. Please note that the contents may change without any prior notice due to reasons such as upgrading.

(6/8)

# HFxxACB2012 Type

### ELECTRICAL CHARACTERISTICS

### CHARACTERISTICS SPECIFICATION TABLE


Impedance		DC resistance	Rated current	Part No.
[100MHz]				
<b>(</b> Ω <b>)</b>	Tolerance	<b>(</b> Ω <b>)max.</b>	(mA)max.	
10	±25%	0.1	600	HF70ACB201209-T
11	±25%	0.1	600	HF50ACB201209-T
7	±25%	0.1	600	HF30ACB201209-T

A Please be sure to request delivery specifications that provide further details on the features and specifications of the products for proper and safe use. Please note that the contents may change without any prior notice due to reasons such as upgrading.


### HFxxACB2012 Type

### **ELECTRICAL CHARACTERISTICS**

#### **Z, X, R VS. FREQUENCY CHARACTERISTICS**

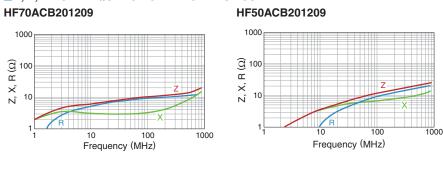





A Please be sure to request delivery specifications that provide further details on the features and specifications of the products for proper and safe use. Please note that the contents may change without any prior notice due to reasons such as upgrading.


**⊗TDK** 

(8/8)

### HFxxACB2012 Type

### PACKAGING STYLE


#### **REEL DIMENSIONS**




Type W1		W2	N
HFxxACB2012	8.4+2.0/-0.0	14.4max. ø60mir	

Dimensions in mm

#### **TAPE DIMENSIONS**

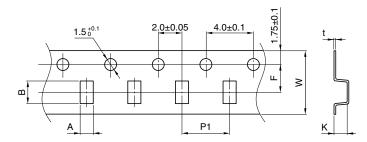

Dimensions in m					ensions in mm		
Туре	A	В	F	P1	W	K	t
HFxxACB2012	1.4±0.1	2.25±0.1	3.5±0.05	4.0±0.1	8.0±0.3	1.25max.	0.3max.



Dimensions in mm

Please be sure to request delivery specifications that provide further details on the features and specifications of the products for proper and safe use. Please note that the contents may change without any prior notice due to reasons such as upgrading.