

April 2016

## **Inductors for Power Circuits**

**Wound Ferrite** 

**VLS-CX Series** 

# VLS252010CX Type

VLS252010CX



#### REMINDERS FOR USING THESE PRODUCTS

Before using these products, be sure to request the delivery specifications.

#### SAFETY REMINDERS

Please pay sufficient attention to the warnings for safe designing when using these products.

⚠ REMINDERS	
The storage period is less than 12 months. Be sure to follow the storage conditions (Temperature: 5 to 40°C, Humidity: 10 to 75% or less).  If the storage period elapses, the soldering of the terminal electrodes may deteriorate.	RH
Do not use or store in locations where there are conditions such as gas corrosion (salt, acid, alkali, etc.).	
Before soldering, be sure to preheat components.  The preheating temperature should be set so that the temperature difference between the solder temperature and chip temperature does not exceed 150°C.	re
Soldering corrections after mounting should be within the range of the conditions determined in the specifications.  If overheated, a short circuit, performance deterioration, or lifespan shortening may occur.	
When embedding a printed circuit board where a chip is mounted to a set, be sure that residual stress is not given to the chip due the overall distortion of the printed circuit board and partial distortion such as at screw tightening portions.	to
Self heating (temperature increase) occurs when the power is turned ON, so the tolerance should be sufficient for the set thermal design.	
Carefully lay out the coil for the circuit board design of the non-magnetic shield type.  A malfunction may occur due to magnetic interference.	
Use a wrist band to discharge static electricity in your body through the grounding wire.	
Do not expose the products to magnets or magnetic fields.	
Do not use for a purpose outside of the contents regulated in the delivery specifications.	
The products listed on this catalog are intended for use in general electronic equipment (AV equipment, telecommunications equipment, home appliances, amusement equipment, computer equipment, personal equipment, office equipment, measurement equipment, industrial robots) under a normal operation and use condition.  The products are not designed or warranted to meet the requirements of the applications listed below, whose performance and/or quality require a more stringent level of safety or reliability, or whose failure, malfunction or trouble could cause serious damage to	
society, person or property.  If you intend to use the products in the applications listed below or if you have special requirements exceeding the range or conditions to set forth in the each catalog, please contact us.	ons

- (1) Aerospace/Aviation equipment
- (2) Transportation equipment (cars, electric trains, ships, etc.)
- (3) Medical equipment
- (4) Power-generation control equipment
- (5) Atomic energy-related equipment
- (6) Seabed equipment
- (7) Transportation control equipment

- (8) Public information-processing equipment
- (9) Military equipment
- (10) Electric heating apparatus, burning equipment
- (11) Disaster prevention/crime prevention equipment
- (12) Safety equipment
- (13) Other applications that are not considered general-purpose applications

When designing your equipment even for general-purpose applications, you are kindly requested to take into consideration securing protection circuit/device or providing backup circuits in your equipment.

INDUCTORS

### **Inductors for Power Circuits**

**Wound Ferrite** 

Product compatible with RoHS directive
Halogen-free
Compatible with lead-free solders

# Overview of VLS252010CX Type


#### **FEATURES**

- Magnetic shield type wound inductor for power circuits using a ferrite magnetic material.
- O High magnetic shield construction and compatible with high-density mounting.
- O Larger current and lower Rdc were achieved by optimizing the ferrite core figure.

#### APPLICATION

Smart phones, tablet terminals, HDDs, SSDs, DVCs, DSCs, mobile display panels, portable game devices, compact power supply modules, other

#### PART NUMBER CONSTRUCTION



#### ■ OPERATING TEMPERATURE RANGE, PACKAGE QUANTITY, PRODUCT WEIGHT

	Temperat	ure range	Package quantity	Individual weight
Туре	Operating temperature*			
	(°C)	(°C)	(pieces/reel)	(mg)
VLS252010CX	-40 to +105	-40 to +105	2000	24


<sup>\*</sup> Operating temperature range includes self-temperature rise.

<sup>\*\*</sup> The Storage temperature range is for after the circuit board is mounted.

RoHS Directive Compliant Product: See the following for more details related to RoHS Directive compliant products. http://product.tdk.com/en/environment/rohs/


O Halogen-free: Indicates that CI content is less than 900ppm, Br content is less than 900ppm, and that the total CI and Br content is less than 1500ppm.

#### ■ RECOMMENDED REFLOW PROFILE

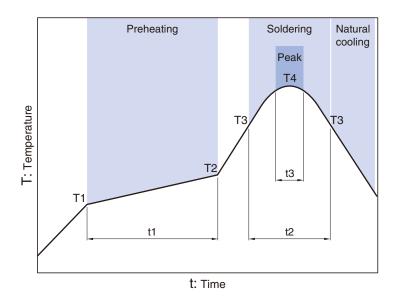


Preheating		Soldering		Peak		
Temp. Time		Temp.	Time	Temp.	Time	
T1	T2	t1	T3	t2	T4	t3
150°C	180°C	60 to 120s	230°C	30s	260°C	10s

#### ■SHAPE & DIMENSIONS

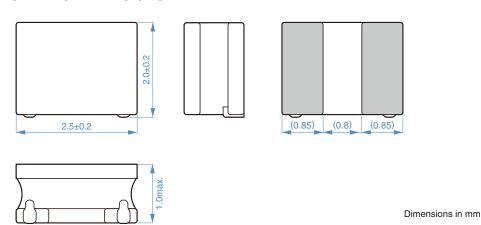



# ■ RECOMMENDED LAND PATTERN



Dimensions in mm

hease be sure to request delivery specifications that provide further details on the features and specifications of the products for proper and safe use. Please note that the contents may change without any prior notice due to reasons such as upgrading.

#### **■ ELECTRICAL CHARACTERISTICS**

#### **CHARACTERISTICS SPECIFICATION TABLE**

L		L measuring frequency	DC resista	ance	Rated cur	rent*	Part No.		
			4-5	4- 3-	Isat	Itemp	Isat	Itemp	
(μH)	Tolerance	(MHz)	( $\Omega$ )max.	( $\Omega$ )typ.	(A)max.	(A)max.	(A)typ.	(A)typ.	
0.47	±20%	1	0.038	0.032	3.08	3.22	3.42	3.78	VLS252010CX-R47M
0.68	±20%	1	0.050	0.042	2.52	2.62	2.80	3.08	VLS252010CX-R68M
1.0	±20%	1	0.065	0.054	2.25	2.29	2.50	2.69	VLS252010CX-1R0M
1.5	±20%	1	0.086	0.072	1.75	1.90	1.95	2.24	VLS252010CX-1R5M
2.2	±20%	1	0.126	0.105	1.51	1.58	1.68	1.86	VLS252010CX-2R2M
3.3	±20%	1	0.186	0.155	1.30	1.25	1.40	1.47	VLS252010CX-3R3M
4.7	±20%	1	0.235	0.196	0.97	1.11	1.10	1.30	VLS252010CX-4R7M
6.8	±20%	1	0.372	0.310	0.86	0.86	0.96	1.01	VLS252010CX-6R8M
10	±20%	1	0.580	0.483	0.66	0.71	0.75	0.83	VLS252010CX-100M
15	±20%	1	0.914	0.762	0.56	0.56	0.66	0.66	VLS252010CX-150M
22	±20%	1	1.364	1.137	0.46	0.45	0.56	0.53	VLS252010CX-220M

<sup>\*</sup> Rated current: smaller value of either Isat or Itemp.

Isat: When based on the inductance change rate (30% below the nominal L value)

Itemp: When based on the temperature increase (Temperature increase of 40°C by self heating)


#### O Measurement equipment

Measurement item	Product No.	Manufacturer
L	4194A	Keysight Technologies
DC resistance	VP-2941A	Panasonic
Rated current Isat	4285A+42841A+42842C	Keysight Technologies

<sup>\*</sup> Equivalent measurement equipment may be used.

#### **■ ELECTRICAL CHARACTERISTICS**

#### ☐ L FREQUENCY CHARACTERISTICS GRAPH

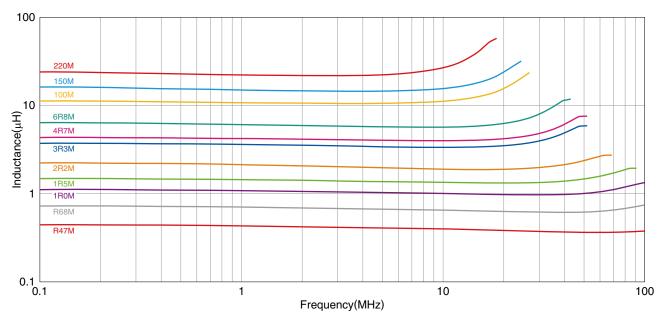


#### $\bigcirc \ \text{Measurement equipment}$

Product No.	Manufacturer
4294A	Keysight Technologies

<sup>\*</sup> Equivalent measurement equipment may be used.

#### **■ ELECTRICAL CHARACTERISTICS**

#### □INDUCTANCE VS. DC BIAS CHARACTERISTICS GRAPH

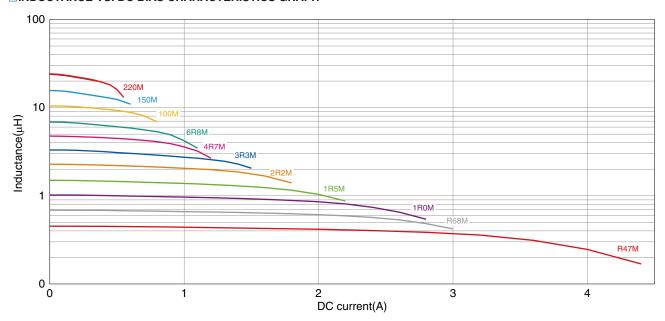


 $\bigcirc \ {\it Measurement equipment}$ 

Product No.	Manufacturer
4285A+42841A+42842C	Keysight Technologies

<sup>\*</sup> Equivalent measurement equipment may be used.

#### **■PACKAGING STYLE**


#### **REEL DIMENSIONS**



Type	Α	W1	W2	N	Е
VLS252010CX	ø180	9	13	ø60	0.5

<sup>\*</sup> These values are typical values.

#### **TAPE DIMENSIONS**





Dimensions in mm

Dimensions in mm

Type	Α	В	øD0	E	F	P0	P1	P2	W	K	t
VLS252010CX	2.3	2.8	1.5+0.1/-0	1.75±0.1	3.5±0.05	4.0±0.1	4.0±0.1	2.0±0.05	8.0±0.2	1.15	0.25