

## **FLORENCE2-Z90**

~90° wide beam

#### **TECHNICAL SPECIFICATIONS:**


Dimensions	285.0 x 64.2 mm
Height	8.1 mm
Fastening	screw
Colour	clear
Box size	398 x 298 x 140 mm
Box weight	4.1 kg
Quantity in Box	66 pcs
ROHS compliant	yes 🛈



PRODUCT DATASHEET F16007\_FLORENCE2-Z90

### **MATERIAL SPECIFICATIONS:**

**Component** FLORENCE2-Z90 **Type** Lens array **Material** PMMA **Colour** clear

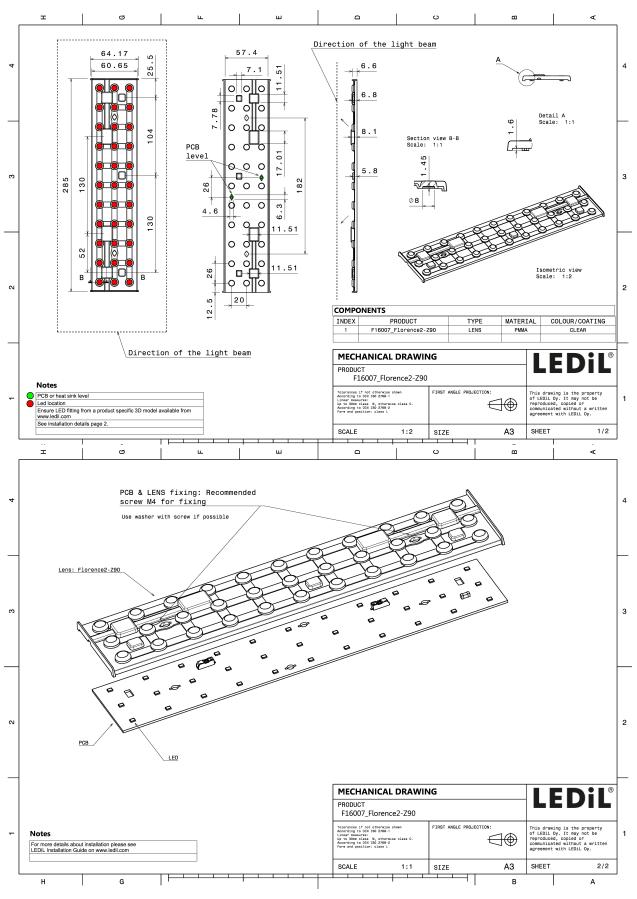

R

Last update: 05/04/2018 Subject to change without prior notice LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.



## PHOTOMETRIC DATA (MEASURED):

OSRAM Opto Semiconductors			90* 50*
LED	Duris E5		75
FWHM	82.0°		
Efficiency	94 %		50° 50°
Peak intensity	0.600 cd/lm		
Required comp	onents:		er de la companya de
			30° <u>660</u> 30° 30°
PHILIP	S		
LED	Fortimo LED Line 1ft 1100lm 3R xV4		
FWHM	85.0°		751 72
Efficiency	94 %	and the second second	50* 50*
Peak intensity		and the second second	
Required comp			45° 460 45°
PHILIP			
			90* 90*
LED	Fortimo LED Line 1ft 650lm 3R xV4		75
FWHM	82.0°		200
Efficiency	94 %		
Peak intensity			57 400 57
Required comp	onents.		
			640
			30 <sup>4</sup> <u>15<sup>3</sup></u> 0 <sup>6</sup> 15 <sup>9</sup> 30 <sup>4</sup>
PHILIP	25		90*
LED	Fortimo LED Line 1ft 650lm 8x0 3R xV2/xV		
FWHM	85.0°		
Efficiency	94 %		50* 60*
Peak intensity			
Required comp	onents:		45° 440
			30* 15 <sup>5</sup> 0 <sup>5</sup> 15* 30*




## **PHOTOMETRIC DATA (MEASURED):**


### **PHILIPS** LED Fortimo LED Line 2ft 2200lm 3R HV4 FWHM 85.0° Efficiency 94 % Peak intensity 0.580 cd/lm Required components: SAMSUNG LED LM28xB Series FWHM 82.0° Efficiency 93 % Peak intensity 0.600 cd/lm Required components: **SAMSUNG** LED LM561B Plus FWHM 81.0° Efficiency 94 % Peak intensity 0.620 cd/lm Required components: SEOUL SEOUL SEMICONDUCTOR LED **SEOUL 5630** FWHM 82.0° 94 % Efficiency Peak intensity 0.600 cd/lm Required components:



## PHOTOMETRIC DATA (MEASURED):

SEOUL		
SEOUL SEMICONDUCTOR		
LED	SunLike 3030	
FWHM	81.0°	
Efficiency	94 %	
Peak intensity	0.630 cd/lm	
Required components:		







## PHOTOMETRIC DATA (SIMULATED):

UMILE	DS	39° 39°
LED	LUXEON 5050	73 - 25
FWHM	84.0°	
Efficiency	94 %	
Peak intensity	0.590 cd/lm	
Required compor	ients:	
OSRAM Opto Semiconductors		90° 90°
LED	Duris S8	
FWHM	86.0°	
Efficiency	94 %	50 <sup>4</sup>
Peak intensity	0.550 cd/lm	
Required compor	ients:	
SEOUL SEMICONDUCTOR		92° - 92'
LED	SEOUL 3528	
FWHM	83.0°	
Efficiency	92 %	av <sup>300</sup>
Peak intensity	0.580 cd/lm	
Required compor	ients:	



#### **GENERAL INFORMATION:**

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

#### **MATERIALS:**

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

#### PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

#### **LEDIL Oy**

Joensuunkatu 13 FI-24240 SALO Finland

#### LEDiL Inc.

228 West Page Street Suite D Sycamore IL 60178 USA

#### Local sales and technical support www.ledil.com/ where\_to\_buy

Shipping locations Salo, Finland Hong Kong, China

Distribution Partners www.ledil.com/ where\_to\_buy