

"High Frequency Ceramic Solutions"

2450 MHz Antenna

P/N 2450AT18A0150

Detail Specification: 05/07/09

Page 1 of 3


General Specifications

Part Number	2450AT18A0150
Frequency Range	2375 - 2525 Mhz
Peak Gain	0.5 dBi typ. (XZ-V)
Average Gain	-0.5 dBi typ. (XZ-V)
Return Loss	9.5 dB min.

Input Power	2W max.
Impedance	50 Ω
Reel Quantity	3,000
Operating Temperature	-40 to +85°C
Storage Temperature	+5 to +35°C, Humidity 45-75%RH, 12 mos. max*


P/N Suffix	Packaging Style	Bulk	Suffix = S	Eg. 2450AT18A0150S
		T & R	Suffix = E	Eg. 2450AT18A0150E
	Termination Style	100% Tin	Suffix = None	Eg. 2450AT18A0150(E or S)
		Tin / Lead	Please consult Factory	

Terminal Configuration	
No.	Function
1	Feeding Point
2	NC



Mechanical Dimensions


	In	mm
L	0.126 \pm 0.008	3.20 \pm 0.20
W	0.063 \pm 0.008	1.60 \pm 0.20
T	0.051 +.004/-0.008	1.30 +0.1/-0.2
a	0.020 \pm 0.012	0.50 \pm 0.30

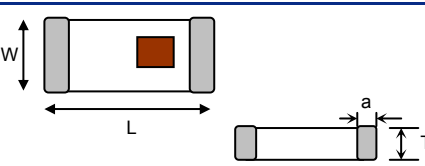

Mounting Considerations

Mount these devices with brown mark facing up. Units: mm

*Line width should be designed to provide 50 Ω impedance matching characteristics.

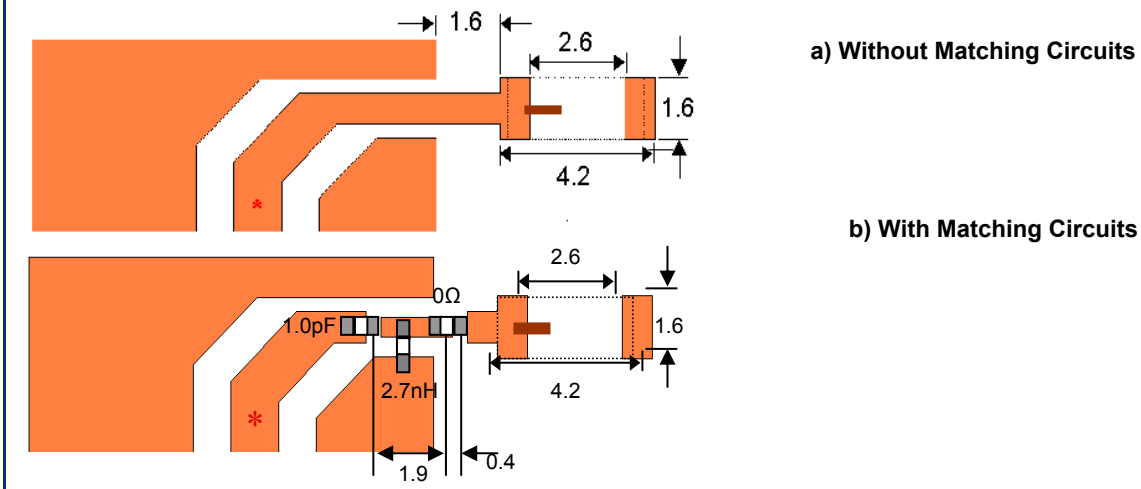

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.



www.johansontechnology.com

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

2009 Johanson Technology, Inc. All Rights Reserved

"High Frequency Ceramic Solutions"


2450 MHz Antenna

P/N 2450AT18A0150

Detail Specification: 05/07/09

Page 2 of 3

Typical Electrical Characteristics (T=25°C)

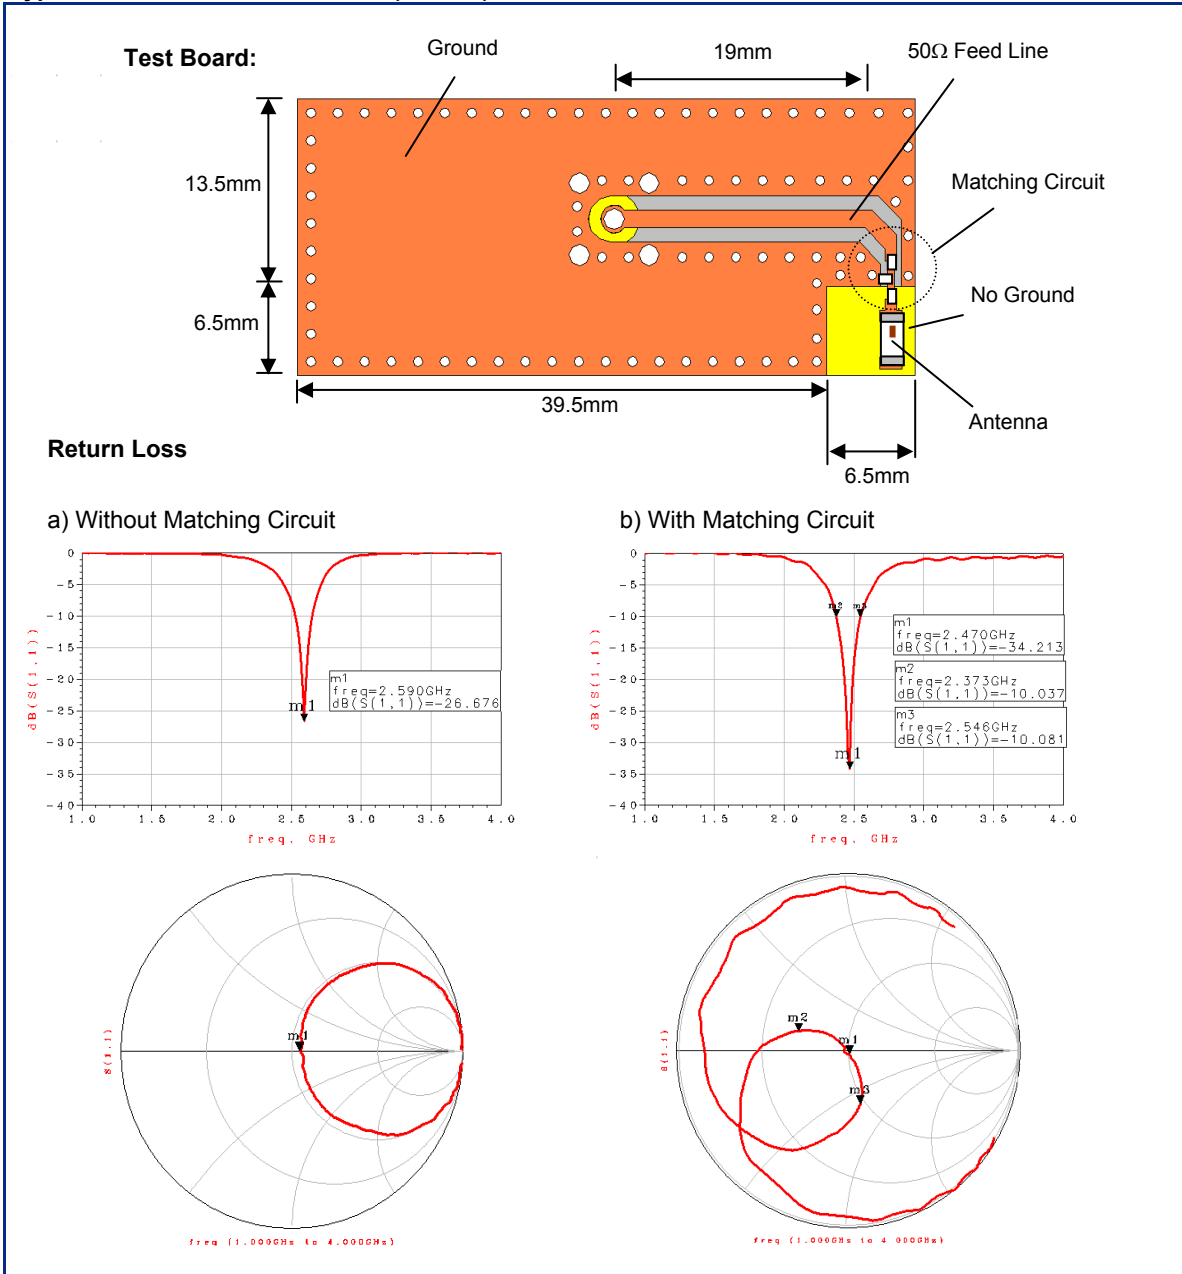

Johanson Technology, Inc. reserves the right to make design changes without notice.
All sales are subject to Johanson Technology, Inc. terms and conditions.



www.johansontechnology.com
4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

2009 Johanson Technology, Inc. All Rights Reserved

"High Frequency Ceramic Solutions"


2450 MHz Antenna

P/N 2450AT18A0150



Detail Specification: 05/07/09

Page 3 of 3



Typical Radiation Patterns

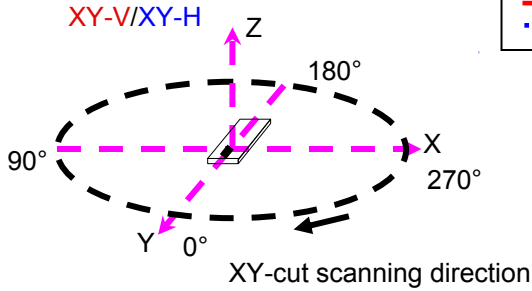


XY cut @2.45GHz
 — Vertical
 Horizontal

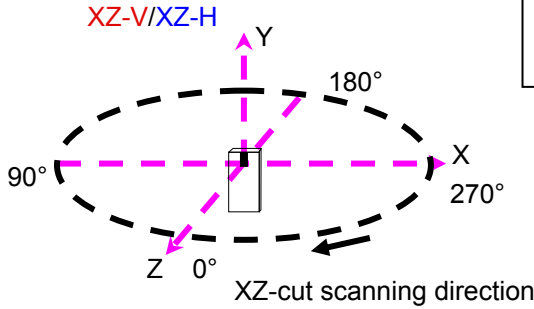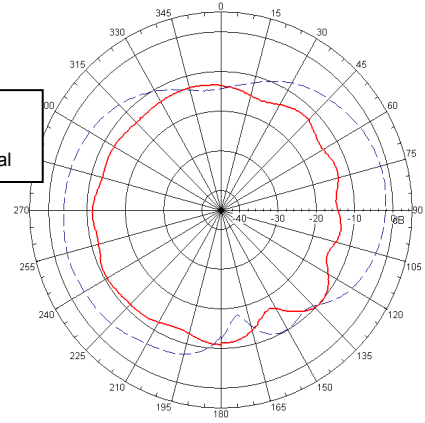

XZ cut @2.45GHz
 — Vertical
 Horizontal

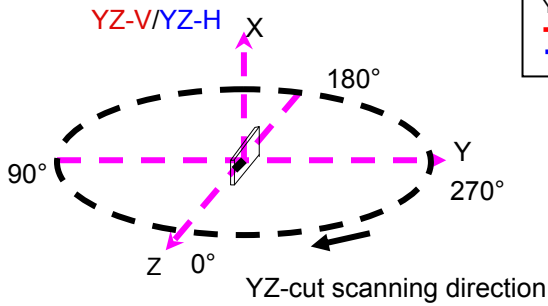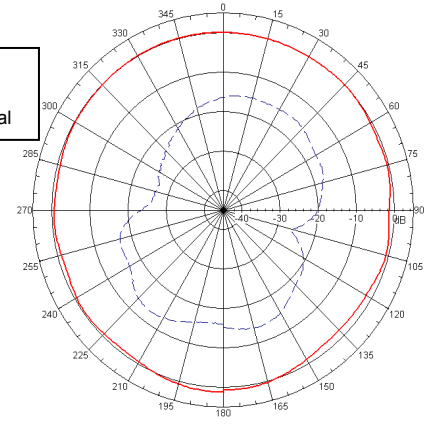

YZ cut @2.45GHz
 — Vertical
 Horizontal

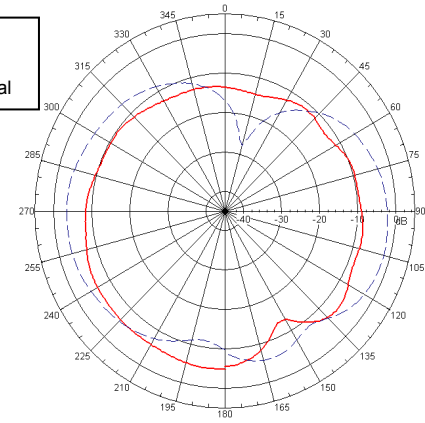

Johanson Technology, Inc. reserves the right to make design changes without notice.
 All sales are subject to Johanson Technology, Inc. terms and conditions.



www.johansontechnology.com
 4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

2009 Johanson Technology, Inc. All Rights Reserved