



SYMBOL DEFINITION		
A DIMENSION WITHOUT AN INSPECTION REPORT SYMBOL  DOES NOT REQUIRE INSPECTION. IT MAY BE CONTROLLED ON THE INDIVIDUAL COMPONENT DRAWING.	TOTAL NO OF INSPECTIONS REQUIRED	10
	LAST NO. USED	10

MISSING SYMBOLS		DWG STATUS					ZONE		REVISION HISTORY			AUTH	DR	APVD 1	APVD 2
NO MISSING SYMBOL NUMBER		DATE	STG	REV	N/P	CHG			CREATED TAXI DRAWING, 15491363 WAS SEPERATE DRAWING, RELEASED 13576952			277670	CJP	CJP	GCD
		23FE06	R	01	-	-									

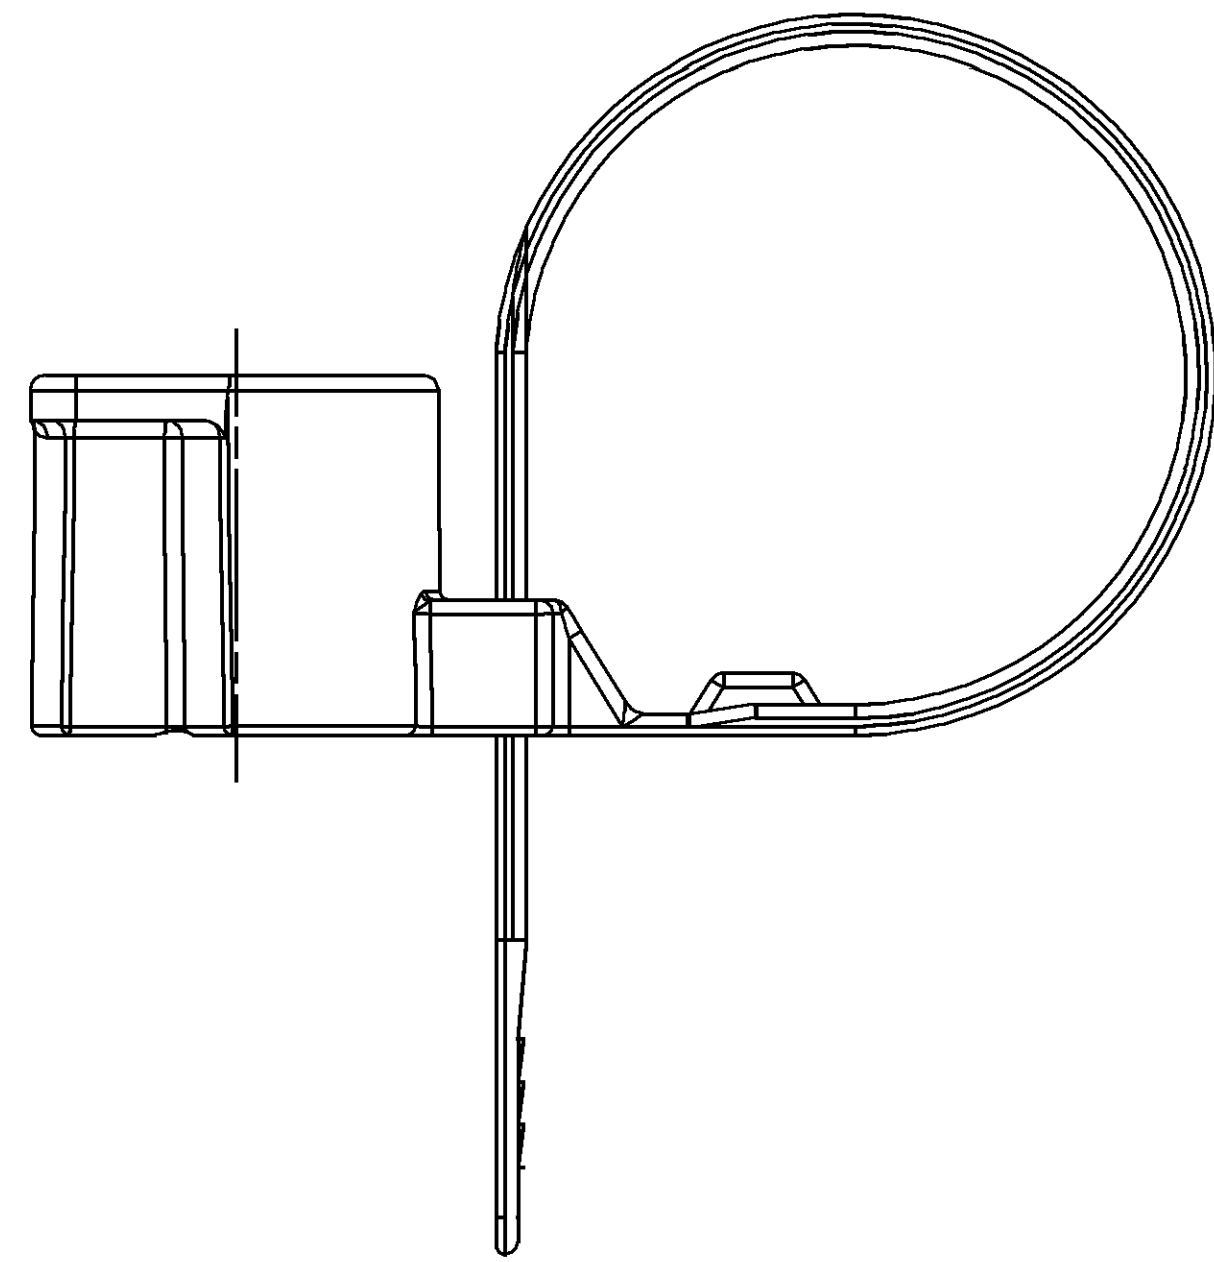


ASSEMBLY VIEW
SCALE 2:1

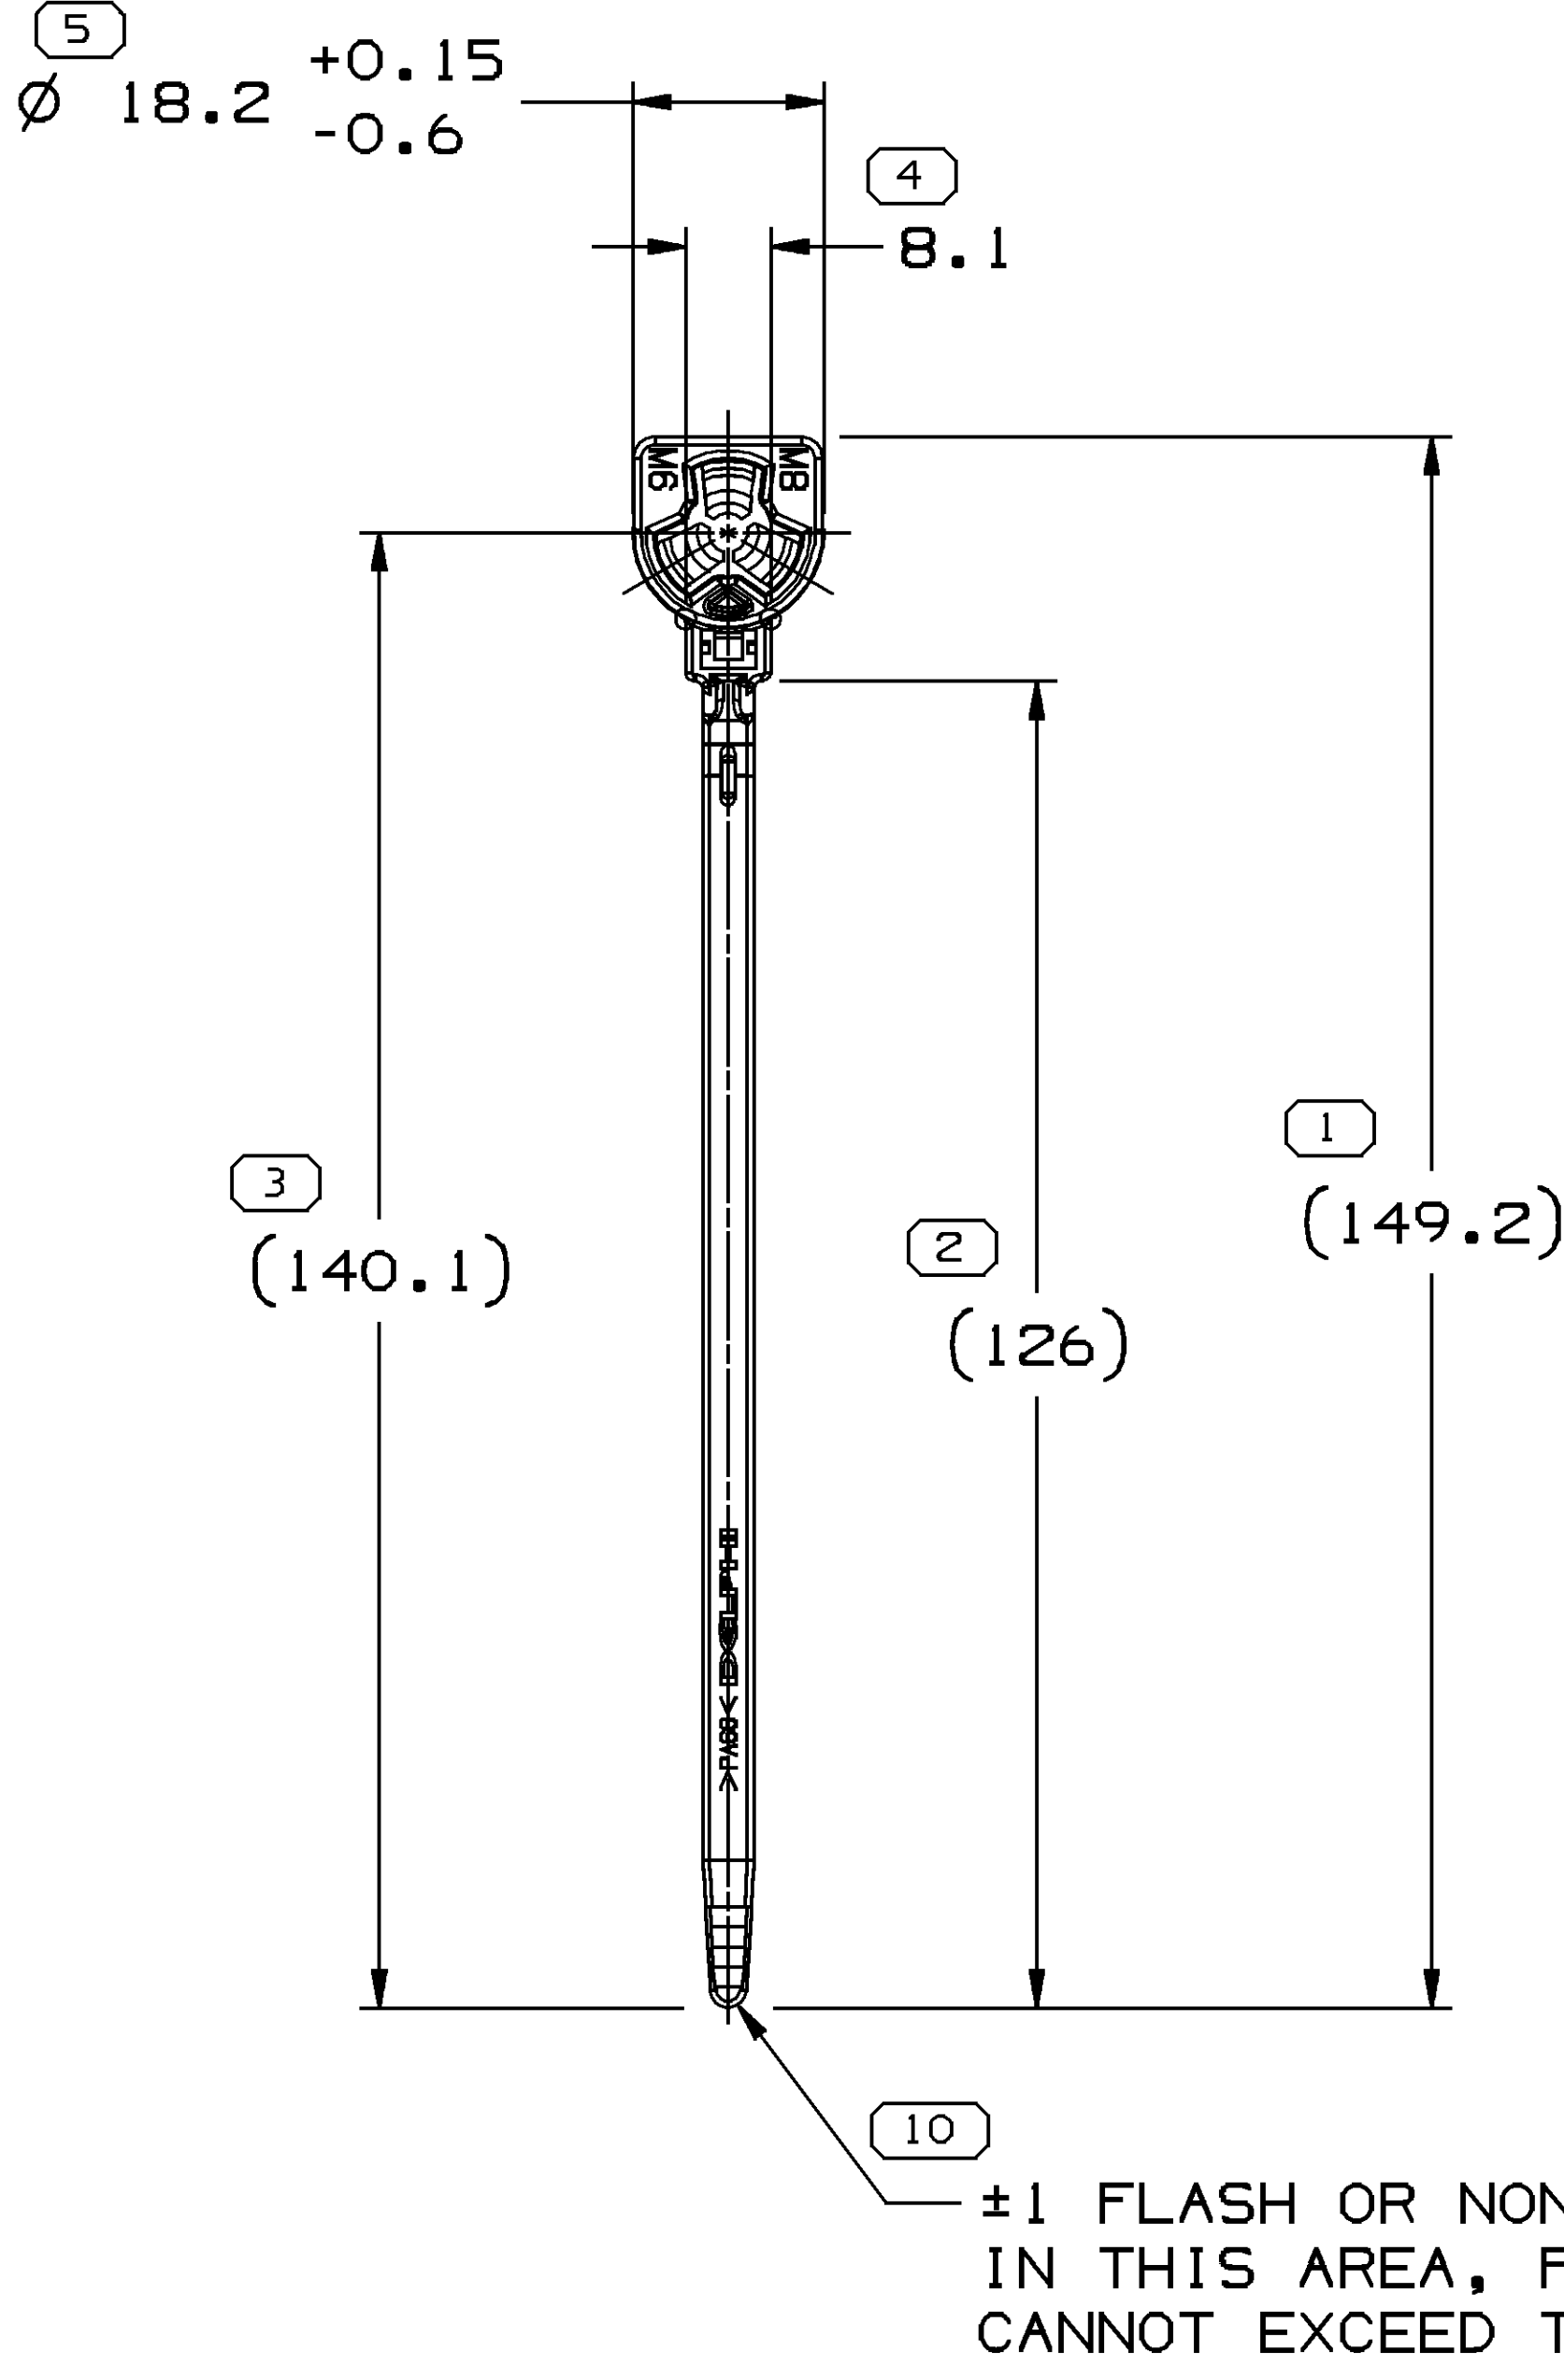


±1 FLASH OR NON-FILL ALLOWED
IN THIS AREA, FLASH ON EACH SIDE
CANNOT EXCEED THE 4.8 STRAP WIDTH




TYPE 101

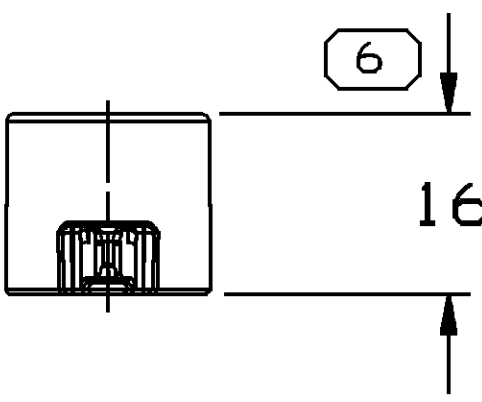

(8) 1.35 ±0.05

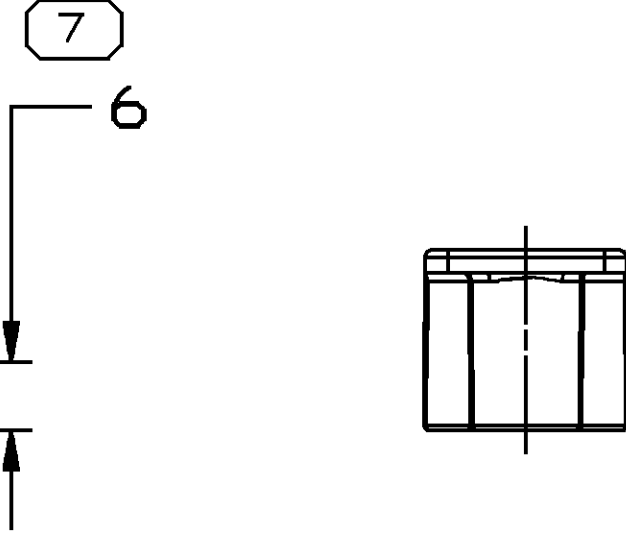

(7) 6

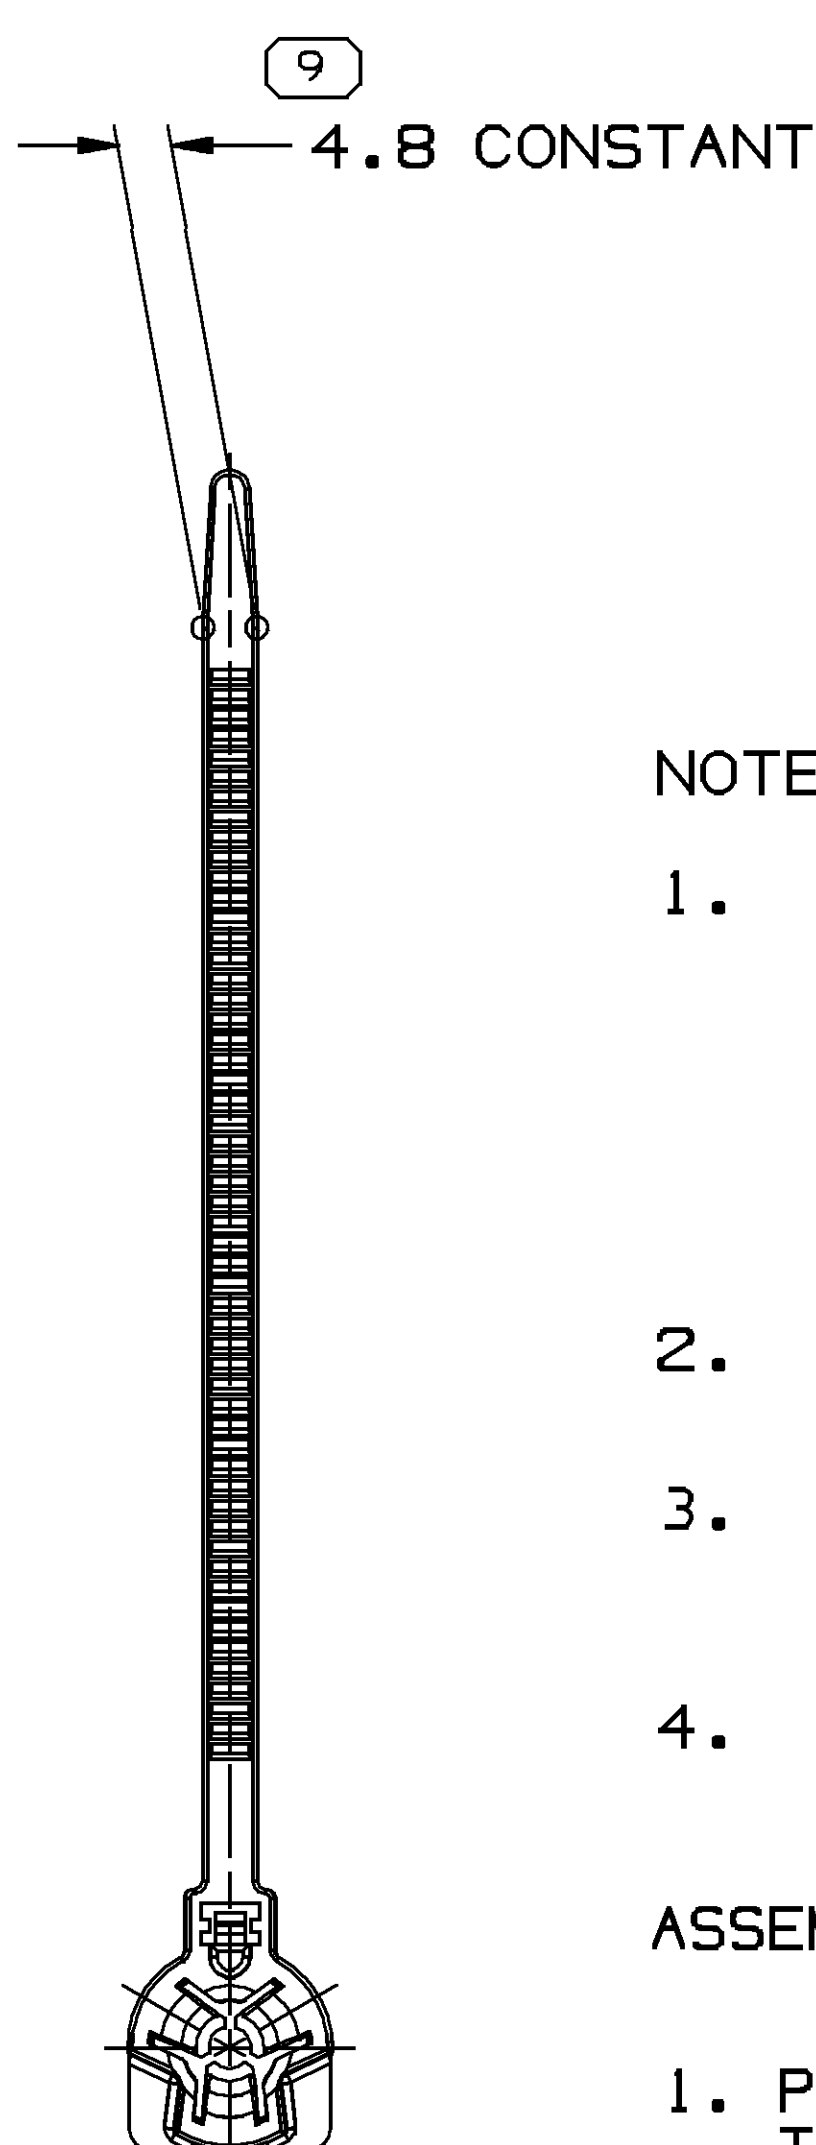

(9) 4.8 CONSTANT

NOTES

- UNLESS OTHERWISE SPECIFIED AND/OR INDICATED:


DIMENSIONS ARE TO FACE OF VIEW SHOWN AND AUTOMATICALLY ROUNDED BY COMPUTER FOR INSPECTION (SEE MATH MODEL FOR PRECISE DIMENSIONS). FOR ALL OTHER DIMENSIONS NOT SHOWN BUT REQUIRED FOR TOOL BUILD, SEE MATH MODEL FOR PRECISE TOOL PATH DATA.
- MATERIAL RECYCLING CODE PER ISO 11469. (1.5)X(0.1) CHARACTERS AS SHOWN TO BE LOCATED ON ANY EXTERIOR SURFACE.
- (1.5)X(0.1) DELPHI CORPORATE BRAND TO BE LOCATED ON ANY EXTERIOR SURFACE, PREFERABLY VISIBLE AT FINAL ASSEMBLY. OPTIONAL CONSTRUCTION FOR EXISTING TOOLING MAY BE "PED".
- THIS CABLE TIE IS DESIGNED TO BE USED WITH AN M6 OR M8 STUD.

ASSEMBLY PROCESSING NOTES:

- PART CAN BE USED WITH HARNESS DIAMETER UP TO A MAX OF 28MM TAPED OR 22MM CONDUIT AND A MIN DIA OF APPROXIMATELY 4MM.
- APPLY TO HARNESS WITH PANDUIT GUN GS2B (MANUAL). GUN TO BE SET AT "STD" AND A TENSION OF 6-8 OR EQUIVALENT.

13576952	01	-	102	-	M3592001 PA66 IM HS BLK	2.732
15491363	04	AC	101	-	M3592018 PA66 IM HS GRA DK	2.732
PART NO	REV	N/P	TYPE	STATUS	MATERIAL SPECIFICATION AND COLOR	VOLUME CM³

DIMENSIONAL RANGE (MM)										CHART	ET
FROM	> 0	> 20	> 30	> 70	> 100	> 150	> 200	> 250	> 300		
TO	20	30	70	100	150	200	250	300	400		
TOLERANCE UNLESS OTHERWISE SPECIFIED											
±0.15 ±0.2 ±0.3 ±0.4 ±0.5 ±0.6 ±0.8 ±1 ±1.2											
ANGULAR TOLERANCE ±2°											

DWG TYPE PART DRAWING	
STYLE	
VOLUME (CM³) SEE CHART	DISTR CODE D
UNLESS OTHERWISE SPECIFIED THIS DOCUMENT IS IN ACCORDANCE WITH ASME Y14.5M-1994 AS AMENDED BY THE 2018 GLOBAL DIMENSIONING AND TOLERANCING ADDENDUM - 1997. ALL GEOMETRIC TOLERANCES AND RELATED DATUMS APPLY RFS. RULE #1 (PERFECT FORM AT MMC) DOES NOT APPLY WHEN RELATIONSHIP BETWEEN FEATURES IS ESTABLISHED BY ORIENTATION OR LOCATION TOLERANCES. SEPARATE POSITION CALLOUTS MAY BE GAGED SEPARATELY, REGARDLESS OF DATUM REFERENCE. ALL DIMENSIONS ARE IN MILLIMETERS	
REFERENCE	
THIRD ANGLE PROJECTION 	DO NOT SCALE USE MATH DATA 

DELPHI DELPHI PACKARD ELECTRIC SYSTEMS WARREN, OH	
DR	DATE
APVD1 C. PAPAS	23FE06
APVD2 C. PAPAS	23FE06
APVD3 GARY C. DETTER	27FE06
APVD4	
APVD5	
SUBSTANCES OF CONCERN AND RECYCLED CONTENT PER DELPHI 10949001	
MATERIAL SEE CHART	
DRAWING NAME TAXI MOUN WIRE TIE CLIP HD PUSH NUT	
DRAWING NUMBER 13576951	
SIZE A1	SCALE 1:1
FRAME NO 1 OF 1	SHEET NO 1 OF 1
STG R	REV 01
N/P -	