


GSD

M55339/17-00274

REVISIONS

ISSUE	CHANGES
8	CN 35618 D KH 01/09/95
9	CN 38302 E REDRAWN TML 05/10/01

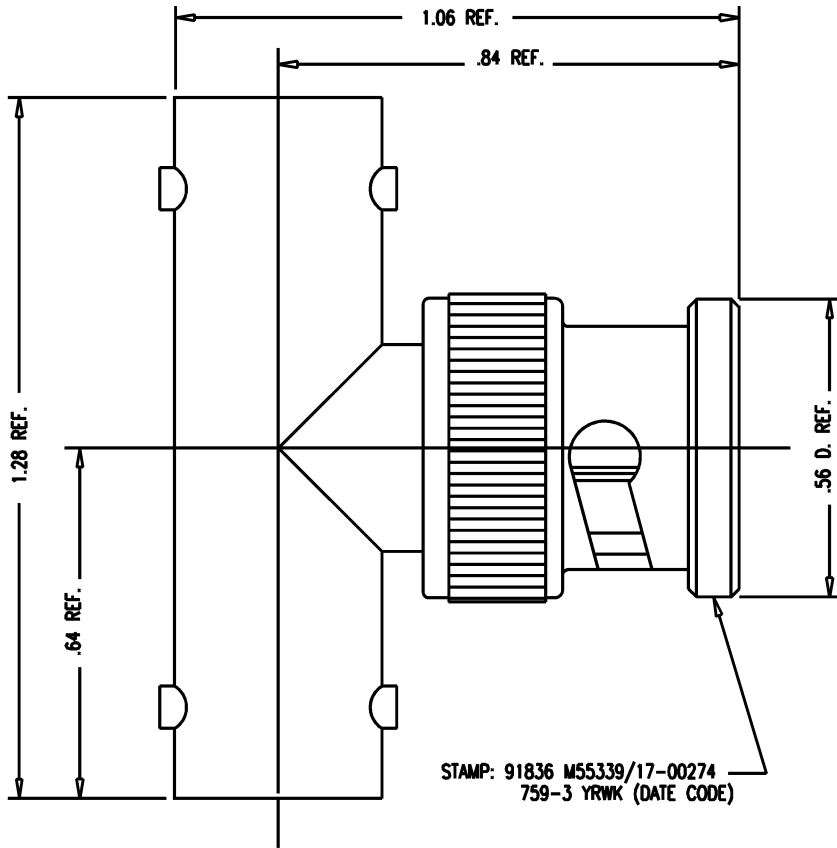

NOTES:

- MATERIALS:**
 INSULATORS: TEFLON, ASTM-D-1457
 GASKET: SIL. RUB., QQ-R-765
 OUTER CONTACT: PHOS. BRONZE, QQ-B-750
 SPRING WASHER } BER. COP., ASTM-D-196
 CONTACT F }
 ALL OTHER PARTS: BRASS, ASTM-B16
- FINISHES:**
 CENTER CONTACTS: HARD GOLD PLATE PER MIL-G-45204
 SPRING WASHER } SILVER PLATE PER QQ-S-365
 CAM LEVER }
 ALL OTHER METAL PARTS: SILVER PLATE PER QQ-S-365
- ELECTRICAL CHARACTERISTICS:**
 NOMINAL IMPEDANCE: 50 OHMS
 VOLTAGE RATING: 500 VRMS
 FREQUENCY RANGE: DC TO 4 GHz

759-3S

SCALE	4:1	
APPROX SURFACE AREA	759-3	
USED ON		
REF:		
ADPT, F-M-F, TEE, BNC		
DRAWN	JHP	DATE 07/23/76
DESIGN		DATE
APPR.	J.M.	DATE 08/20/76

KINGS
ELECTRONICS CO., INC.
ROCK HILL, SOUTH CAROLINA 29730

M55339/17-00274

GSD