PART NO.	ENG. NO.
02-09-1111	7238-(P901)
02-09-1112	7238-(P901)L





SECT. "A-A"



SECT. "B-B"

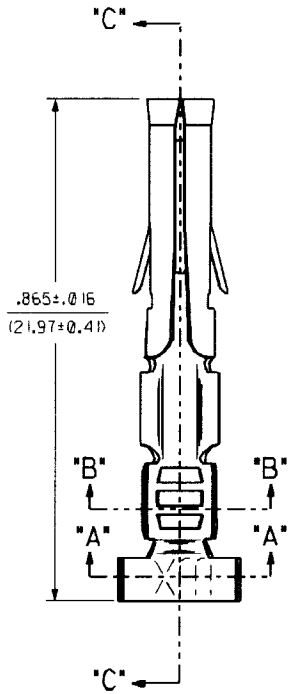

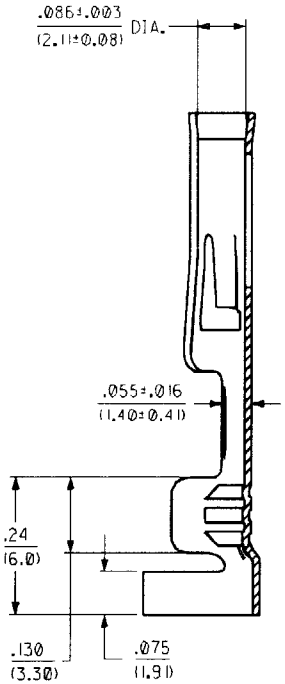

SECT. "C-C"

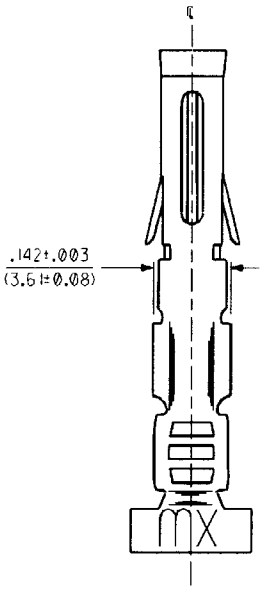

LEGEND

7238-(****)*

- FORM: BLANK=CHAIN, L=LOOSE
- FINISH CODE
- P=PREPLATE, BLANK=POSTPLATE

NOTES:

1. TERMINAL FOR USE WITH .093/(2.36) SERIES HOUSINGS AND WILL ACCEPT 14 THRU 18 AWG WIRE, .160/(4.06) MAX. INSULATION DIA.
2. THIS PART CONFORMS TO PROD. SPEC. 02-09.

FINISH CODES:

901 HOT TIN DIP .000020/(0.00051) MIN.

MATERIAL:

CARTRIDGE BRASS, ALLOY #C26000, .013/(0.33) THICK, SPRING TEMPER.

CHAIN FORM
FULL SCALE



LTR.	REVISIONS
G	REVISE PER ECR U3 0507 GWC 4/1/93 RW
F	REVISE PER ECR U2 0081 GWC 3/5/92 RW
E	REVISE NOTE 2 PER ECR U0 0975 GWC 12/3/90 RW
D	REV. & REDRAWN ECR # U90985 KBW 08-22-89 RW

MFG. | SH. | REV | LTR. | REVISIONS

REVISE ONLY ON CAD SYSTEM

DIMENSIONS SHOWN (METRIC) INCH

UNLESS OTHERWISE SPECIFIED TOLERANCES: ANGULAR ± 1/2°

	INCH	METRIC
3 PLACE	± .010	---
2 PLACE	± .014	± 0.25
1 PLACE	---	± 0.36

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

TITLE: CRIMP TERM., FEMALE .093/(2.36) DIA. FOR 14 THRU 18 AWG. WIRE

MOLEX INCORPORATED, LISLE, ILL. 60532 U.S.A.

SHEET NO. 1 OF 1 | DATE 08/22/89

PART NO. SEE CHART | DRWG. NO. SD-7238-*

DRWN BY KBW | CHK'D BY RW | APPR'D BY GWF | SCALE 6 : 1

FILE NAME SD7238X1.DGN

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

DIV. CP | SIZE C