


PC board drilling dimensions (after plating)
(thickness < 3.20 ± 0.30 mm)

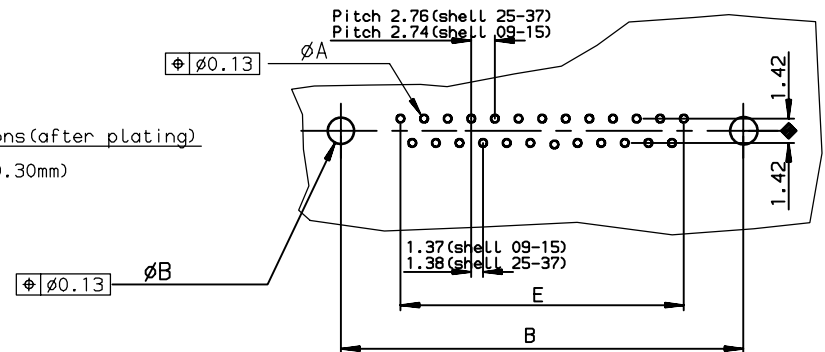

TIN LEAD PART NUMBER

SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	PART NUMBER	PART NUMBER	PART NUMBER
09	30.81	24.99	16.96	16.79	10.96	D09P91C4PL00	D09P91C6PL00	D09P91C8PL00
15	39.14	33.32	25.18	25.12	19.18	D15P91C4PL00	D15P91C6PL00	D15P91C8PL00
25	53.03	47.04	39.12	38.84	33.12	D25P91C4PL00	D25P91C6PL00	D25P91C8PL00
37	69.32	63.50	55.68	55.30	49.68	D37P91C4PL00	D37P91C6PL00	D37P91C8PL00
						gold flash	0.76µ gold	1.25µ gold

LEAD FREE PART NUMBER

SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	PART NUMBER	PART NUMBER	PART NUMBER
09	30.81	24.99	16.96	16.79	10.96	D09P91C4PL00LF	D09P91C6PL00LF	D09P91C8PL00LF
15	39.14	33.32	25.18	25.12	19.18	D15P91C4PL00LF	D15P91C6PL00LF	D15P91C8PL00LF
25	53.03	47.04	39.12	38.84	33.12	D25P91C4PL00LF	D25P91C6PL00LF	D25P91C8PL00LF
37	69.32	63.50	55.68	55.30	49.68	D37P91C4PL00LF	D37P91C6PL00LF	D37P91C8PL00LF
						gold flash	0.76µ gold	1.25µ gold

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:

SEE DRAWING C01-8646-0001

European Views

www.fciconnect.com		surface ISO 1302 ✓	tolerance std ISO 406 ISO 1101	projection mm
TOLERANCES UNLESS OTHERWISE SPECIFIED				
Dr	JARRY	1992/09/14	0.X ±0.1	size A3
Eng	PESSON	1992/09/14	0.XX ±0.1	Scale 2
Chr	LEGARE	1992/09/14	0.XX' ±2'	ECN LS06-0140
Appr	LEGARE	1992/09/14	0.XXX ±0.1	Spec ref -
Product family			D-SUB	
		MALE CONNECTOR DELTA D STD EUROPE straight press-fit		title C01-8646-0110
catalog no		-		CUSTOMER sheet 1 of 1

rev	ecn no	dr	date
G	-	JOU	1999/12/03
H	LS05-004	MPE	2005/02/07
J	LS06-0097	LGO	2006/07/29
K	LS06-0140	LGO	2006/09/22
-	-	-	-
-	-	-	-
-	-	-	-

Copyright FCI. FCI