

INTERNATIONAL TERMINAL TYPE POWER TRANSFORMERS




E58127
E78675
E154515



CERTIFIED
LR52082

**CLASS A, B AND F
INSULATION SYSTEMS
FILE NO. E154515
FOR CLASS B AND F**

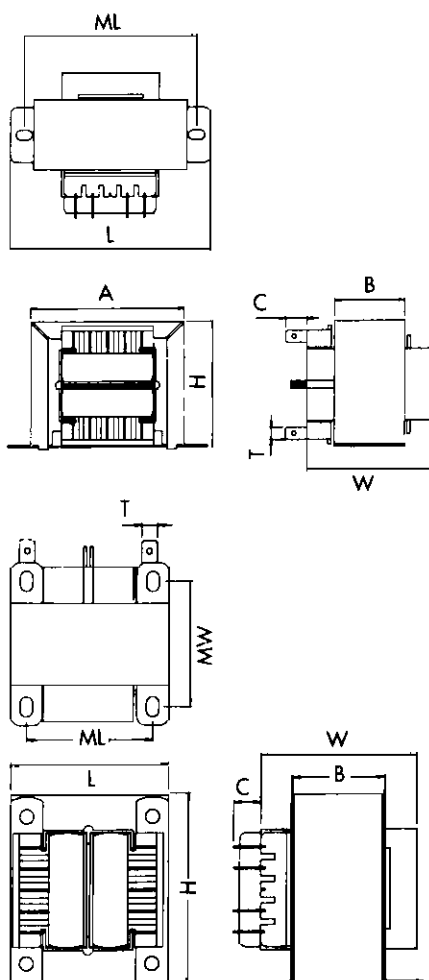

PART NO. PC MOUNT	VA (SIZE)	SECONDARY RATING	
		SERIES	PARALLEL
LT-10-25	25	10.0V C.T. @ 2.50A	5.0V @ 5.00A
LT-10-43	43	10.0V C.T. @ 4.30A	5.0V @ 8.60A
LT-10-80	80	10.0V C.T. @ 8.00A	5.0V @ 16.00A
LT-10-130	130	10.0V C.T. @ 13.00A	5.0V @ 26.00A
LT-10-175	175	10.0V C.T. @ 17.50A	5.0V @ 35.00A
LT-10-25	25	12.6V C.T. @ 2.00A	6.3V @ 4.00A
LT-10-43	43	12.6V C.T. @ 3.40A	6.3V @ 6.80A
LT-10-80	80	12.6V C.T. @ 6.30A	6.3V @ 12.60A
LT-10-130	130	12.6V C.T. @ 10.30A	6.3V @ 20.60A
LT-10-175	175	12.6V C.T. @ 14.00A	6.3V @ 28.00A
LT-10-25	25	16.0V C.T. @ 1.60A	8.0V @ 3.20A
LT-10-43	43	16.0V C.T. @ 2.70A	8.0V @ 5.40A
LT-10-80	80	16.0V C.T. @ 5.00A	8.0V @ 10.00A
LT-10-130	130	16.0V C.T. @ 8.10A	8.0V @ 16.20A
LT-10-175	175	16.0V C.T. @ 11.00A	8.0V @ 22.00A
LT-10-25	25	20.0V C.T. @ 1.25A	10.0V @ 2.50A
LT-10-43	43	20.0V C.T. @ 2.20A	10.0V @ 4.40A
LT-10-80	80	20.0V C.T. @ 4.00A	10.0V @ 8.00A
LT-10-130	130	20.0V C.T. @ 6.50A	10.0V @ 13.00A
LT-10-175	175	20.0V C.T. @ 8.80A	10.0V @ 17.60A
LT-10-25	25	24.0V C.T. @ 1.00A	12.0V @ 2.00A
LT-10-43	43	24.0V C.T. @ 1.80A	12.0V @ 3.60A
LT-10-80	80	24.0V C.T. @ 3.30A	12.0V @ 6.60A
LT-10-130	130	24.0V C.T. @ 5.40A	12.0V @ 10.80A
LT-10-175	175	24.0V C.T. @ 7.30A	12.0V @ 14.60A
LT-10-25	25	28.0V C.T. @ 0.90A	14.0V @ 1.80A
LT-10-43	43	28.0V C.T. @ 1.50A	14.0V @ 3.00A
LT-10-80	80	28.0V C.T. @ 2.80A	14.0V @ 5.60A
LT-10-130	130	28.0V C.T. @ 4.60A	14.0V @ 9.20A
LT-10-175	175	28.0V C.T. @ 6.25A	14.0V @ 12.50A
LT-10-25	25	36.0V C.T. @ 0.70A	18.0V @ 1.40A
LT-10-43	43	36.0V C.T. @ 1.20A	18.0V @ 2.40A
LT-10-80	80	36.0V C.T. @ 2.20A	18.0V @ 4.40A
LT-10-130	130	36.0V C.T. @ 3.60A	18.0V @ 7.20A
LT-10-175	175	36.0V C.T. @ 4.80A	18.0V @ 9.60A
LT-10-25	25	230.0V C.T. @ 0.11A	115.0V @ 0.22A
LT-10-43	43	230.0V C.T. @ 0.19A	115.0V @ 0.38A
LT-10-80	80	230.0V C.T. @ 0.35A	115.0V @ 0.70A
LT-10-130	130	230.0V C.T. @ 0.57A	115.0V @ 1.14A
LT-10-175	175	230.0V C.T. @ 0.76A	115.0V @ 1.52A

MECHANICAL DIMENSIONS

VA	WT	L	W	H	A	B	C	T	ML	MW
25	1.250	2.182	1.875	2.312	2.000	1.125	0.312	0.187	2.375	-
43	1.600	3.125	2.062	2.687	2.250	1.125	0.312	0.187	2.812	-
80	2.800	2.500	2.375	3.000	-	1.375	0.312	0.187	2.000	2.18
130	4.100	2.182	2.875	3.375	-	1.625	0.375	0.250	2.250	2.50
175	5.200	3.125	2.875	3.750	-	1.625	0.375	0.250	2.500	2.50