


| DATE   | SYM | REVISION RECORD | AUTH. | DR. | CK. |
|--------|-----|-----------------|-------|-----|-----|
| 8/8/00 | -   | ISSUED          |       | NT  | DG  |
|        |     |                 |       |     |     |
|        |     |                 |       |     |     |
|        |     |                 |       |     |     |
|        |     |                 |       |     |     |

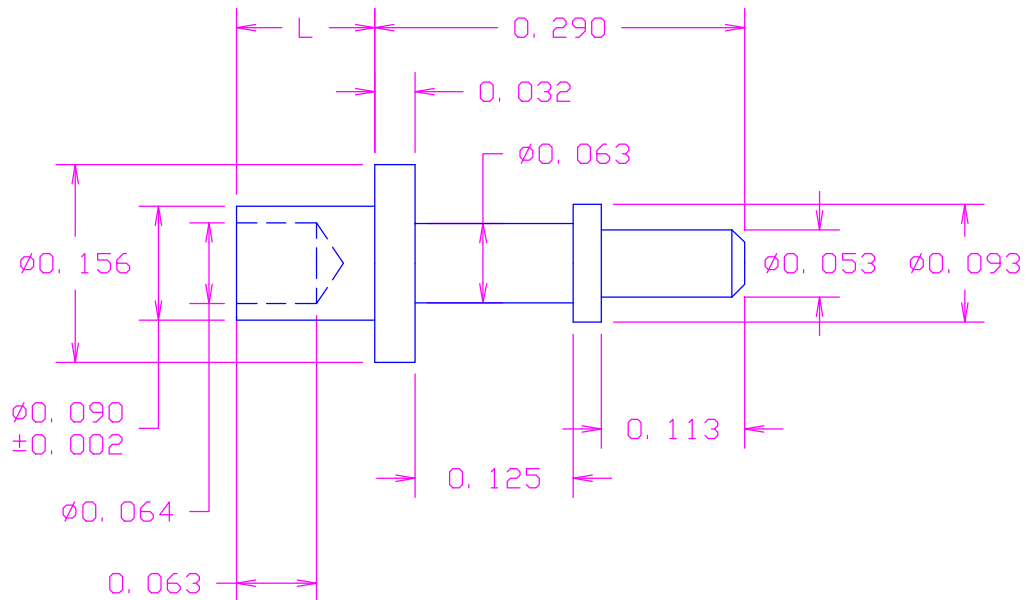

RECOMMENDED MOUNTING HOLE .094 DIA.(#42 DRILL)

MATERIAL: BRASS PER ASTM B16,

ALLOY 36000, 1/2 HARD


FINISH: .0003"MIN. SILVER PER QQ-S-365,

TYPE II, WITH NON-CHROMATE

PRESERVATIVE

|              |      |
|--------------|------|
| PART NUMBER: | L:   |
| 10-805-1-01  | .078 |
| 10-805-2-01  | .109 |
| 10-805-3-01  | .141 |
| 10-805-4-01  | .172 |
| 10-805-6-01  | .234 |
| 10-805-8-01  | .297 |

ACTUAL SIZE



|                                 |                   |                               |                                            |
|---------------------------------|-------------------|-------------------------------|--------------------------------------------|
| TOLERANCES<br>(EXCEPT AS NOTED) | CONCORD           |                               | ELECTRONICS<br>CORPORATION                 |
| DECIMAL<br>± .005               | P/N               | SCALE                         | 30 GREAT JONES ST.<br>NEW YORK N. Y. 10012 |
| FRACTIONAL<br>± 1/64            | TITLE<br>TERMINAL |                               |                                            |
| ANGULAR<br>± 5°                 | DATE<br>8/8/00    | DRAWING NUMBER<br>10-805-X-01 |                                            |