
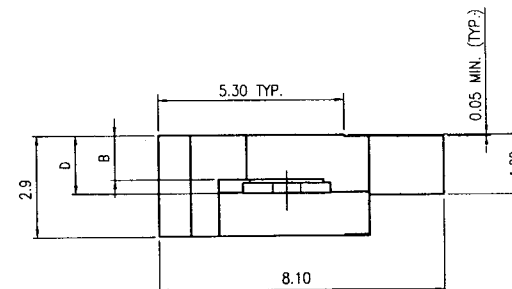
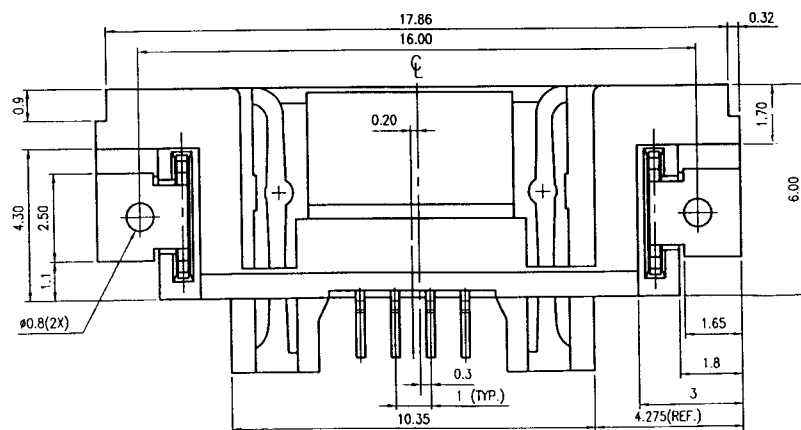
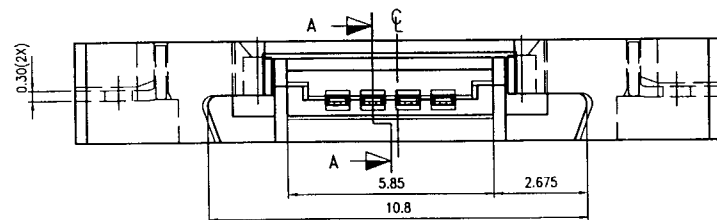


Tous droits strictement réservés. Reproduction ou communication, en tout ou en partie, sans autorisation écrite du propriétaire.
 sous quelque forme que ce soit, sans autorisation écrite du propriétaire.
 propriété de BERG ELECTRONICS.
 Droits de reproduction BERG ELECTRONICS by

BERG
ELECTRONICS

All rights strictly reserved. Reproduction or issue to third parties in any form or by any means, without written authority from the proprietor.
 Reproduction or issue to third parties in any form or by any means, without written authority from the proprietor.
 Copyright BERG ELECTRONICS by

PRODUCT NO.
SEE TABLE 1

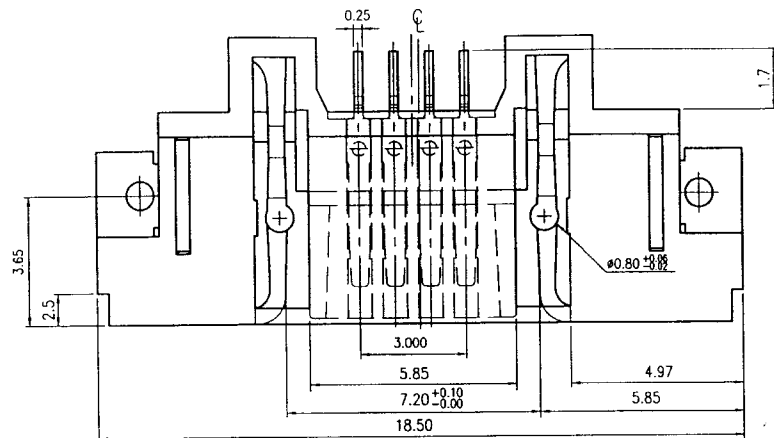


mat'l code				tolerance unless otherwise specified		CUSTOMER COPY		BERG ELECTRONICS	
rev.	ecn no.	dr	date	linear	.0 ± 0.10 .00 ± 0.08 .000 ± 0.05	projection	title	product family	code
A	T80573	M	W12/15/98	angles	± 2°		PCMCIA 4 POS. UNSHIELDED I/O CARD CONN.		
				dr	C L CHEN 08/19/98	unit			
				enqr	C L CHEN 08/19/98	mm/inch			
				chr	C L CHEN 08/19/98	scale			
				oppd	C L CHEN 08/19/98	6 : 1			
sheet	revision	A	A						
index	sheet	1	2						

Tous droits strictement réservés. Reproduction ou communication à des tiers sans la permission écrite de BERG ELECTRONICS. Droits de reproduction BERG ELECTRONICS.


BERG
ELECTRONICS

All rights strictly reserved. Reproduction or issue to third parties in any form without the written authority of BERG ELECTRONICS. Copyright BERG ELECTRONICS.

PRODUCT NO.
SEE TABLE 1

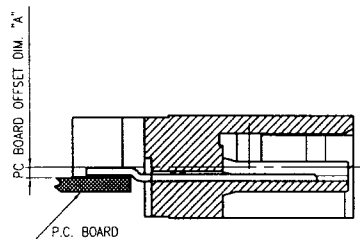

SEC. A-A

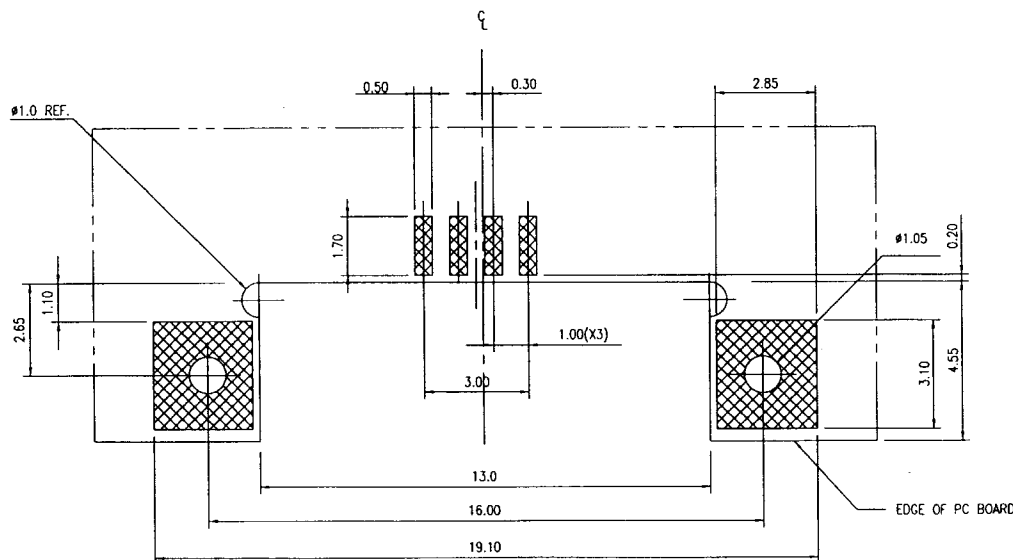

RECOMMENDED P.C. BOARD LAYOUT

NOTE :

1. MATERIAL :
INSULATOR..... P.P.S. 40% GLASS REINFORCED, UL 94V-0 RATED. BLACK.
CONTACT..... PHOSPHOR BRONZE, C5191R-H, 0.2 MM THICK.
METAL HOLD-DOWN..... BRASS, C2680-EH
2. FINISH :
CONTACT : ALL OVER ----- Ni UNDER PLATING 1.27µm THK.
CONTACT AREA ----- GOLD FLASH OVER Pd-Ni 1.02 µm THK.
SOLDER TAIL ---- TIN LEAD 2.5µm THK.
HOLD-DOWN : TIN LEAD 2.5 µm OVER NICKEL UNDERPLATING.

TABLE 1

PRODUCT NO.	DIM.	A	B	C	D	PACKAGING	NOTE
74634-001		0.3	1.350	1.80	1.675	500/TRAYS	
74634-002		0.6	1.575	2.025	1.975	500/TRAYS	N/A
74634-001S		0.3	1.275	1.725	1.675	200/TRAYS	
74634-002S		0.6	1.575	2.025	1.975	200/TRAYS	N/A
74634-001T		0.3	1.275	1.725	1.675	1000/T&R	
74634-002T		0.6	1.575	2.025	1.975	1000/T&R	N/A

mat'l code				tolerance unless otherwise specified		CUSTOMER COPY		BERG ELECTRONICS	
rev.	ecn no.	dr	date	linear	angles	projection	title	product family	code
A				.0 ± 0.10 .00 ± 0.08 .000 ± 0.05	± 2°		PCMCIA 4 POS. UNSHIELDED I/O CARD CONN.	size dwg no.	sheet
				dr C L CHEN 08/19/98	unit mm/inch			74634	2 OF 2
				enr C L CHEN 08/19/98	scale				
				chr C L CHEN 08/19/98	6 : 1				
				appd C L CHEN 08/19/98					
sheet index	revision sheet								