

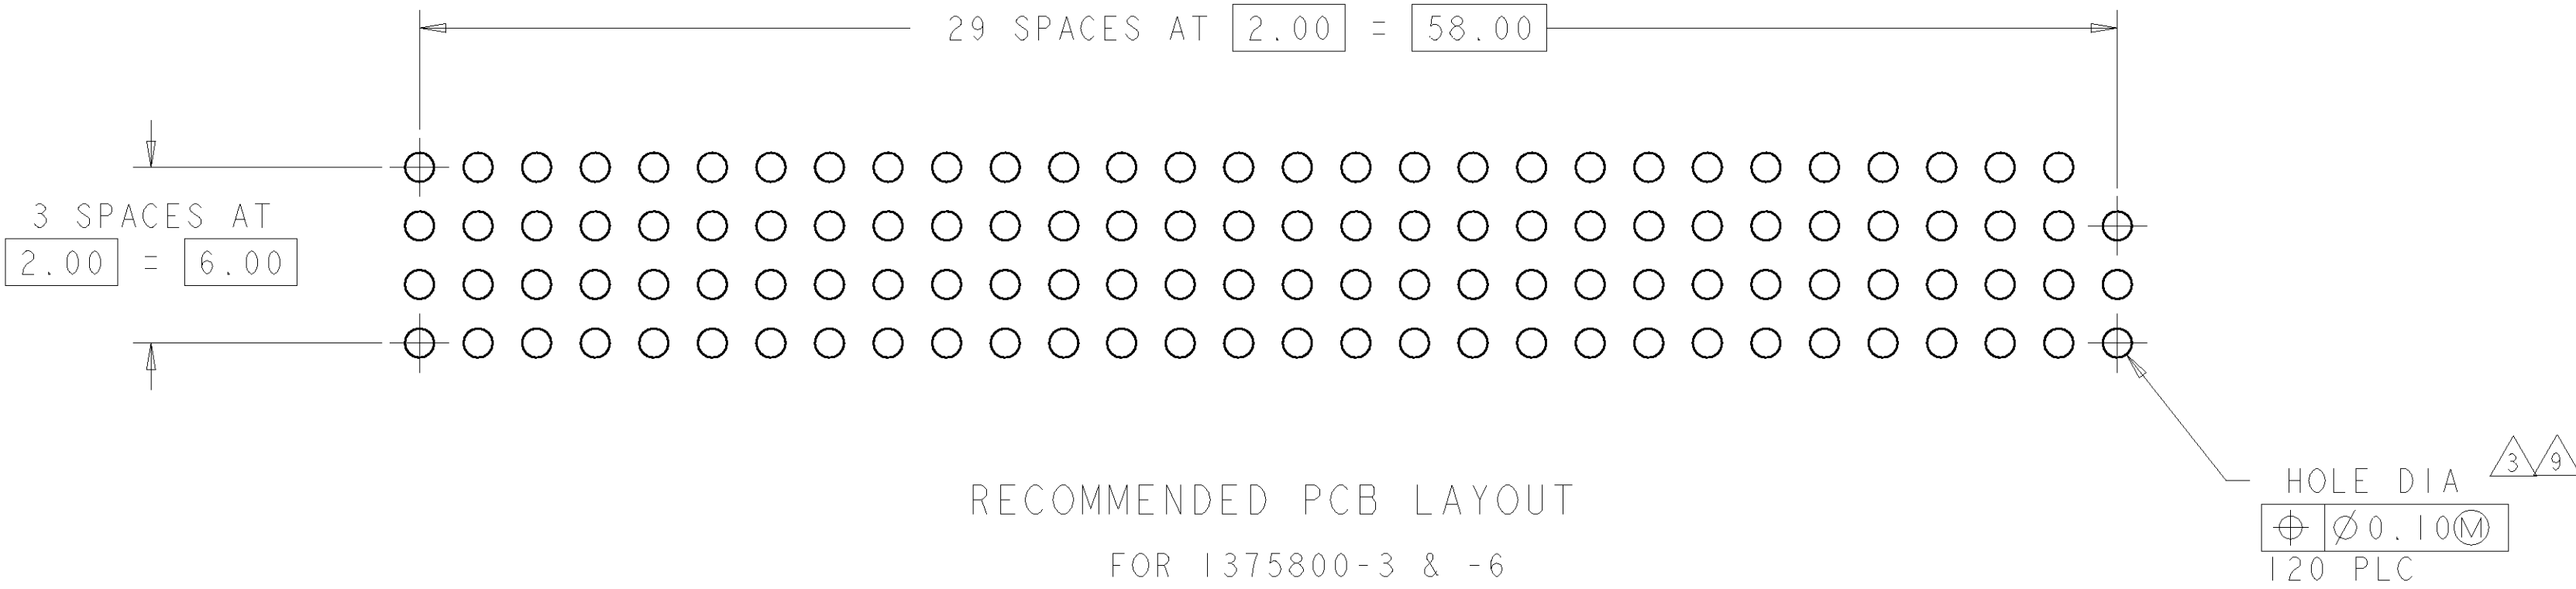
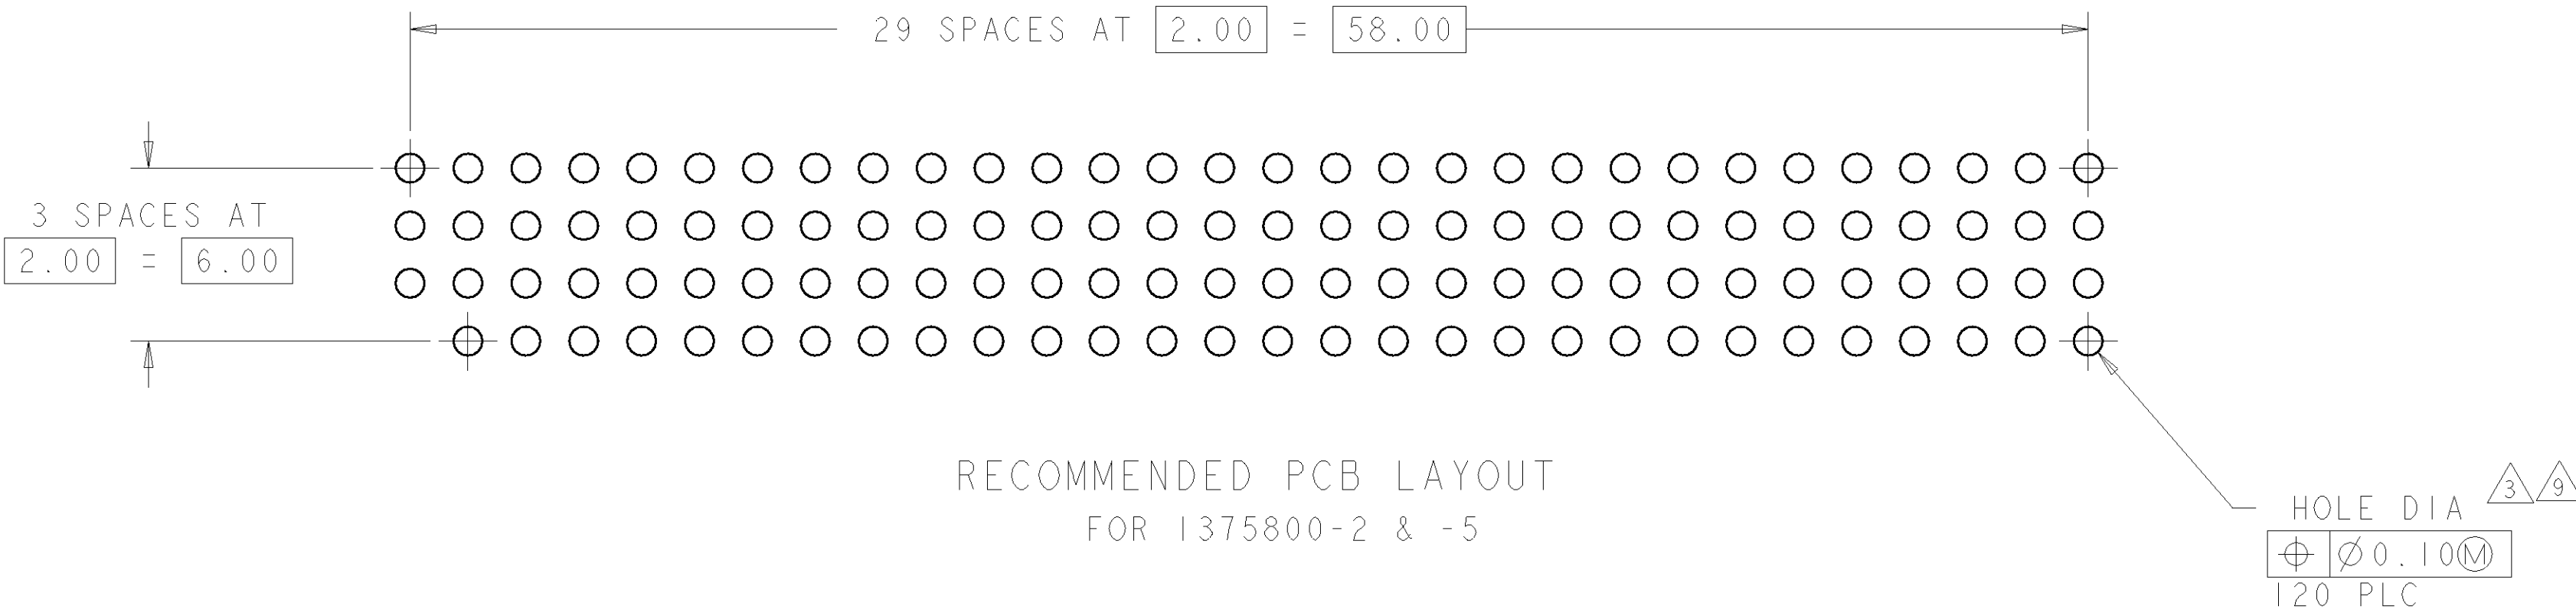


LOC		DIST		REVISIONS			
AD	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-


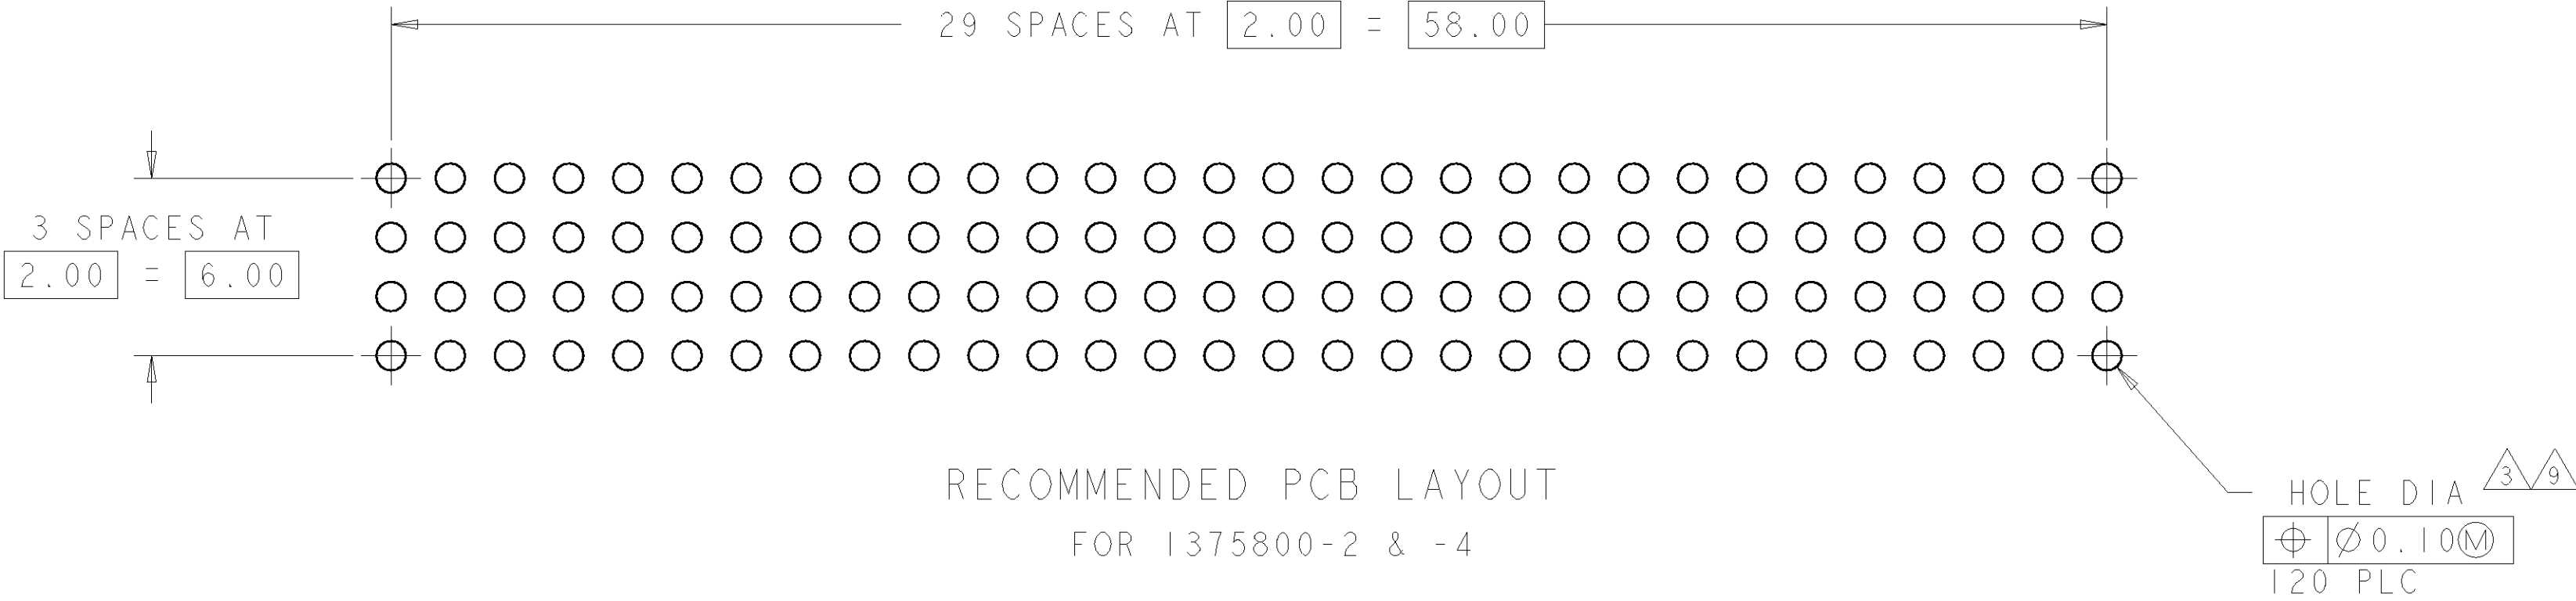


THIS DRAWING IS UNPUBLISHED. IT IS THE PROPERTY OF TYCO ELECTRONICS CORPORATION. IT IS TO BE USED FOR THE PURPOSES SPECIFIED IN THE ORDER. IT IS NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT PERMISSION IN WRITING FROM TYCO ELECTRONICS CORPORATION. SHOULD BE CONTACTED FOR THE LATEST EDITION.		DWN 20JUN2000 W.G. LENKER		AMP Tyco Electronics Harrisburg, PA 17105-3608	
		CHK 15JAN2001 L. BREKOSKY			
		APVD 13JUN2001 J. OLSON			
		NAME			
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC	
mm		0 PLC ± 1 PLC ± 2 PLC ±0.13 3 PLC ± 4 PLC ± ANGLES ± FINISH		APPLICATION SPEC	
MATERIAL		WEIGHT		SIZE CAGE CODE DRAWING NO	
-		-		A 00779 C=1375800	
		CUSTOMER DRAWING		RESTRICTED TO	
				SCALE 99:20 SHEET 2 OF 2 REV E	

LOC		DIST		REVISIONS				
AD	00	P	LTR	DESCRIPTION		DATE	DWN	APVD
		E		0G3C-0184-05		31AUG2005	RB	JO

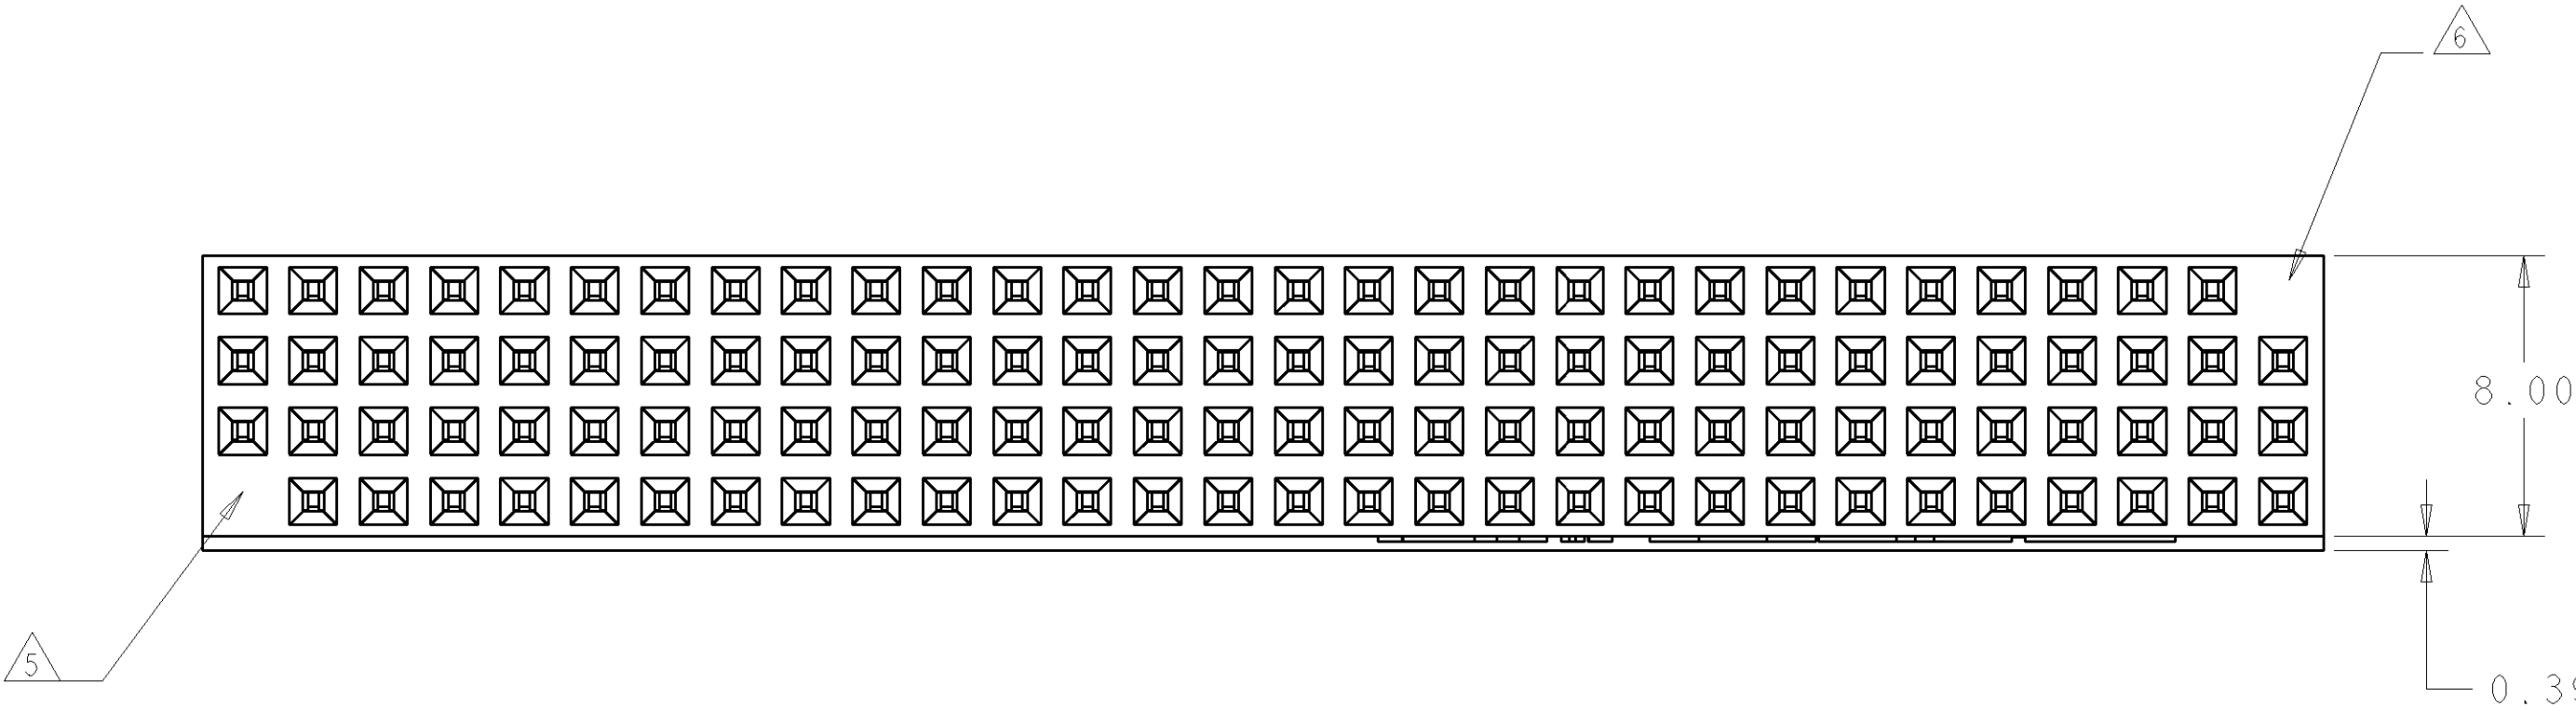

- △ HOUSING: HIGH TEMPERATURE, GLASS FILLED NYLON, COLOR: BLACK.
CONTACTS: PHOSPHOR BRONZE.
- △ CONTACTS: 0.000381 MIN GOLD ON MATING RECEPTACLE END, 0.00254 BRIGHT TIN-LEAD ON REMAINDER, ALL OVER 0.001270 NICKEL.
- △ PCB HOLE RECOMMENDATIONS:
A. DRILL HOLE DIAMETER TO BE 1.00±0.02.
B. PLATING TO BE 0.005 MIN TIN-LEAD OVER 0.025-0.075 COPPER.
C. RECOMMENDED FINISH HOLE SIZE IS 0.88±0.08.
- △ DIMENSION AFTER SEATING TO PCB.
- △ NO CONTACT IN THIS POSITION FOR 1375800-2 & -5 ONLY.
- △ NO CONTACT IN THIS POSITION FOR 1375800-3 & -6 ONLY.
- △ CONTACTS: 0.000381 MIN GOLD ON MATING RECEPTACLE END, 0.00254-0.00508 MATTE TIN ON REMAINDER, ALL OVER 0.001270 NICKEL.
- △ ROHS 2002/95/EC COMPLIANT PART TO BE USED WITH ROHS 2002/95/EC COMPLIANT PCB's.
- △ PCB HOLE RECOMMENDATIONS FOR SILVER IMMERSION PLATING:
A. DRILL HOLE DIAMETER TO BE 1.00±0.02.
B. PLATING TO BE 0.000152-0.000406 SILVER OVER 0.025-0.075 COPPER.
C. RECOMMENDED FINISH HOLE SIZE IS 1.05±0.05.

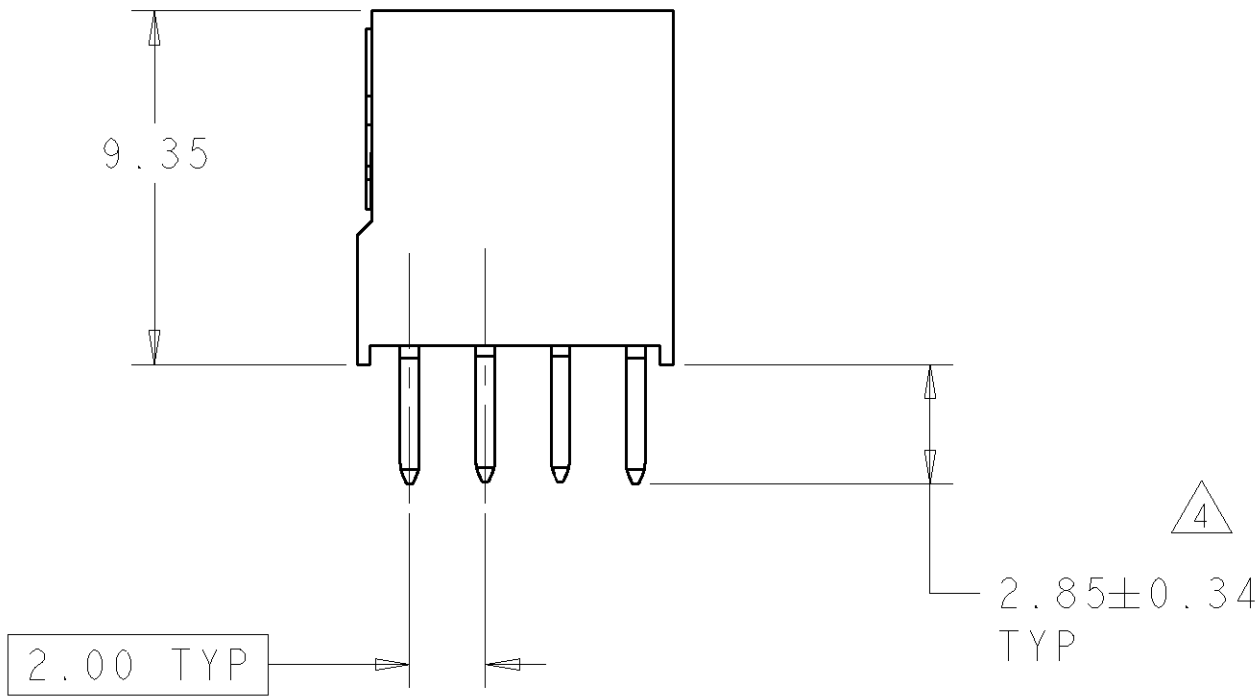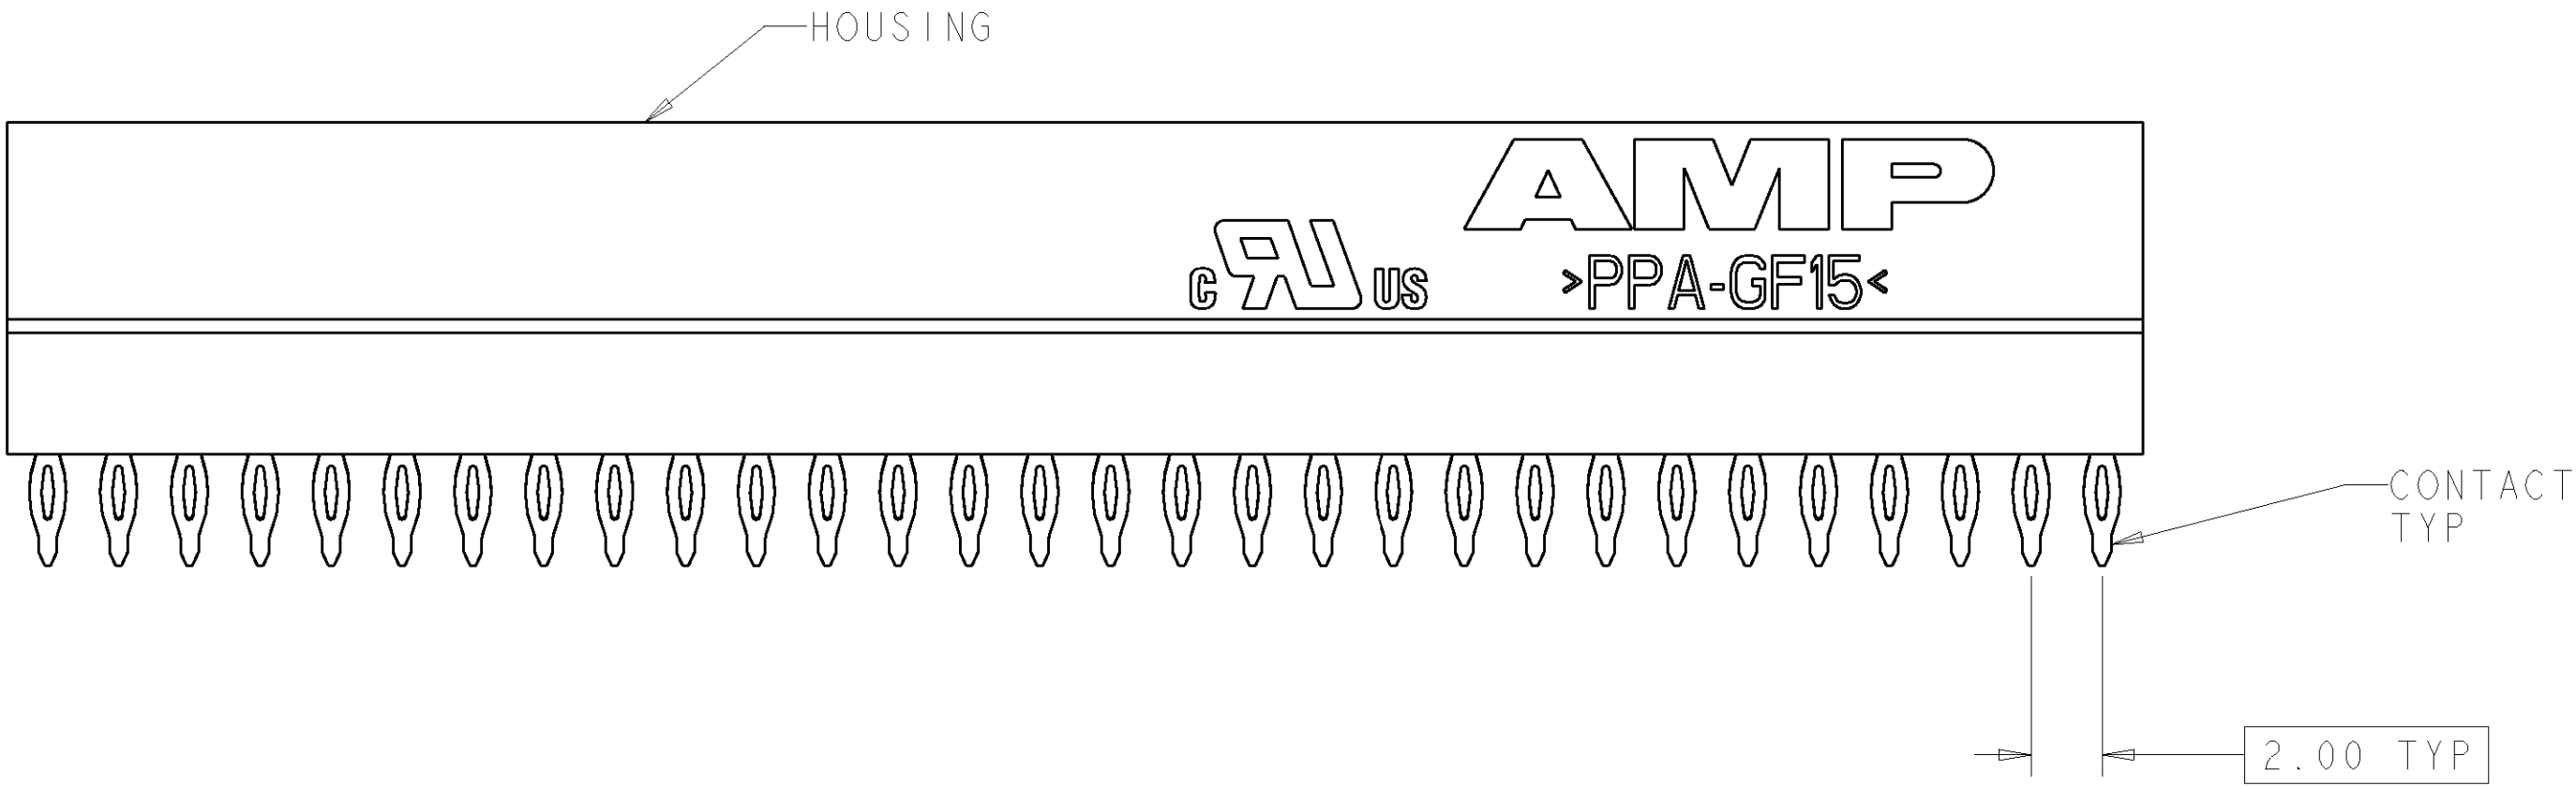

△ 9 / △ 8	△ 7	YES △ 6	1375800-6
△ 9 / △ 8	△ 7	YES △ 5	1375800-5
△ 9 / △ 8	△ 7	NO	1375800-4
△ 2	YES △ 6	1375800-3	
△ 2	YES △ 5	1375800-2	
△ 2	NO	1375800-1	
FINISH		KEYED CIRCUIT	PART NO

DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		DWN W.G. LENKER 20JUN2000	AMP Tyco Electronics Harrisburg, PA 17105-3608	
mm		0 PLC ± 1 PLC ±0.13 2 PLC ± 3 PLC ± 4 PLC ±		CHK L.BREKOSKY 15JAN2001		
		ANGLES ±		APVD J. OLSON 13JUN2001		
MATERIAL		FINISH		NAME ASSEMBLY, PC/104-PLUS, NON-STACKTHROUGH CONTACTS, PRESS FIT		
△		△ 2 / △ 7		PRODUCT SPEC 108-1956	SIZE A	CAGE CODE 00779
				APPLICATION SPEC 114-13021	DRAWING NO C=1375800	RESTRICTED TO -
				WEIGHT -		
				CUSTOMER DRAWING	SCALE 5:1	SHEET 1 OF 2
					REV E	