

TOSHIBA PHOTOCOUPLER GaAs IRED & PHOTO-TRIAC

# TLP160G

TRIAC DRIVE

PROGRAMMABLE CONTROLLERS

AC-OUTPUT MODULE

SOLID STATE RELAY

The TOSHIBA MINI FLAT COUPLER TLP160G is a small outline coupler, suitable for surface mount assembly.

The TLP160G consists of a photo triac, optically coupled to a gallium arsenide infrared emitting diode.

- Peak Off-State Voltage : 400V (MIN.)
- Trigger LED Current : 10mA (MAX.)
- On-State Current : 70mA (MAX.)
- Isolation Voltage : 2500Vrms (MIN.)
- UL Recognized : UL1577, File No. E67349


**TRIGGER LED CURRENT**

CLASSIFICATION*	TRIGGER LED CURRENT (mA)		MARKING OF CLASSIFICATION
	$V_T = 3V, T_a = 25^\circ C$		
	MIN.	MAX.	
(IFT5)	—	5	T5
(IFT7)	—	7	T5, T7
Standard	—	10	T5, T7, Blank

\*Ex. (IFT5) ; TLP160G (IFT5)


(Note) Application type name for certification test, please use standard product type name, i.e. TLP160G (IFT5) : TLP160G

Unit in mm

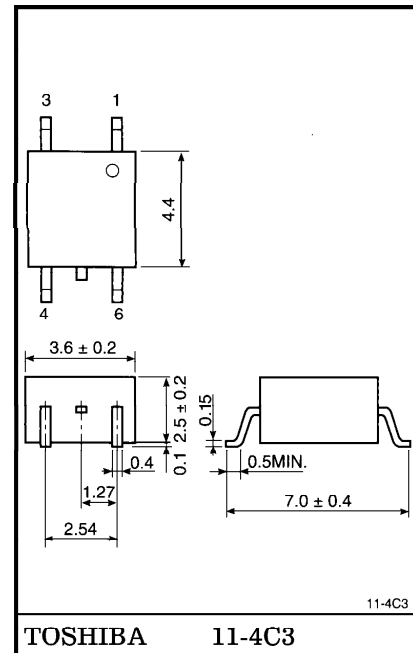

Weight : 0.09g

**PIN CONFIGURATIONS**



1. ANODE
3. CATHODE
4. TERMINAL 1
6. TERMINAL 2

961001EAA2

● TOSHIBA is continually working to improve the quality and the reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to observe standards of safety, and to avoid situations in which a malfunction or failure of a TOSHIBA product could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent products specifications. Also, please keep in mind the precautions and conditions set forth in the TOSHIBA Semiconductor Reliability Handbook.

● The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.

● The information contained herein is subject to change without notice.

MAXIMUM RATINGS (Ta = 25°C)

CHARACTERISTIC		SYMBOL	RATING	UNIT
LED	Forward Current	$I_F$	50	mA
	Forward Current Derating (Ta ≥ 53°C)	$\Delta I_F / ^\circ C$	-0.7	mA / °C
	Peak Forward Current (100µs pulse, 100pps)	$I_{FP}$	1	A
	Reverse Voltage	$V_R$	5	V
	Junction Temperature	$T_j$	125	°C
DETECTOR	Off-State Output Terminal Voltage	$V_{DRM}$	400	V
	On-State RMS Current	Ta = 25°C	70	mA
		Ta = 70°C	40	
	On-State Current Derating (Ta ≥ 25°C)	$\Delta I_T / ^\circ C$	-0.67	mA / °C
	Peak On-State Current (100µs pulse, 120pps)	$I_{TP}$	2	A
	Peak Nonrepetitive Surge Current (PW = 10ms, DC = 10%)	$I_{TSM}$	1.2	A
	Junction Temperature	$T_j$	115	°C
Storage Temperature Range	$T_{stg}$	-55~125	°C	
Operating Temperature Range	$T_{opr}$	-40~100	°C	
Lead Soldering Temperature (10s)	$T_{sol}$	260	°C	
Isolation Voltage (AC, 1 min., R.H. ≤ 60%) (Note)	$BV_S$	2500	Vrms	

(Note) Device considered a two terminal device : Pins 1 and 3 shorted together and pins 4 and 6 shorted together.

RECOMMENDED OPERATING CONDITIONS

CHARACTERISTIC	SYMBOL	MIN.	TYP.	MAX.	UNIT
Supply Voltage	$V_{AC}$	—	—	120	Vac
Forward Current	$I_F$	15	20	25	mA
Peak On-State Current	$I_{TP}$	—	—	1	A
Operating Temperature	$T_{opr}$	-25	—	85	°C

INDIVIDUAL ELECTRICAL CHARACTERISTICS (Ta = 25°C)

CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
LED	Forward Voltage	$V_F$	$I_F = 10\text{mA}$	1.0	1.15	1.3	V
	Reverse Current	$I_R$	$V_R = 5\text{V}$	—	—	10	$\mu\text{A}$
	Capacitance	$C_T$	$V = 0, f = 1\text{MHz}$	—	30	—	pF
DETECTOR	Peak Off-State Current	$I_{DRM}$	$V_{DRM} = 400\text{V}$	—	10	1000	nA
	Peak On-State Voltage	$V_{TM}$	$I_{TM} = 70\text{mA}$	—	1.7	2.8	V
	Holding Current	$I_H$	—	—	0.6	—	mA
	Critical Rate of Rise of Off-State Voltage	$dv/dt$	$V_{in} = 120\text{Vrms}, T_a = 85^\circ\text{C}$ (Fig.1)	200	500	—	$\text{V}/\mu\text{s}$
	Critical Rate of Rise of Commutating Voltage	$dv/dt(c)$	$I_T = 15\text{mA}, V_{in} = 30\text{Vrms}$ (Fig.1)	—	0.2	—	$\text{V}/\mu\text{s}$

COUPLED ELECTRICAL CHARACTERISTICS (Ta = 25°C)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Trigger LED Current	$I_{FT}$	$V_T = 3\text{V}$	—	5	10	mA
Capacitance Input to Output	$C_S$	$V_S = 0, f = 1\text{MHz}$	—	0.8	—	pF
Isolation Resistance	$R_S$	$V_S = 500\text{V}, \text{R.H.} \leq 60\%$	$1 \times 10^{12}$	$10^{14}$	—	$\Omega$
Isolation Voltage	$BV_S$	AC, 1 minute	2500	—	—	Vrms
		AC, 1 second, in oil	—	5000	—	
		DC, 1 minute, in oil	—	5000	—	Vdc
Turn-on Time	$t_{ON}$	$V_D = 6 \rightarrow 4\text{V}, R_L = 100\Omega$ $I_F = \text{Rated } I_{FT} \times 1.5$	—	30	100	$\mu\text{s}$

Fig.1 dv/dt TEST CIRCUIT

