



# HiPerFRED™ Epitaxial Diode with soft recovery

$I_{FAV} = 2x 100 A$   
 $V_{RRM} = 400 V$   
 $t_{rr} = 30 ns$

$V_{RSM}$	$V_{RRM}$	Type
V	V	
400	400	DSEP 2x 101-04A



miniBLOC, SOT-227 B



Symbol	Conditions	Maximum Ratings	
$I_{FRMS}$		100	A
$I_{FAVM}$	$T_C = 60^\circ C$ ; rectangular, $d = 0.5$	100	A
$I_{FSM}$	$T_{VJ} = 45^\circ C$ ; $t_p = 10 ms$ (50 Hz), sine	1000	A
$E_{AS}$	$T_{VJ} = 25^\circ C$ ; non-repetitive $I_{AS} = 4 A$ ; $L = 180 \mu H$	2	mJ
$I_{AR}$	$V_A = 1.5 \cdot V_R$ typ.; $f = 10 kHz$ ; repetitive	0.4	A
$T_{VJ}$		-40...+150	°C
$T_{VJM}$		150	°C
$T_{stg}$		-40...+150	°C
$P_{tot}$	$T_C = 25^\circ C$	200	W
$V_{ISOL}$	50/60 Hz, RMS $I_{ISOL} \leq 1 mA$	2500	V~
$M_d$	mounting torque (M4)	1.1-1.5/9-13	Nm/lb.in.
	terminal connection torque (M4)	1.1-1.5/9-13	Nm/lb.in.
Weight	typical	30	g

### Features

- International standard package miniBLOC
- Isolation voltage 2500 V~
- UL registered E 72873
- 2 independent FRED in 1 package
- Planar passivated chips
- Very short recovery time
- Extremely low switching losses
- Low  $I_{RM}$ -values
- Soft recovery behaviour

### Applications

- Antiparallel diode for high frequency switching devices
- Antisaturation diode
- Snubber diode
- Free wheeling diode in converters and motor control circuits
- Rectifiers in switch mode power supplies (SMPS)
- Inductive heating
- Uninterruptible power supplies (UPS)
- Ultrasonic cleaners and welders

### Advantages

- Avalanche voltage rated for reliable operation
- Soft reverse recovery for low EMI/RFI
- Low  $I_{RM}$  reduces:
  - Power dissipation within the diode
  - Turn-on loss in the commutating switch

Symbol	Conditions	Characteristic Values	
		typ.	max.
$I_R$ ①	$V_R = V_{RRM}$ ; $T_{VJ} = 25^\circ C$ $T_{VJ} = 150^\circ C$		1 mA 4 mA
$V_F$ ②	$I_F = 100 A$ ; $T_{VJ} = 125^\circ C$ $T_{VJ} = 25^\circ C$		1.24 V 1.54 V
$R_{thJC}$			0.6 K/W
$R_{thCH}$	with heatsink compound	0.1	K/W
$t_{rr}$	$I_F = 1 A$ ; $-di/dt = 400 A/\mu s$ ; $V_R = 30 V$ ; $T_{VJ} = 25^\circ C$	30	ns
$I_{RM}$	$V_R = 100 V$ ; $I_F = 200 A$ ; $-di_F/dt = 100 A/\mu s$ $T_{VJ} = 100^\circ C$	5.5	6.8 A

Pulse test: ① Pulse Width = 5 ms, Duty Cycle < 2.0 %  
 ② Pulse Width = 300  $\mu s$ , Duty Cycle < 2.0 %

Data according to IEC 60747 and per diode unless otherwise specified

IXYS reserves the right to change limits, test conditions and dimensions.

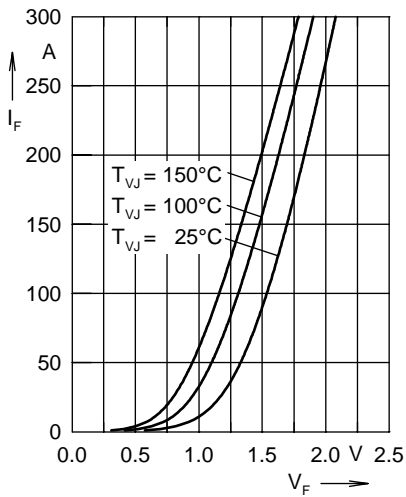


Fig. 1 Forward current  $I_F$  versus  $V_F$

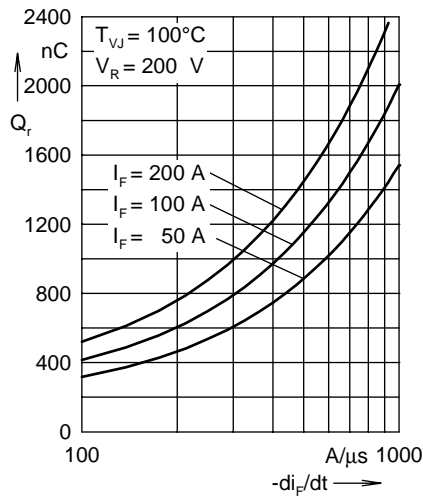


Fig. 2 Typ. reverse recovery charge  $Q_r$  versus  $-di_F/dt$

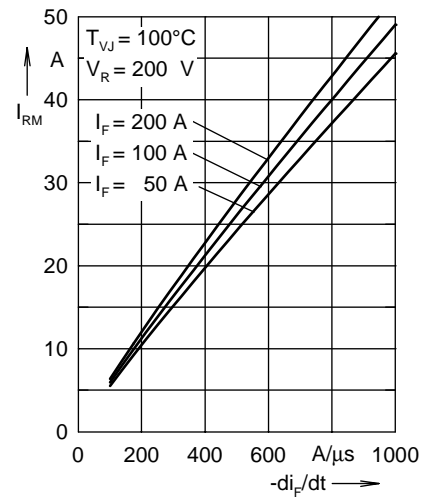


Fig. 3 Typ. peak reverse current  $I_{RM}$  versus  $-di_F/dt$

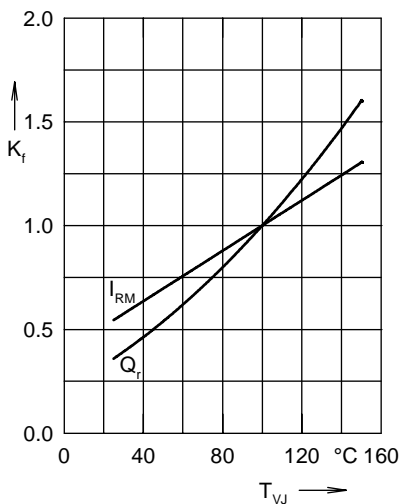


Fig. 4 Typ. dynamic parameters  $Q_r, I_{RM}$  versus  $T_{VJ}$

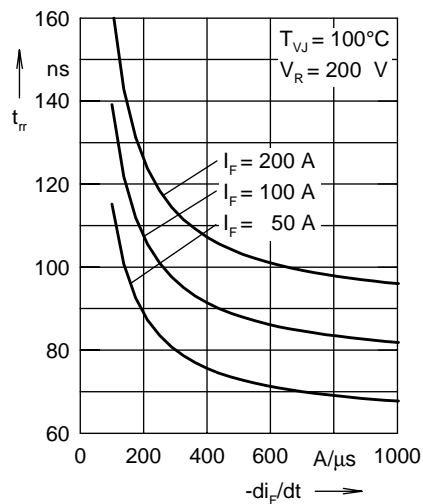


Fig. 5 Typ. recovery time  $t_{tr}$  versus  $-di_F/dt$

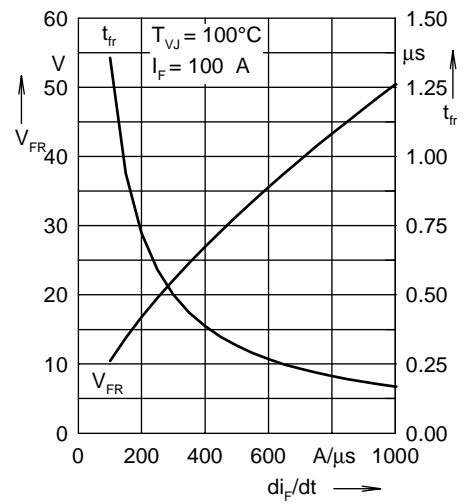


Fig. 6 Peak forward voltage  $V_{FR}$  and  $t_{tr}$  versus  $di_F/dt$

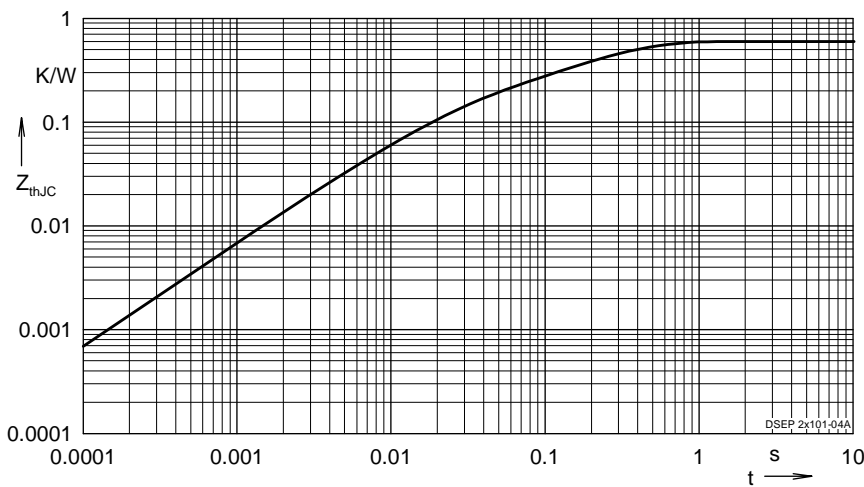


Fig. 7 Transient thermal resistance junction to case

Constants for  $Z_{thJC}$  calculation:

i	$R_{thi}$ (K/W)	$t_i$ (s)
1	0.212	0.0055
2	0.248	0.0092
3	0.063	0.0007
4	0.077	0.0391