



液晶之友 电话: 020-33819057
[Http://www.lcdfriends.com](http://www.lcdfriends.com)

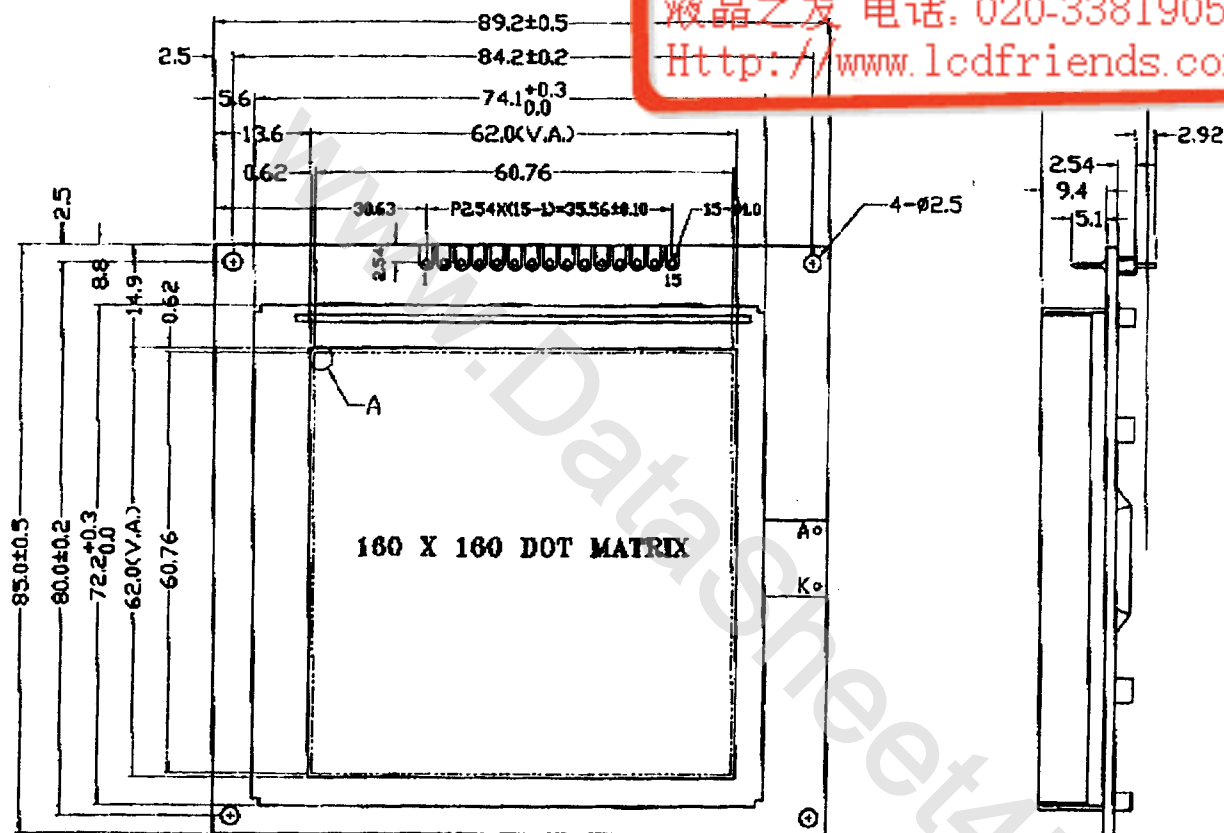

1	VSS
2	M
3	FLM
4	CL1
5	CL2
6	D3
7	D2
8	D1
9	D0
10	VEE
11	VDD
12	V0
13	D.off
14	K
15	A

DETAIL A:



- NOTES:
- 1.DISPLAY TYPE: FSTN
 - 2.VIEWING DIRECTION: 6:00
 - 3.POLARIZER MODE: TRANSLLECTIVE/POSITIVE
 - 4.OPERATING TEMP: -20°C--+70°C
 - 5.STORAGE TEMP: -30°C--+80°C
 - 6.ALL UNMARKED TOLERANCES: ±0.3
 - 7.DRIVE METHOD: DUTY=1/160 BIAS=1/14
 - 8.LCD OPERATING VOLTAGE: 17.0V
 - 9.BACKLIGHT TYPE:LED/YELLOW-GREEN
 - 10.DRIVER: KS0086
 - 11.WITHOUT CONTROLLER
 - 12.BEZEL: PAINT COATING(WHITE)
 - 13.CONNECTOR: TSW-115-24-L-S(SAMTEC)



TIAN-MA MICROELECTRONICS CO.

22/F., WANGDU Building, Shennan Road, Central, Shenzhen, China

DRAWN BY: 张斌	TITLE: TM160160ACCW2	
CHECKED BY: 潘江	DWG NO: G-2	
APPROVED BY: 王新	SCALE:	
CONFIRMED BY:	DWG NAME: TM160160ACCW2 SHEET NO: 1 OF 1	