


# Schottky PowerMod

## CPT40080—CPT400100

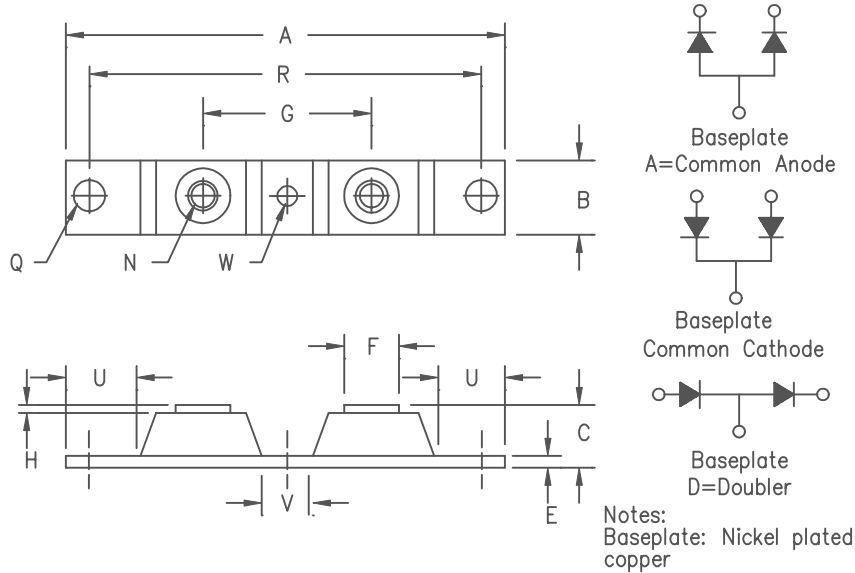

Dim.	Inches		Millimeters		Notes
	Min.	Max.	Min.	Max.	
A	---	3.630	---	92.20	
B	0.700	0.800	17.78	20.32	
C	---	0.630	---	16.00	
E	0.120	0.130	3.05	3.30	
F	0.490	0.510	12.45	12.95	
G	1.375	BSC	34.92	BSC	
H	0.010	---	0.25	---	
N	---	---	---	---	1/4-20
Q	0.275	0.290	6.99	7.37	Dia.
R	3.150	BSC	80.01	BSC	
U	0.600	---	15.24	---	
V	0.312	0.340	7.92	8.64	
W	0.180	0.195	4.57	4.95	Dia.

Microsemi Catalog Number	Industry Part Number	Working Peak Reverse Voltage	Repetitive Peak Reverse Voltage
CPT40080*	403CNQ080	80V	80V
CPT40090*	MBR40080CT	90V	90V
CPT400100*	403CNQ100	100V	100V
	MBRP400100CTL		
	MBR400100CT		

\*Add Suffix A for Common Anode, D for Doubler

- Schottky Barrier Rectifier
- Guard Ring Protection
- 400 Amperes/80–100 Volts
- 175°C Junction Temperature
- Reverse Energy Tested

### Electrical Characteristics

Average forward current per pkg	$I_F(AV)$ 400 Amps	$T_C = 108^\circ C$ , Square wave, $R_{\theta JC} = 0.16^\circ C/W$
Average forward current per leg	$I_F(AV)$ 200 Amps	$T_C = 108^\circ C$ , Square wave, $R_{\theta JC} = 0.32^\circ C/W$
Maximum surge current per leg	$I_{FSM}$ 3000 Amps	8.3ms, half sine, $T_J = 175^\circ C$
Maximum repetitive reverse current per leg	$I_R(OV)$ 2 Amps	$f = 1$ KHZ, $25^\circ C$ , 1 usec square wave
Max peak forward voltage per leg	$V_{FM}$ .91 Volts	$I_{FM} = 200A: T_J = 25^\circ C^*$
Max peak forward voltage per leg	$V_{FM}$ .72 Volts	$I_{FM} = 200A: T_J = 175^\circ C^*$
Max peak reverse current per leg	$I_{RM}$ 100 mA	$V_{RRM}, T_J = 125^\circ C^*$
Max peak reverse current per leg	$I_{RM}$ 5.0 mA	$V_{RRM}, T_J = 25^\circ C$
Typical junction capacitance per leg	$C_J$ 4800 pF	$V_R = 5.0V, T_C = 25^\circ C$

\*Pulse test: Pulse width 300 usec, Duty cycle 2%

### Thermal and Mechanical Characteristics

Storage temp range	$T_{STG}$	-55°C to 175°C
Operating junction temp range	$T_J$	-55°C to 175°C
Max thermal resistance per leg	$R_{\theta JC}$	0.32°C/W Junction to case
Max thermal resistance per pkg	$R_{\theta JC}$	0.16°C/W Junction to case
Typical thermal resistance (greased)	$R_{\theta CS}$	0.08°C/W Case to sink
Terminal Torque		35–50 inch pounds
Mounting Base Torque (outside holes)		30–40 inch pounds
Mounting Base Torque (center hole)		8–10 inch pounds
center hole must be torqued first		
Weight		2.8 ounces (77 grams) typical

# CPT40080 – CPT400100

Figure 1  
Typical Forward Characteristics – Per Leg

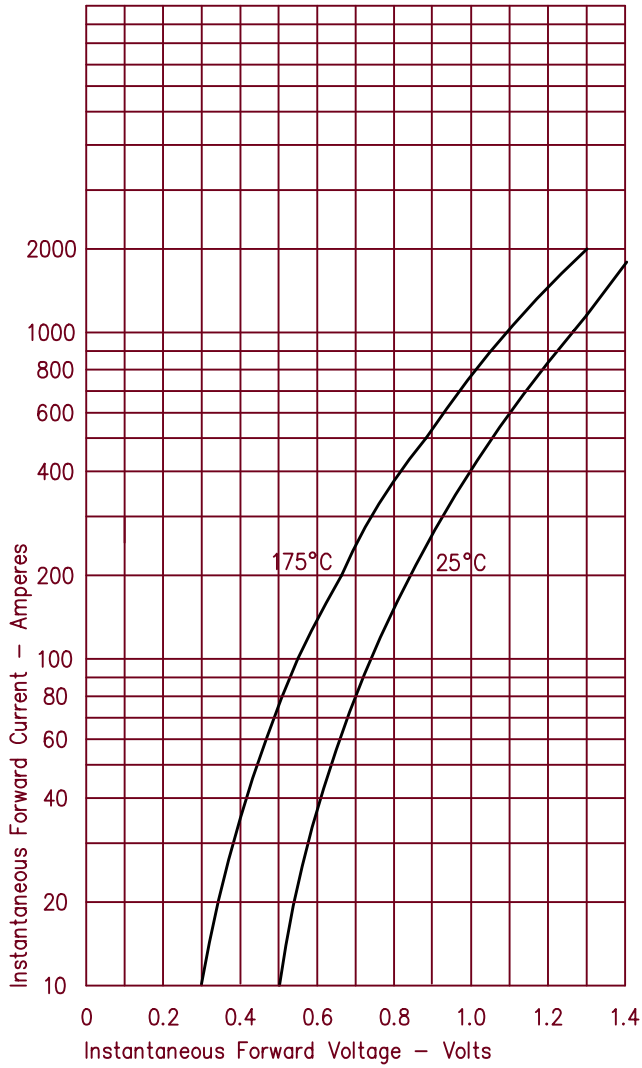


Figure 3  
Typical Junction Capacitance – Per Leg

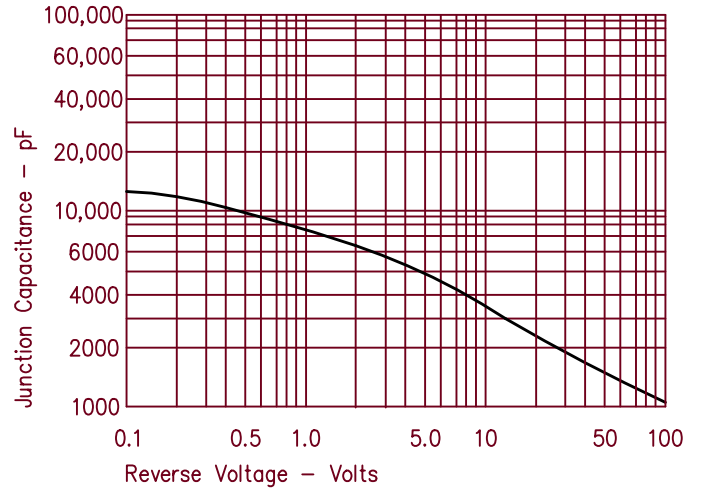


Figure 4  
Forward Current Derating – Per Leg

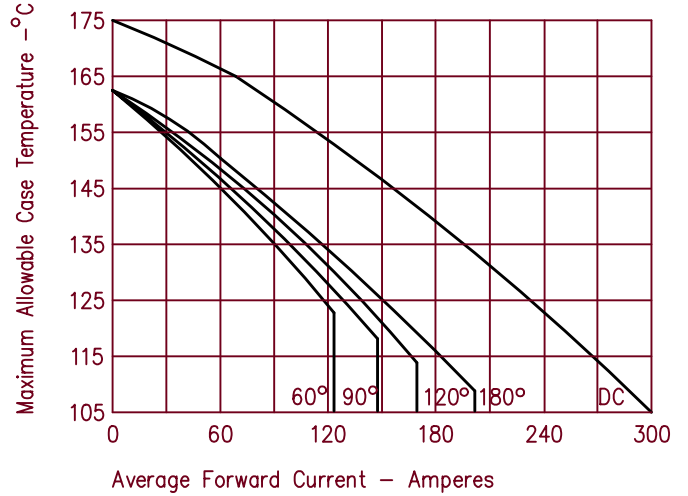


Figure 2  
Typical Reverse Characteristics – Per Leg


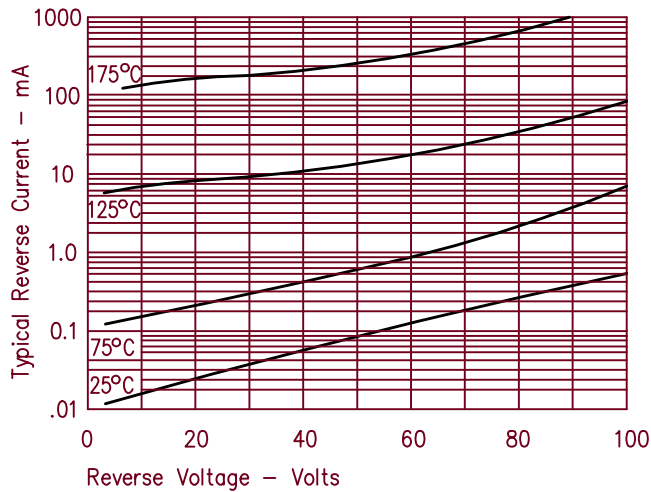


Figure 5  
Maximum Forward Power Dissipation – Per Leg

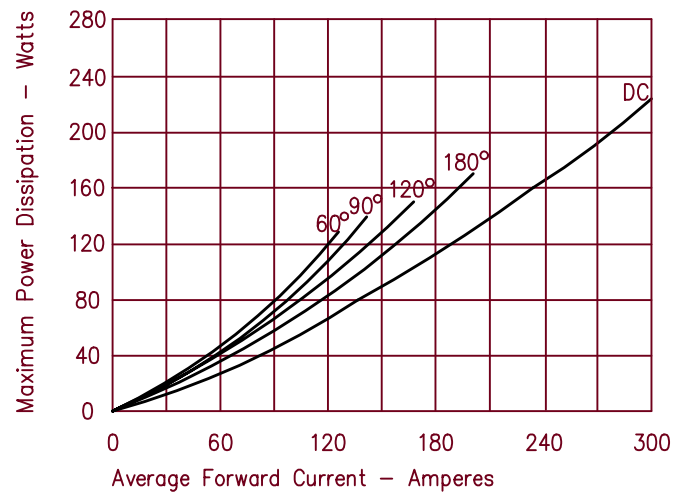

This datasheet has been download from:

[www.datasheetcatalog.com](http://www.datasheetcatalog.com)

Datasheets for electronics components.