


# CERLED<sup>®</sup>

## Ceramic Chip SMD

SMD – Reflective Sensor  
CRS 20

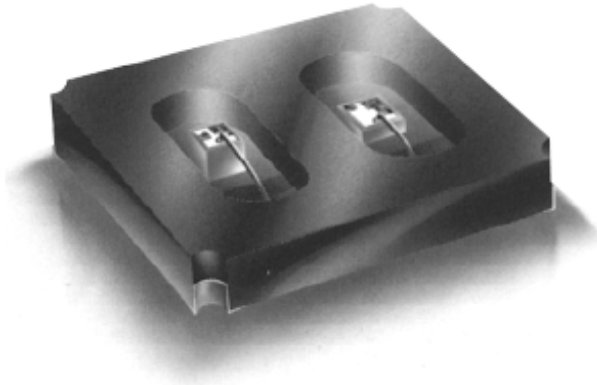


### Description

This opto device is specially designed for all applications where the space is very limited and a highly reliable product is needed. Especially for hybrid and SMT.

The solder pads are a very good heat sink, so that high power dissipation is achievable. Best reflective distance: 0.9 mm (paper).

### Features and Benefits

- ▶ Surface mounting device
- ▶ Complete ceramic housing
- ▶ High temperature range
- ▶ Miniature size
- ▶ Solder pads conform with Mil-Std. 883 B

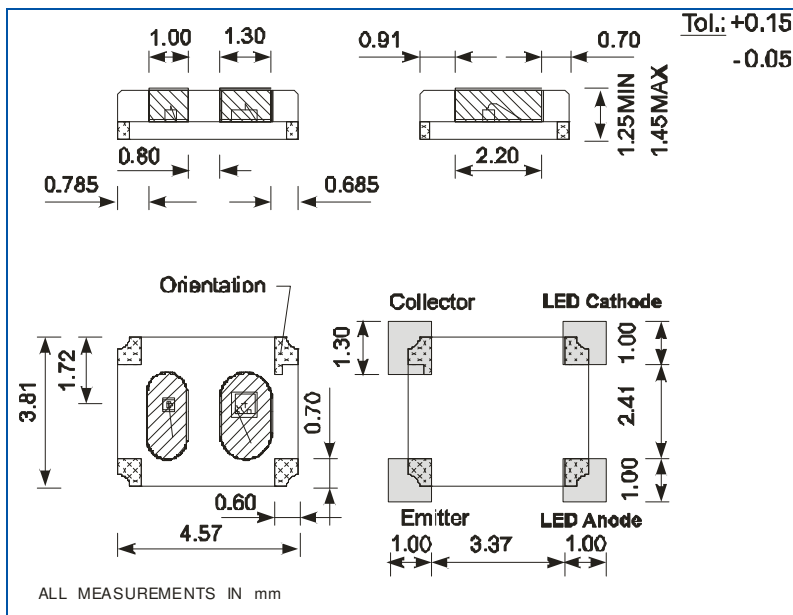

## Maximum Ratings at 25 °C

Total power dissipation	$P_V$	200 mW
Storage temperature	$T_{stg}$	-25 °C to 125 °C
Operating temperature	$T_{op}$	-25 °C to 85 °C
Soldering temperature	$T_{sold}$ (10 s)	240 °C

Note: During solder process the component must not be held or fixed mechanically on the upper part.

### Emitter

Wavelength	$\lambda$	950 nm
Reverse voltage	$V_R$	5 V
Continuous forward current	$I_F$	60 mA
Pulse current (10usec)	$I_{Peak}$ 10 $\mu$ sec	800 mA
Forward voltage	$V_F$	1.2 ... 1.4 V

### Detector


Collector emitter breakdown	$V_{CEO}$	40 V ( $I = 100 \mu A$ )
Emitter collector breakdown	$V_{ECO}$	4.5 V ( $I = 100 \mu A$ )
Dark current	$I_{CEO}$	400 nA ( $V = 20 V$ )
Saturation voltage	$V_{CE sat}$	0.3 V ( $I_B = 1 mA$ ) ( $I_C = 2 mA$ )
Rise / Fall time ( $f = 1 Mhz$ )	$t_{on} / t_{off}$	10 $\mu$ s ( $R = 50 \Omega$ )

Note: according IEC 60825-1 (EN60825):

LED Radiation

Do not view directly with optical instruments.

Figure 1

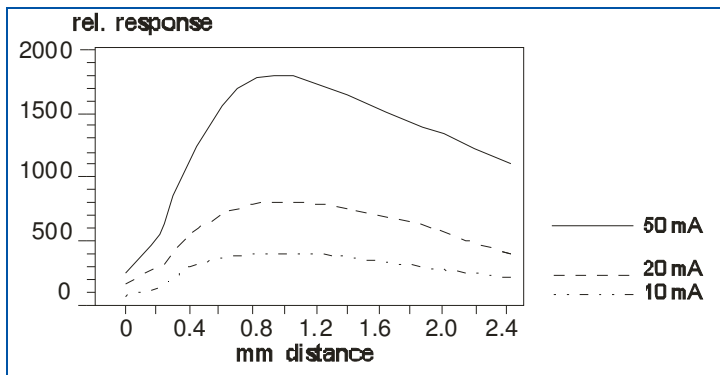

PerkinElmer Elcos GmbH  
European Customer  
Support for LED Solutions  
Luitpoldstrasse 6  
85276 Pfaffenhofen, Germany  
Telephone: (+49)8441-8917-0  
Fax: (+49)8441-71910  
Elcos.sales@perkinelmer.com

European Headquarters  
Wenzel-Jaksch-Strasse 31  
65199 Wiesbaden, Germany  
Telephone: (+49)611-492-247  
Fax: (+49)611-492-170  
opto.Europe@perkinelmer.com

North America  
Customer Support Hub  
22001 Dumberry Road  
Vaudreuil-Dorion, Québec  
Canada J7V 8P7  
Telephone: (+1) 450-424-3300  
(+1) 866-574-6786 (toll-free)  
Fax: (+1) 450-424-3345  
opto@perkinelmer.com

Asia Customer Service Hub  
47 Ayer Rajah Crescent #06-12  
Singapore 139947  
Telephone: (+65)6775-2022  
(+65)67704-366  
Fax: (+65)6775-1008  
opto.Asia@perkinelmer.com



For a complete listing of our global offices, visit [www.optoelectronics.perkinelmer.com](http://www.optoelectronics.perkinelmer.com)

©2005 PerkinElmer, Inc. All rights reserved. The PerkinElmer logo and design are registered trademarks of PerkinElmer, Inc. CERLED® is a trademark of PerkinElmer, Inc. or its subsidiaries, in the United States and other countries. All other trademarks not owned by PerkinElmer, Inc. or its subsidiaries that are depicted herein are the property of their respective owners. PerkinElmer reserves the right to change this document at any time without notice and disclaims liability for editorial, pictorial or typographical errors.  
600054\_01 DTS1005