

# FR151S - FR157S

## 1.5 AMPS. Fast Recovery Rectifiers

### DO-41




## Features

- ✧ High efficiency, Low VF
- ✧ High current capability
- ✧ High reliability
- ✧ High surge current capability
- ✧ Low power loss.

## Mechanical Data

- ✧ Cases: Molded plastic
- ✧ Epoxy: UL 94V-0 rate flame retardant
- ✧ Lead: Pure tin plated, Lead free., solderable per MIL-STD-202, Method 208 guaranteed
- ✧ Polarity: Color band denotes cathode end
- ✧ High temperature soldering guaranteed: 260 °C /10 seconds/.375",(.95mm) lead lengths at 5 lbs.,(2.3kg) tension
- ✧ Weight: 0.32 gram

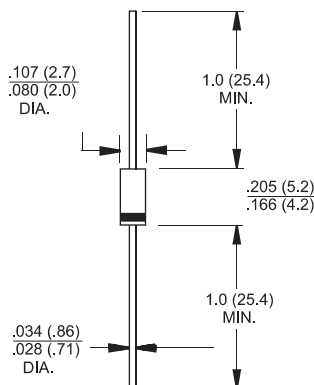

Dimensions in inches and (millimeters)

## Maximum Ratings and Electrical Characteristics

Rating at 25 °C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%

Type Number	Symbol	FR 151S	FR 152S	FR 153S	FR 154S	FR 155S	FR 156S	FR 157S	Units
Maximum Recurrent Peak Reverse Voltage	$V_{RRM}$	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	$V_{RMS}$	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	$V_{DC}$	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current .375"(9.5mm) Lead Length @ $T_A = 55^\circ C$	$I_{(AV)}$	1.5							A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method )	$I_{FSM}$	50							A
Maximum Instantaneous Forward Voltage @ 1.5A	$V_F$	1.2							V
Maximum DC Reverse Current @ $T_A=25^\circ C$ at Rated DC Blocking Voltage @ $T_A=125^\circ C$	$I_R$	5.0 150							$\mu A$ $\mu A$
Maximum Reverse Recovery Time ( Note 1 )	$T_{rr}$	150			250	500		nS	
Typical Junction Capacitance ( Note 2 )	$C_j$	30							pF
Typical thermal Resistance (Note 3)	$R_{\theta JA}$	60							$^\circ C/W$
Operating Temperature Range $T_J$	$T_J$	-65 to +150							$^\circ C$
Storage Temperature Range $T_{STG}$	$T_{STG}$	-65 to +150							$^\circ C$

- Notes:
1. Reverse Recovery Test Conditions:  $I_F=0.5A$ ,  $I_R=1.0A$ ,  $I_{RR}=0.25A$
  2. Measured at 1 MHz and Applied Reverse Voltage of 4.0 Volts D.C.
  3. Mount on Cu-Pad Size 10mm x 10mm on P.C.B.

## RATINGS AND CHARACTERISTIC CURVES (FR151S THRU FR157S)

FIG.1- MAXIMUM FORWARD CURRENT DERATING CURVE

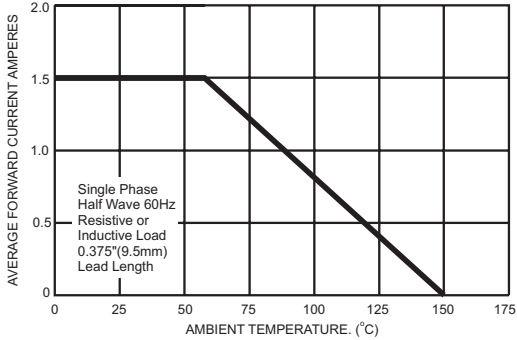


FIG.2- TYPICAL REVERSE CHARACTERISTICS PER LEG

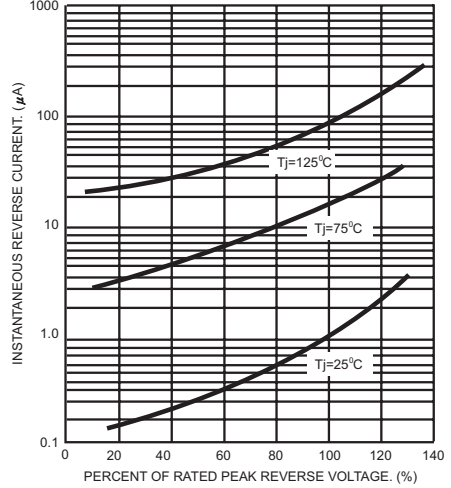


FIG.3- MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

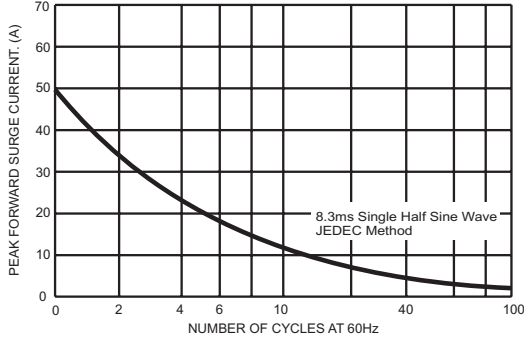


FIG.5- TYPICAL FORWARD CHARACTERISTICS

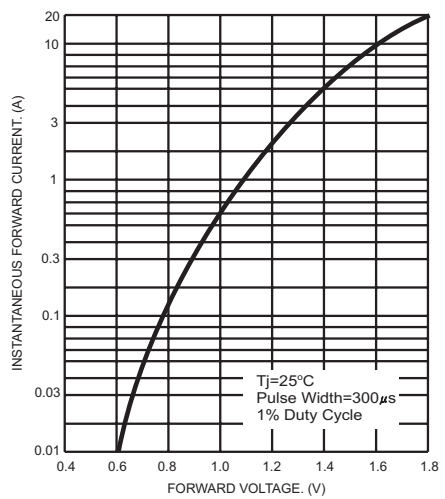


FIG.4- TYPICAL JUNCTION CAPACITANCE

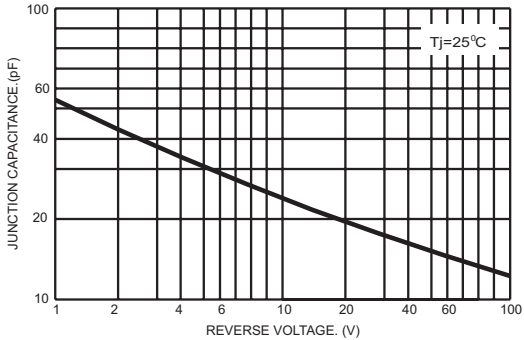


FIG.6- REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

