


ELECTRICAL CHARACTERISTICS :

1. DCR : PIN 6-9 = 10-7 = 0.433 OHM ± 10%
PIN 5-2 = 4-1 = 0.126 OHM ± 10%
2. INDUCTANCE (@10KHZ, 0.1Vrms, 7-9 SHORT) : 10-6 = 800uH ± 5%
3. LEAKAGE INDUCTANCE (@100KHZ , 0.1Vrms, 1-5, 7-9, 2-4 SHORT) :
10-6 = 15uH MAX.
4. INTERWINDING CAP. (@100KHZ, 0.1Vrms, 2-4, 9-7 SHORT) :
1-10 = 30PF MAX.
5. TURN RATIO (@4KHZ, 1Vrms, 2-4, 7-9 SHORT) : 10-6 : 1-5 = 3.3 ± 1%
6. HI-POT (@1500VAC, 1mA, 1MIN, 2-4, 7-9 SHORT) : 1-10 1-CORE, 10-CORE

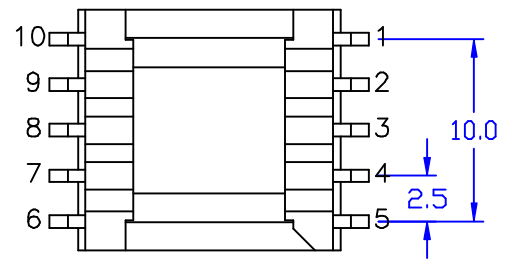

						Atech [®]		TITLE ADSL TRANSFORMER	
						Atech Technology Co.. Ltd.		DWG. NO. ATS-428C	
						TEL:(02)2794-6667 FAX:(02)2794-8004			
RELEASE	08/15/2001	DOLLY	CPLIU	SUEDY	UNITS:	SAFETY		SHEET 1 OF 1	
NO:	DESCRIPTION	DATE	BY	CHK	APPD	M/M			DRAW
REVISIONS						08/15/01		Pair	