

## MULTI LAMPS LED BULB

### Data Sheet

#### **Description:**

These multi lamps LED Bulbs are specifically designed for flashlight electric equipment, indicator light switch and where a wide view angle. The 5mm round shaped radiation pattern (75°) and high luminous intensity ensure that these devices are excellent for wide field of view outdoor applications where a wide viewing angle and readability in sunlight are essential.

High efficiency LED materials are used in this Bulb. Every lamp is made with an advanced optical grade epoxy offering superior high shock and high temperature resistance in outdoor applications.

#### **Feature:**

- Wide view angle
- High luminous output
- Seven kind color
- Solid-state Vibration resistant
- Saving power
- Long life

#### **Option:**

- 6V to 240V AC or DC
- Other industry standard base

***A-BRIGHT***


A-BRIGHT INDUSTRIAL CO.,LTD.

---

**Part No.: AB-1851Y0-28VD-B2G-0**

**Multi Lamps LED Bulb**

**PACKAGE DIMENSIONS:**

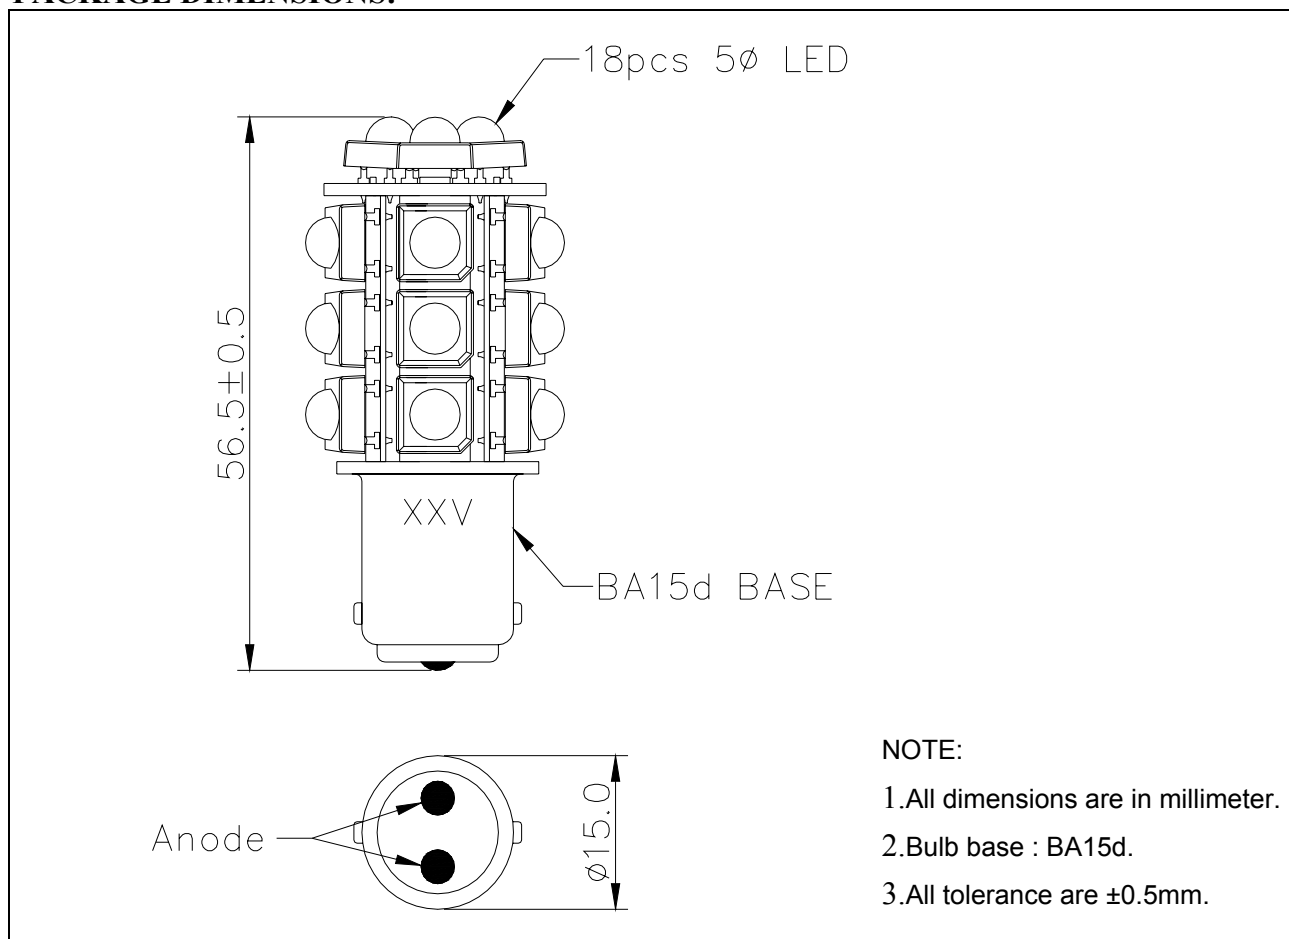

**NOTE:**

1. All dimensions are in millimeter.
2. Bulb base : BA15d.
3. All tolerance are  $\pm 0.5$ mm.

**Part No.: AB-1851Y0-28VD-B2G-0**

**Multi Lamps LED Bulb**

**FEATURE:**

- SUPER LUMINOSITY YELLOW LED (AlGaInP).
- WATER CLEAR PACKAGE.
- 5mm ALL RESIN MOLD.
- WIDE VIEWING ANGLE.
- BASE MODEL BA15d.
- ELECTRIC DC.

**ABSOLUTE MAXIMUM RATING: Ta = 25 °C**

- PEAK OPERATE VOLTAGE..... **33 V**
- OPERATING TEMPERATURE..... **-25 TO +85°C**
- STORAGE TEMPERATURE..... **-35 TO +100°C**
- LED BULB LIFE..... **500000 HOURS**  
(LUMINANCE REDUCES to 50%)

**ABSOLUTE OPTICAL CHARACTERISTIC (Ta= 25°C)**

PARAMETER		SYMBOL	MIN	TYP	MAX	UNIT
Operate Voltage		<b>V</b>	----	<b>28</b>	<b>33</b>	<b>V</b>
Luminous Intensity	<b>IF= 100 mA</b>	<b>Iv</b>	<b>15</b>	<b>20</b>	----	<b>cd</b>
Dominant Wavelength	<b>IF= 100 mA</b>	<b>λd</b>	----	<b>588</b>	----	<b>nm</b>
Spectrum Radiation Bandwidth	<b>IF= 100 mA</b>	<b>Δλ</b>	----	<b>20</b>	----	<b>nm</b>
Forward Current	<b>VIN=28 V DC</b>	<b>IF</b>	----	<b>100</b>	----	<b>mA</b>
Viewing Angle		<b>2θ1/2</b>	----	<b>75</b>	----	<b>deg</b>