

Part No.


**AL-P483BC**

Diff No.

4.8 mm

Type : LED Lamps

Package Dimension :

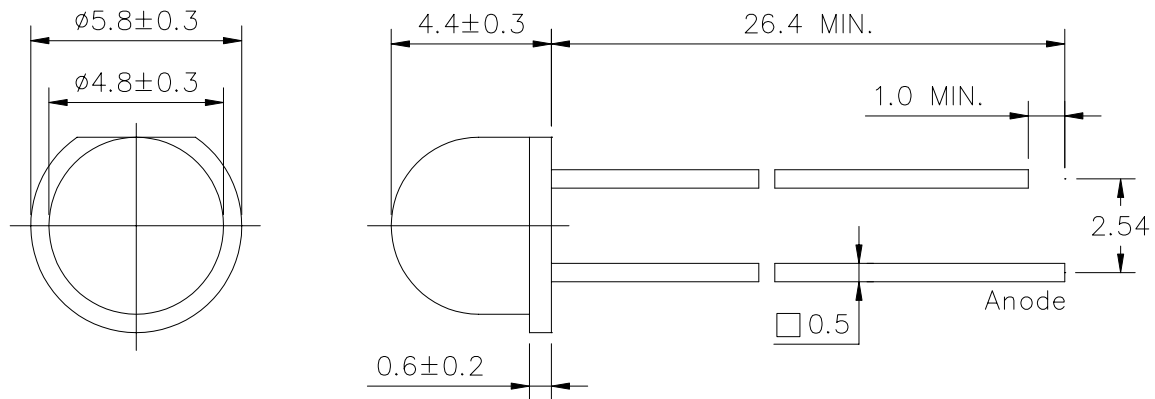

Notes:

1. All dimensions are in millimeter.
2. An epoxy meniscus may extend about.  
1.5 mm (0.059") down to the lead
3. Tolerances unless Dimension  $\pm 0.25$  mm

■ Features :

- Choice of various viewing angles.
- Available on Tape and Reel.
- Reliable and robust.

■ Descriptions :

- The series is specially designed for application requiring higher brightness.
- The LED lamps are available with different colors, intensity, epoxy colors etc.

■ Applications :

- TV set
- Monitor
- Telephone

Part No. **AL-P483BC**

Diff No.

4.8 mm

Type : LED Lamps

| PART NO.  | Chip     |               | Lens Color  |
|-----------|----------|---------------|-------------|
|           | Material | Emitted Color |             |
| AL-P483BC | InGaN    | Blue          | Water Clear |

## ■ Absolute Maximum Ratings at Ta=25℃

| Parameter                                | Symbol                | Rating      | Unit |
|------------------------------------------|-----------------------|-------------|------|
| Forward Current                          | I <sub>F</sub>        | 20          | mA   |
| Operating Temperature                    | T <sub>opr</sub>      | -20 to +85  | ℃    |
| Storage Temperature                      | T <sub>stg</sub>      | -40 to +100 | ℃    |
| Soldering Temperature                    | T <sub>sol</sub>      | 260 ± 5     | ℃    |
| Electrostatic Discharge                  | ESD                   | 1000        | V    |
| Power Dissipation                        | P <sub>D</sub>        | 100         | mW   |
| Peak Forward Current<br>(Duty 1/10@1KHz) | I <sub>F</sub> (Peak) | 100         | mA   |
| Reverse Voltage                          | V <sub>R</sub>        | 5           | V    |

## ■ Electronic Optical Characteristics :

| Parameter                    | Symbol            | Min. | Typ. | Max. | Unit | Condition            |
|------------------------------|-------------------|------|------|------|------|----------------------|
| Luminous Intensity           | I <sub>v</sub>    | 400  | 500  | /    | mcd  | I <sub>F</sub> =20mA |
| Viewing Angle                | 2θ <sub>1/2</sub> | /    | 75   | /    | deg  | I <sub>F</sub> =20mA |
| Peak Wavelength              | λ <sub>p</sub>    | /    | 475  | /    | nm   | I <sub>F</sub> =20mA |
| Dominant Wavelength          | λ <sub>d</sub>    | /    | 470  | /    | nm   | I <sub>F</sub> =20mA |
| Spectrum Radiation Bandwidth | △λ                | /    | 20   | /    | nm   | I <sub>F</sub> =20mA |
| Forward Voltage              | V <sub>F</sub>    | /    | 3.2  | 3.5  | V    | I <sub>F</sub> =20mA |
| Reverse Current              | I <sub>R</sub>    | /    | /    | 10   | μA   | V <sub>R</sub> =5V   |

Part No. **AL-P483BC**

Diff No.

4.8 mm

Type : LED Lamps



## ■ Reliability test items and conditions :

| NO | Item                             | Test Conditions                              | Test Hours/Cycle | Sample Size | Ac/Re |
|----|----------------------------------|----------------------------------------------|------------------|-------------|-------|
| 1  | Solder Heat                      | TEMP : 260°C±5°C                             | 5SEC             | 76PCS       | 0/1   |
| 2  | Temperature Cycle                | H : +85°C 30min<br>└ 5min<br>L : -55°C 30min | 50CYCLES         | 76PCS       | 0/1   |
| 3  | Thermal Shock                    | H : +100°C 5min<br>└ 10sec<br>L : -10°C 5min | 50CYCLES         | 76PCS       | 0/1   |
| 4  | High Temperature Storage         | TEMP : 100°C                                 | 1000HRS          | 76PCS       | 0/1   |
| 5  | Low Temperature Storage          | TEMP : -55°C                                 | 1000HRS          | 76PCS       | 0/1   |
| 6  | DC Operating Life                | TEMP : 25°C<br>I <sub>F</sub> =20mA          | 1000HRS          | 76PCS       | 0/1   |
| 7  | High Temperature / High Humidity | 85°C / 85%RH                                 | 1000HRS          | 76PCS       | 0/1   |

Part No. **AL-P483BC**  
4.8 mm

Diff No.  
Type : LED Lamps

◆ TYPICAL ELECTRICAL-OPTICAL CHARACTERISTICS CURVES

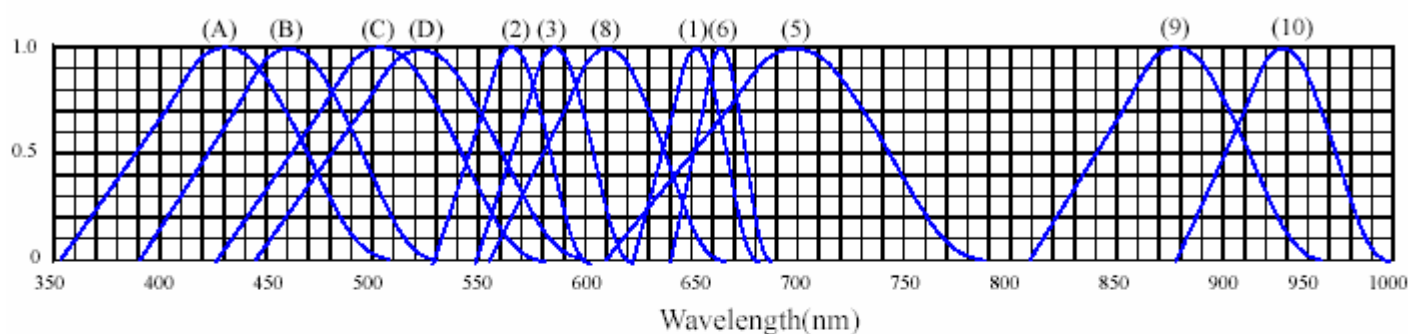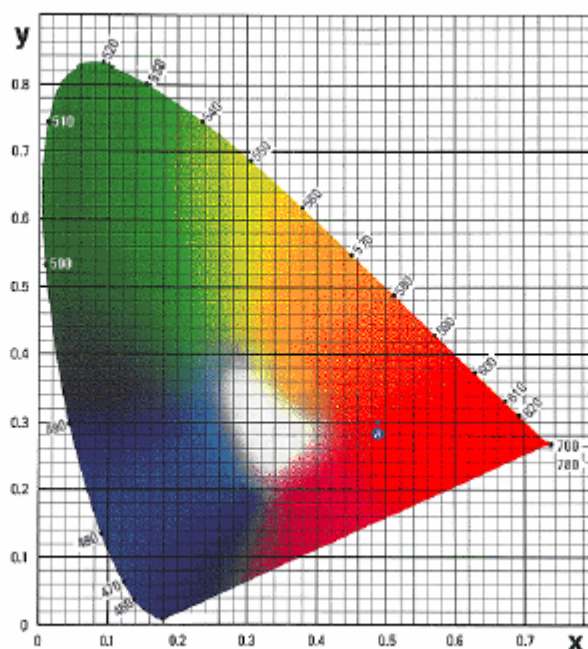

RELATIVE INTENSITY VS. WAVELENGTH( $\lambda_p$ )

- (1) GaAsP/GaAs 655nm/Red
- (2) GaP 568nm/ Yellow Green
- (3) GaAsP/GaP 585nm/Yellow
- (4) GaAsP/GaP 635nm/Orange & Hi-Eff Red
- (5) GaP 700nm/Bright Red
- (6) GaAlAs/GaAs 660nm/Super Red
- (8) GaAsP/GaP 610nm/Super Red

- (9)- GaAlAs 880nm
- (10)-GaAs/GaAs&GaAlAs/GaAs 940nm
- (A)- GaN 430nm/Blue
- (B)- InGaN 470nm/Blue
- (C)- InGaN 502nm/Ultra Green
- (D)- InGaN 523nm/Ultra Green

Part No. **AL-P483BC**


Diff No.

4.8 mm


Type : LED Lamps

◆ CHARACTERISTICS DIAGRAMS

FORWARD CURRENT VS. FORWARD VOLTAGE

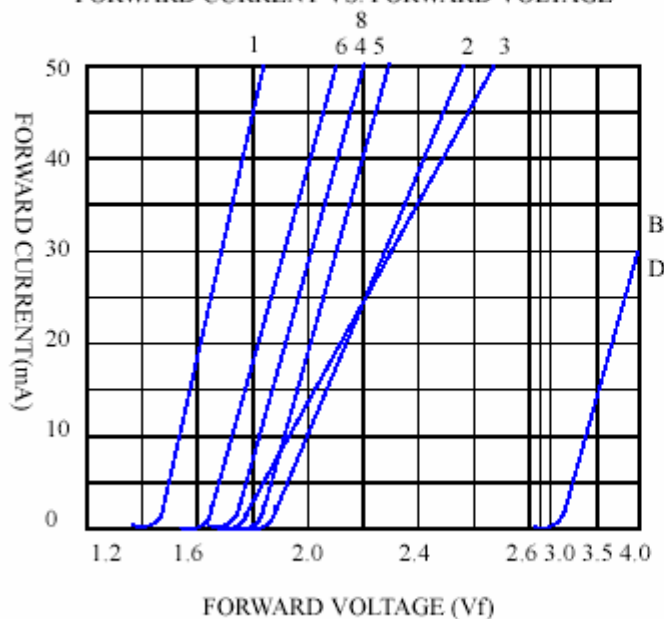

RELATIVE LUMINOUS INTENSITY VS. FORWARD CURRENT

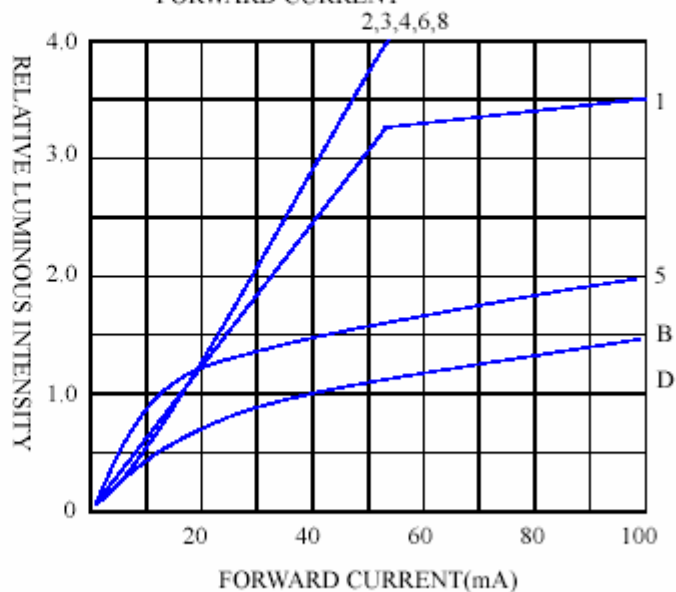

FORWARD CURRENT VS. AMBIENT TEMPERATURE

