


# ST19NP18-TPM

### Trusted Platform Module (TPM)

Data Brief

#### **Features**

- Single-chip Trusted Platform Module (TPM)
- Embedded TPM 1.2 firmware
- TPM driver for BIOS and Windows® 2000/XP
- 33-MHz Low Pin Count (LPC) interface V1.1
- Compliant with TCG PC client specific TPM Implementation Specification (TIS) V1.2
- Dedicated LPC communication buffer for TPM commands handling optimization
- Compliant with Trusted Computing Group (TCG)<sup>(1)</sup> V1.1B / V1.2 specifications
- Architecture based on ST19N Secure Smartcard IC platform:
  - 1088-bit Modular Arithmetic Processor providing full support for Asymmetric operations
  - Hardware-based SHA-1 accelerator enabling BIOS related fast hash operations
  - FIPS 140-2 and AIS-31 compliant True Random Number Generators
  - Active security sensors



- EEPROM-based NVM including 128 Bytes of OTP area for production configuration
  - Highly reliable CMOS EEPROM submicron technology
  - 10 year data retention
  - 500,000 Erase/Write cycle endurance
  - Storage for up to 30 keys
- 5 software-controlled General Purpose I/O (GPIO) pins
- Power-saving mode
- Available in recommended TCG PC client 1.2 compatible TSSOP28 package
- 3.3V ± 10% power supply voltage
- 0 to 70°C operating temperature range

Function	Speed <sup>(1)</sup>
RSA 1024-bit signature with CRT <sup>(1)</sup>	57 ms
RSA 1024-bit signature without CRT <sup>(2)</sup>	189 ms
RSA 1024-bit verification (e='\$10001')	3.7 ms
RSA 1024-bit key generation	1.6 s
RSA 2048-bit signature with CRT <sup>(2)</sup>	382 ms
RSA 2048-bit verification (e='\$10001')	60 ms

Typical values, independent of external clock frequency and supply voltage.

2. CRT: Chinese Remainder Theorem.

<sup>1.</sup> TCG website: http://www.trustedcomputinggroup.org

General description ST19NP18-TPM

#### 1 General description

The ST19NP18-TPM is a cost-effective Trusted Platform Module (TPM) solution. The ST19NP18-TPM is designed to provide PC platforms with enhanced security and integrity mechanisms as defined by Trusted Computing Group standards. The product provides full support of TCG v1.2 specifications.

ST19NP18-TPM is based on the ST19NP18 silicon product.

The ST19NP18 is driven from the Smartcard IC ST19N platform. It is manufactured using the advanced highly reliable STMicroelectronics CMOS EEPROM technology.

The ST19NP18 has an 8-bit CPU architecture and includes the following on-chip memories: User ROM, User RAM and EEPROM with state of the art security features. ROM, RAM and EEPROM memories can be configured into partitions with customized access rules.

The ST19NP18 also includes a Modular Arithmetic Processor (MAP). The 1088-bit architecture of this cryptographic engine allows processing of modular multiplication, squaring and additional calculations up to 2176 bit operands.

The Modular Arithmetic Processor (MAP) is designed to speed up cryptographic calculations using Public Key Algorithms.

The Secure Hash Accelerator allows fast SHA-1 computation especially well suited for BIOS hash operations during early boot stages.

The ST19NP18 is specially designed in line with TCG PC Client Specific TPM Implementation Specification (TIS) referring to Intel's LPC Specification revision 1.1.

ST ROM and **EDES** MAP RAM **EEPROM** User ROM Crypto Accelerator 1088 bits Libraries MEMORY ACCESS FIREWALL ST ROM, MAP and EDES FIREWALL **INTERNAL BUS**  $\hat{\parallel}$ RAM 2K 5 x TRNG A Clock 3 x Security CRC 8-bit SHA 8 hit LPC Generator Admin CPU module TRNG B Interface module Timers nterface LRESET Vps LFrame LPCPD Gpi01 LCLK Gnd Lad3 Lad2 Gpi02 Lad0 Lad1 Gpi03 PP SERIRQ Gpi04 Gpi05 537

Figure 1. ST19NP18 Block Diagram

## 2 Software description

#### 2.1 Embedded TCG TPM firmware


The ST19NP18 includes TPM firmware compatible with TPM V1.2 specifications.

This firmware supports features such as Cryptographic Key Generation, Integrity Metrics and Secure Storage, as well as Locality, Delegation and Transport Session functions.

This TCG TPM firmware uses an optimized and flexible software architecture that easily integrates Trusted Computing Framework enhancements or dedicated functions.

The ST19NP18-TPM provides OEMs with TPM solution for their PC platforms.

Figure 2. Software layers

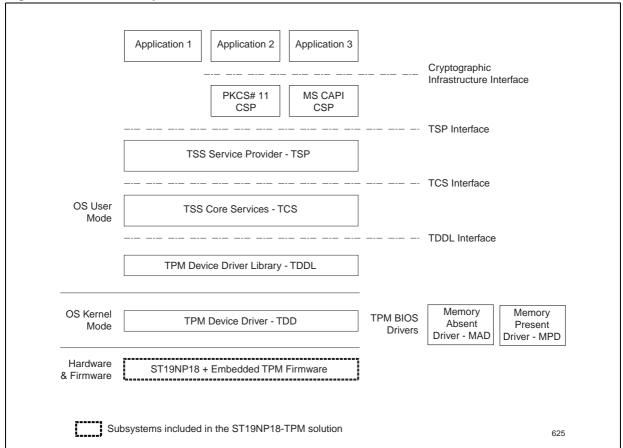

Revision history ST19NP18-TPM

# 3 Revision history

Table 1. Document revision history

Date	Revision	Changes
5-Oct-2006	1	Initial release.

#### Please Read Carefully:

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

UNLESS EXPRESSLY APPROVED IN WRITING BY AN AUTHORIZED ST REPRESENTATIVE, ST PRODUCTS ARE NOT RECOMMENDED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE. ST PRODUCTS WHICH ARE NOT SPECIFIED AS "AUTOMOTIVE GRADE" MAY ONLY BE USED IN AUTOMOTIVE APPLICATIONS AT USER'S OWN RISK.

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2006 STMicroelectronics - All rights reserved BULL CP8 Patents

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

www.st.com

477

Rev 1 5/5